



HEWLETT
PACKARD

**600 WATT ELECTRONIC LOAD MODULE
HP MODEL 60504A**

**FOR MODULES WITH SERIAL NUMBERS:
2917A-00101 AND ABOVE**

600-Watt Module

About This Manual

This manual provides information for the HP 60504A 600-Watt Electronic Load Module. It is designed as a supplement to the the HP 6050A/6051A Multiple Input Electronic Load Operating Manual (part number 06050-90001). Four tables provide the following module-specific information:

Table 60504-1 provides detailed specifications.

Table 60504-2 lists the ranges that can be programmed in constant current, constant resistance, and constant voltage modes. It shows the maximum and minimum programming values for each range. Refer to this table when programming the module locally as described in chapter 4, or remotely as described in chapter 5 of the operating manual.

Table 60504-3 gives the factory default values of the module. Unless you have saved your own wake-up settings, the module will be set to the factory default values whenever power is applied. See chapter 4 in the operating manual.

Table 60504-4 provides calibration information for the module. This information is needed to perform the annual calibration procedure described in chapter 6 of the operating manual.

Module Installation and Operation

Except for the module-specific information in this manual, all installation, operation, and calibration instructions are given in the Electronic Load Operating Manual. The HP Electronic Load Family Programming Reference Manual (part number 06060-90005) contains complete programming details that apply to all Electronic Load models.

Note that in addition to this manual, a 10-pin connector plug is also shipped with your Electronic Load module. Refer to chapter 3 in the operating manual for more information.

MANUAL CHANGES
 Model 60504A 600W Electronic Load Module
 Operating Manual HP P/N 60504-90001
 7/25/90

Make all the corrections according to ERRATA below, then check the following table for your module's serial number and make any listed changes.

| SERIAL NUMBER | | MAKE |
|---------------|-------------|---------|
| prefix | numbers | CHANGES |
| ALL | | ERRATA |
| 2947A | 00551-00570 | 1 |
| 3011A | 00571-00690 | 1 |
| 3036A | 00691-up | 1,2 |

CHANGE 2:

On page 60504-1, delete the 800W contour shown in Figure A. Also delete the figure showing the extended power availability.

Make the following changes in Chapter 2 of the HP 6050A/6051A Mainframe Operating manual (P/N 06050-90001), as they apply to the operation of the HP 60504A:

1) Delete the section titled "Extended Power Operaton". Extended power operation is not applicable to newer electronic load modules.

2) Under the section titled "Protection Features", delete the information under "Extended Power Limit". Also change the 3-second delay referred to under "Nominal Power Limit" to 50 milliseconds.

ERRATA:

Change the following specifications in Table 60504-1 as indicated:

Current Readback Accuracy (after 30 second wait): +/-0.1% +/-110 mA

Current Readback Temperature Coefficient: 100 ppm/C +/-8 mA/C

Voltage Readback Accuracy: +/-0.1% +/-45 mV

Voltage Readback Temperature Coefficient: 100 ppm/C +/-2 mV/C

External Analog Programming Accuracy:
 +/-4% +/-200 mA (0 to 12 A range)
 +/-4% +/-400 mA (0 to 120 A range)

External Current Monitor Temperature Coefficient: 100 ppm/C +/-10 mA/C

CHANGE 1:

In Table 60504-3, change the CURR slew rate factory default setting from 10 A/us to 2 A/us.

Also, add the following note to Table 60504-3: "Note: The *RST command resets the CURR slew rate to 10 A/us and not to the factory default setting."

ACOUSTIC NOISE INFORMATION

This document lists the HP Power Products which, as of April 4, 1991, have been measured in accordance with German acoustic noise Specification 3. GSGV. The results of these measurements are listed below.

The following power supply products have no fan:

| LpA < 70 dB operator position normal operation per ISO 7779 No fan installed | | | | LpA < 70 dB am Arbeitsplatz normaler Betrieb nach DIN 45635 T. 19 Kein Ventilator eingebaut | | | | |
|--|-------|-------|-------|---|--------|--------|------------|------------|
| 6114A | 6212C | 6253A | 6289A | 59501B | 60504A | 69721A | 69754A | 69790B |
| 6115A | 6214C | 6255A | 6291A | 59510A | 60504B | 69730A | 69755A | 69791A |
| 6177C | 6216C | 6263B | 6294A | 59511A | 69700A | 69731B | 69759A | 69792A |
| 6181C | 6218C | 6264B | 6296A | | 69701A | 69734A | 69761A | 69793A |
| 6186C | 6227B | 6266B | 6299A | 60501A | 69702A | 69735A | 69770A | 69793A/J32 |
| | 6228B | 6267B | | 60501B | 69704A | 69736A | 69771A | |
| 6200B | 6234A | 6281A | 6825A | 60502A | 69705A | 69750A | 69774A | |
| 6205C | 6235A | 6282A | 6826A | 60502B | 69706A | 69751A | 69775A | |
| 6206B | 6236B | 6284A | 6827A | 60503A | 69709A | 69752A | 69776A | |
| 6209B | 6237B | 6286A | | 60503B | 69720A | 69753A | 69776A/J32 | |

The following products have fans:

| Lpa < 70 dB operator position normal operation per ISO 7779 | | | | LpA < 70 dB am Arbeitsplatz normaler Betrieb nach DIN 45635 T. 19 | | | | | |
|--|-------|-------|-------|--|-------|-------|-------|-------|-------|
| 6002A | 6024A | 6038A | 6063B | 6621A | 6627A | 6641A | 6652A | 6673A | 6954A |
| 6010A | 6030A | 6050A | | 6622A | 6628A | 6642A | 6653A | 6674A | |
| 6011A | 6031A | 6051A | 6274B | 6623A | 6629A | 6643A | 6654A | 6675A | |
| 6012B | 6032A | 6060A | | 6624A | 6632A | 6644A | 6655A | 6942A | |
| 6015A | 6033A | 6060B | 6434B | 6625A | 6633A | 6645A | 6671A | 6943A | |
| 6023A | 6035A | 6063A | 6448B | 6626A | 6634A | 6651A | 6672A | 6944A | |

The following products exceed 70 dB(A):

| ACOUSTIC NOISE EMISSION | | | | GERAeUSCHEMISSION | | | |
|--|-------|-------|-------|--|-------|-------|-------|
| normal operation operator position LpA = 78.1 dB | | | | normaler Betrieb am Arbeitsplatz LpA = 78.1 dB | | | |
| bystander position LpA = 72.4 dB per ISO 7779 | | | | fiktiver Arbeitsplatz LpA = 72.4 dB nach DIN 45635 T. 19 | | | |
| All data are the results from type tests. | | | | Die Angaben beruhen auf Ergebnissen von Typprüfungen. | | | |
| 6259B | 6261B | 6269B | 6456B | 6464C | 6469C | 6475C | 6479C |
| 6260B | 6268B | 6453A | 6459A | 6466C | 6472C | 6477C | 6483C |


Table 60504-1. Specifications
 (Specifications apply for 25°C ±5°C, except as noted)

DC Input Rating:


Current: 0 to 120 A

Voltage: 3 V to 60 V (minimum dc operation from 0 to 2 V for 0 to 120 A)


Power: 600 W at 40°C (derated to 450 W at 55°C)

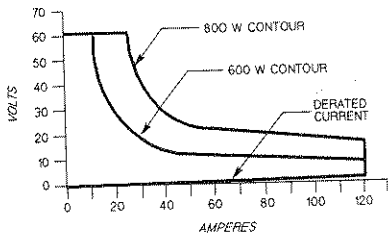

A. OPERATING CHARACTERISTICS

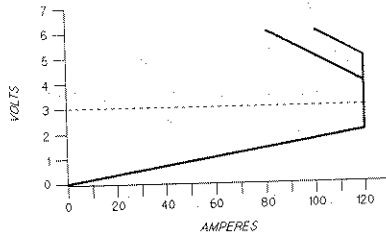

B. DERATED CURRENT DETAIL

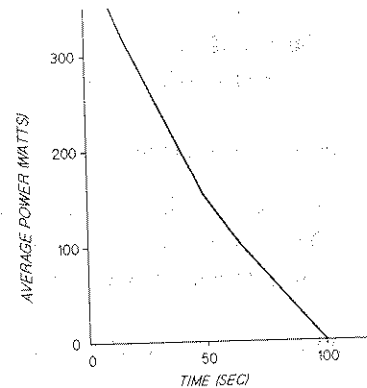

C. EXTENDED POWER AVAILABILITY @ 25 DEGREES C

Constant Current Mode:

Ranges: 0 to 12 A; and 0 to 120 A

Accuracy: (after 30 second wait): ±0.12% ±130 mA (both ranges)

Resolution: 3.2 mA (12 A range); 32 mA (120 A range)

Regulation: 10 mA (both ranges)

Temperature Coefficient: 120 ppm/°C ±8 mA/°C (both ranges)

Constant Resistance Mode:

Ranges: 0.017 to 0.5 Ω; 0.5 Ω to 500 Ω; and 5 Ω to 5 kΩ

Accuracy: ±0.8% ±5 mΩ with ≥12 A at input (0.5 Ω range);

±0.3% ±18 mS with ≥6 V at input (500 and 5 kΩ ranges)

Resolution: 0.14 mΩ (0.5 Ω range); 0.54 mS (500 Ω range); 0.054 mS (5 kΩ range)

Regulation: 20 mV with remote sensing (0.5 Ω range); 10 mA (500 and 5 kΩ ranges)

Temperature Coefficient: 800 ppm/°C ±0.2 mΩ/°C (0.5 Ω range);

300 ppm/°C ±1.2 mS/°C (500 and 5 kΩ ranges)

Constant Voltage Mode:

Range: 0 to 60 V

Accuracy: ±0.1% ±50 mV

Resolution: 16 mV

Regulation: 20 mV (remote sense); 100 mV (local-sense)

Temperature Coefficient: 100 ppm/°C ±5mV/°C

Transient Operation:

Continuous Mode

Frequency Range: 0.25 Hz to 10 kHz

Frequency Resolution: 4%

Frequency Accuracy: 3%

Table 60504-1. Specifications (continued)

Continuous Mode (continued)

Duty Cycle Range: 3% to 97% (0.25 Hz to 1 kHz); 6% to 94% (1 kHz to 10 kHz)

Duty Cycle Resolution: 4%

Duty Cycle Accuracy: 6% of setting $\pm 2\%$

Pulsed Mode

Pulse Width: 50 μs $\pm 3\%$ minimum; 4 s $\pm 3\%$ maximum

Transient Current Level (0 to 12 A and 0 to 120 A ranges):

Resolution: 52 mA (12 A range); 520 mA (120 A range)

Accuracy: $\pm 0.15\% \pm 160$ mA (12 A range); $\pm 0.15\% \pm 700$ mA (120 A range)

Temperature Coefficient: 150 ppm/ $^{\circ}\text{C}$ ± 10 mA/ $^{\circ}\text{C}$

Transient Resistance Level (0.017 to 0.5 Ω , 0.5 Ω to 500 Ω , and 5 Ω to 5 k Ω ranges):

Resolution: 2.2 m Ω (0.5 Ω range); 8.7 mS (500 Ω range); .87 mS (5 k Ω range)

Accuracy: $\pm 0.8\% + 7$ m Ω with ≥ 12 A at input (0.5 Ω range)

$\pm 0.3\% + 26$ mS with ≥ 6 V at input (500 Ω range)

$\pm 0.3\% + 18$ mS with ≥ 6 V at input (5 k Ω range)

Transient Voltage Level (0 to 60 V):

Resolution: 260 mV

Accuracy: $\pm 0.15\% \pm 300$ mV

Temperature Coefficient: 150 ppm/ $^{\circ}\text{C}$ ± 5 mV/ $^{\circ}\text{C}$

Programmable Slew Rate (For any given input transition, the time required will be either the total slew time or a minimum transition time, whichever is longer. The minimum transition time increases when operating with input currents under 2 A. The following are nominal values; $\pm 25\%$ tolerance):

Current Slew Rate:*

| Rate # | 120 A Range Step | 12 A Range Step | Transition Time |
|--------|----------------------|----------------------|-------------------|
| 1 | 2 A/ms | 0.2 A/ms | 8.0 ms |
| 2 | 5 A/ms | 0.5 A/ms | 3.2 ms |
| 3 | 10 A/ms | 1 A/ms | 1.6 ms |
| 4 | 20 A/ms | 2 A/ms | 800 μs |
| 5 | 50 A/ms | 5 A/ms | 320 μs |
| 6 | 100 A/ms | 10 A/ms | 160 μs |
| 7 | 0.2 A/ μs | 20 A/ms | 80 μs |
| 8 | 0.5 A/ μs | 50 A/ms | 32 μs |
| 9 | 1 A/ μs | 100 A/ms | 16 μs |
| 10 | 2 A/ μs | 0.2 A/ μs | 12 μs |
| 11 | 5 A/ μs | 0.5 A/ μs | 12 μs |
| 12 | 10 A/ μs | 1 A/ μs | 12 μs |

*AC performance specified from 3 to 60 V.

Table 60504-1. Specifications (continued)

Voltage Slew Rate:

| Rate # | Voltage Range Step | Transition Time* |
|--------|-----------------------|------------------|
| 1 | 1 V/ms | 8.0 ms |
| 2 | 2.5 V/ms | 3.2 ms |
| 3 | 5 V/ms | 1.6 ms |
| 4 | 10 V/ms | 800 μ s |
| 5 | 25 V/ms | 320 μ s |
| 6 | 50 V/ms | 160 μ s |
| 7 | 0.1 V/ μ s | 85 μ s |
| 8 | 0.25 V/ μ s | 85 μ s |
| 9 | 0.5 V/ μ s | 85 μ s |

*Transition time based on low capacitance current source.

Resistance Slew Rate (0.5 Ω range): Uses the value programmed for voltage slew rate.

Resistance Slew Rate (500 and 5 k Ω ranges): Uses the value programmed for current slew rate.

Current Readback:

Resolution: 34 mA (via HP-IB); 100 mA (front panel)

Accuracy (after 30 second wait): $\pm 0.05\% \pm 130$ mA

Temperature Coefficient: 50 ppm/ $^{\circ}$ C ± 10 mA/ $^{\circ}$ C

Voltage Readback:

Resolution: 17 mV (via HP-IB); 20 mV (front panel)

Accuracy: $\pm 0.05\% \pm 45$ mV

Temperature Coefficient: 50 ppm/ $^{\circ}$ C ± 2 mV/ $^{\circ}$ C

Maximum Readback Capability: 65 to 70 V (typical)

Power Readback:

Accuracy: $\pm 0.2\% \pm 8$ W

External Analog Programming 0 to 10 V (dc or ac):

Bandwidth: 10 kHz (3 db frequency)

Accuracy: $\pm 4.5\% \pm 150$ mA (0 to 12 A range)

$\pm 4.5\% \pm 500$ mA (0 to 120 A range)

$\pm 0.8\% \pm 200$ mV (0 to 60 V range)

Temperature Coefficient: 100 ppm/ $^{\circ}$ C ± 12 mA/ $^{\circ}$ C (current ranges)

100 ppm/ $^{\circ}$ C ± 1 mV/ $^{\circ}$ C (voltage range)

External Current Monitor (0 to 10 V):

Accuracy: $\pm 4\% \pm 170$ mA (referenced to analog common)

Temperature Coefficient: 50 ppm/ $^{\circ}$ C ± 12 mA/ $^{\circ}$ C

Table 60504-1. Specifications (continued)

External Voltage Monitor (0 to 10 V):

Accuracy: $\pm 0.4\% \pm 60$ mV (referenced to analog common)

Temperature Coefficient: 100 ppm/ $^{\circ}$ C ± 2 mV/ $^{\circ}$ C

Remote Sensing: 5 Vdc maximum between sense and input binding posts

Maximum Input Levels:

Current: 122.4 A (programmable to lower limits)

Voltage: 75 V

Minimum Operating Voltage: 2 V (derated to 0 V at 0 A)

Programmable Short Circuit: 0.017 Ω (0.012 Ω typical)

Programmable Open Circuit: 20 k Ω (typical)

Drift Stability (over an 8 hour interval):

Current: $\pm 0.03\% \pm 20$ mA

Voltage: $\pm 0.01\% \pm 10$ mV

PARD (20 Hz to 10 MHz noise):

Current: 6 mA rms/60 mA p-p

Voltage: 8 mV rms

DC Isolation Voltage: ± 240 Vdc between + or - input binding post and chassis ground

Digital Inputs:

Vlo: 0.9 V maximum at $I_{lo} = -1$ mA

Vhi: 3.15 V minimum (pull-up resistor on input)

Digital Outputs:

Vlo: 0.72 V maximum at $I_{lo} = 1$ mA

Vhi: 4.4 V minimum at $I_{lo} = -20$ μ A

Reverse Current Capacity: 120 A when unit is on; 60 A when unit is off

Weight: 5.4 kg (12 lbs.)

Table 60504-2. Programming Ranges

| Function | Front Panel Key | Front Panel Display | HP-SL Command (Short Form) | Range of Values |
|----------------------------|-----------------------|----------------------------|--|--|
| Constant Current | | | | |
| Set Range | Range | C:RNG value | "CURR:RANG value" | ≥ 0 and ≤ 12 A > 12 and ≤ 120 A |
| Low Range | | | | |
| High Range | | | | |
| Set Main Level | CURR | CURR value | "CURR value" | 0 to 12 A 0 to 120 A |
| Low Range | | | | |
| High Range | | | | |
| Set Slew Rate | (shift) Slew | C:SLW value | "CURR:SLEW value" | 0.0002 to 1 (A/ μ s) 0.002 to 10 (A/ μ s) |
| Low Range | | | | |
| High Range | | | | |
| Set Transient Level | Tran Level | C:TIV value | "CURR:TLEV value" | same as main level |
| *Set Triggered Level | | | "CURR:TRIG value" | same as main level |
| Constant Resistance | | | | |
| Set Range | Range | R:RNG value | "RES:RANG value" | ≥ 0 and ≤ 0.5 Ω > 0.5 Ω and ≤ 500 Ω > 500 Ω and ≤ 5 k Ω |
| Low Range | | | | |
| Middle Range | | | | |
| High Range | | | | |
| Set Main Level | RES | RES value | "RES value" | 0 to 0.5 Ω 0.5 Ω to 500 Ω 5 Ω to 5 k Ω |
| Low Range | | | | |
| Middle Range | | | | |
| High Range | | | | |
| Set Slew Rate | (shift) Slew | V:SLW value C:SLW value | "VOLT:SLEW value" "CURR:SLEW value" | same as voltage slew same as current slew |
| Low Range | | | | |
| Middle/High Range | | | | |
| Set Transient Level | Tran Level | R:TIV value | "RES:TLEV value" | same as main level |
| *Set Triggered Level | | | "RES:TRIG value" | same as main level |
| Constant Voltage | | | | |
| Set Main Level | VOLT | VOLT value | "VOLT value" | 0 to 60 V |
| Set Slew Rate | (shift) Slew | V:SLW value | "VOLT:SLEW value" | 0.001 to 0.5 (V/ μ s) |
| Set Transient Level | Tran Level | V:TIV value | "VOLT:TLEV value" | same as main level |
| *Set Triggered Level | | | "VOLT:TRIG value" | same as main level |
| Transient Operation | | | | |
| Set Frequency | Freq | FREQ value | "TRAN:FREQ value" | 0.25 Hz to 10 kHz |
| Set Duty Cycle | (shift) Dcycle | DCYCLE value | "TRAN:DCYC value" | 3-97% (0.25 Hz-1 kHz) 6-94% (1 kHz-10 kHz) |
| *Set Pulse Width | | | "TRAN:TWID value" | 0.00005 to 4 s |
| Trigger Operation | | | | |
| *Set Trigger Period | | | "TRIG:TIM value" | 0.000008 to 4 s |
| Current Protection | | | | |
| *Set Current Level | | | "CURR:PROT value" | 0 to 122.4 A |
| *Set Delay Time | | | "CURR:PROT:DEL value" | 0 to 60 s |

* Can only be programmed remotely via the HP-IB.

Table 60504-3. Factory Default Settings

| Function | Setting | Function | Setting |
|---|---------------|------------------------------------|---------------|
| CURR level | 0 A | Mode (CC, CR, CV) | CC |
| CURR transient level | 0 A | Input (on/off) | on |
| CURR slew rate | 10 A/ μ s | Short (on/off) | off |
| CURR range | 120 A | Transient operation (on/off) | off |
| *CURR protection (on/off) | off | **TRAN mode | continuous |
| *CURR protection level | 122.4 A | (continuous, pulse, toggle) | |
| *CURR protection delay | 15 s | TRAN frequency | 1 kHz |
| RES level | 500 Ω | TRAN duty cycle | 50% |
| RES transient level | 500 Ω | *TRAN pulse width | 0.5 ms |
| RES range | 500 Ω | *TRIG source | hold |
| VOLT level | 60 V | (bus, external, hold, timer, line) | |
| VOLT transient level | 60 V | *TRIG period | 0.001 s |
| VOLT slew rate | 5 V/ μ s | *PORT0 output (on/off) | off (logic 0) |
| | | *CAL mode (on/off) | off |
| * Can only be programmed remotely via the HP-IB. | | | |
| ** Continuous transient mode is the only mode available at the front panel. Pulsed, toggled, and continuous modes can all be programmed remotely via the HP-IB. | | | |

Table 60504-4. Calibration Information

| Ranges and Calibration Points | Variables | Variable Values | Power Supply Settings | Current Shunt |
|-------------------------------|----------------|-----------------|-----------------------|---------------|
| High Current Range | Hi_ curr_ rng | 120 | 5 V/121 A | 200 A |
| High Current Hi point | Hi_ curr_ hipt | 105 | | |
| High Current Lo point | Hi_ curr_ lopt | 3 | | |
| Low Current Range | Lo_ curr_ rng | 12 | 5 V/15 A | 20 A |
| Low Current Hi point | Lo_ curr_ hipt | 11 | | |
| Low Current Lo point | Lo_ curr_ lopt | 1 | | |
| Voltage Range | N/A | N/A | 61 V/10 A | N/A |
| Voltage Hi point | Volt_ hipt | 55 | | |
| Voltage Lo point | Volt_ lopt | 3 | | |
| Low Resistance Range | Lo_ res_ rng | .5 | 15 V/21.8 A | 20 A |
| Low Resistance Hi point | Lo_ res_ hipt | .5 | | |
| Low Resistance Lo point | Lo_ res_ lopt | .017 | | |
| Middle Resistance Range | Mid_ res_ rng | 5 | 10.9 V/30 A | 20 A |
| Middle Resistance Hi point | Mid_ res_ hipt | 15 | | |
| Middle Resistance Lo point | Mid_ res_ lopt | .5 | | |
| High Resistance Range | Hi_ res_ rng | 501 | 60 V/12 A | 20 A |
| High Resistance Hi point | Hi_ res_ hipt | 50 | | |
| High Resistance Lo point | Hi_ res_ lopt | 6 | | |