
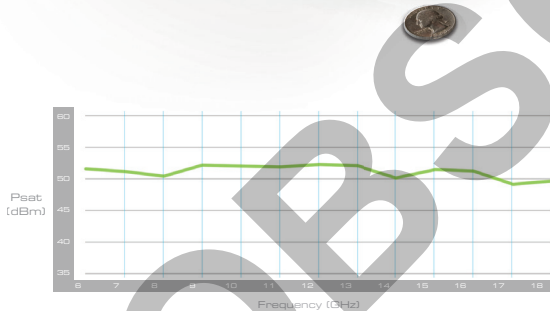


Typical Applications

- Commercial Radar
- Military Radar
- Electronic Warfare
- Test Equipment

Solid State High Power Amplifier

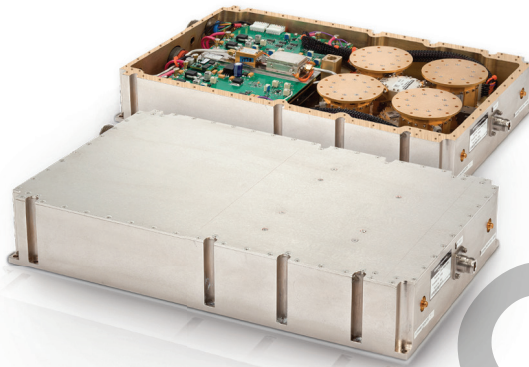

Features

- Highest Power
- Smallest Footprint
- Lightest Weight

General Description

The KHPA-0618 100W is a high power rack mounted microwave amplifier that covers a 12 GHz range in the 6-18 GHz band. The KHPA-0618 provides an output of 100 watts. A number of options are available depending on customer requirements. TTL Local/Remote switching is provided as an option.

Small and rugged, the KHPA-0618 100W is ideal for replacement of TWT amplifiers – offering up to 30 dB improvement in noise and very short group delay characteristics. A small footprint and low power consumption make it excellent for mounting at the antenna or load, and no warm-up time is required, providing instant power-up.

Table 1. Specifications

Input Power	
DC Power	48VDC
Output Specifications [@ 25° C]	
Frequency Range	6 -18 GHz
Saturated Power Output	100 Watts TYP
Gain	60 dB TYP
Noise Figure	5 dB TYP
In/Out VSWR	<2:1 TYP
In/Out Impedance	50 Ω
Local/Remote	TTL
Connectors	
RF In/Out	"N" Female
Mechanical	
Compact Copper Chassis Chassis Grounded	
Environmental	
Operating Temperature	-40° to 50° C
Storage Temperature	-40° to 50° C
Relative Humidity:	5 to 95% non-condensing
MTBF	
200,000 hours	

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106
Phone: 781-329-4700 • Order online at www.analog.com
Application Support: Phone: 1-800-ANALOG-D