

# **492A/492AP 492B/492BP SPECTRUM ANALYZERS**

## **Volume 2**

### **WARNING**

THE FOLLOWING SERVICING INSTRUCTIONS ARE FOR USE BY QUALIFIED PERSONNEL ONLY. TO AVOID PERSONAL INJURY, DO NOT PERFORM ANY SERVICING OTHER THAN THAT CONTAINED IN OPERATING INSTRUCTIONS UNLESS YOU ARE QUALIFIED TO DO SO. REFER TO OPERATORS SAFETY SUMMARY AND SERVICE SAFETY SUMMARY PRIOR TO PERFORMING ANY SERVICE.

*Please Check for CHANGE INFORMATION at the Rear of This Manual*


---

First Printing DEC 1985  
Revised AUG 1989

**Tektronix**<sup>®</sup>  
COMMITTED TO EXCELLENCE

Copyright © 1985,1988 Tektronix, Inc. All rights reserved.  
Contents of this publication may not be reproduced in any  
form without the written permission of Tektronix, Inc.

Products of Tektronix, Inc. and its subsidiaries are covered  
by U.S. and foreign patents and/or pending patents.

TEKTRONIX, TEK, PLOT 10, TEKTEST, SCOPE-  
MOBILE, and  are registered trademarks of Tektronix,  
Inc. TELEQUIPMENT is a registered trademark of  
Tektronix U.K. Limited.

Printed in U.S.A. Specification and price change privileges  
are reserved.

# TABLE OF CONTENTS

This manual is divided into two volumes.

## VOLUME 1

<b>PREFACE</b>	<b>Section 5</b>	<b>ADJUSTMENT PROCEDURE</b>
<b>SAFETY SUMMARY</b>	<b>Section 6</b>	<b>MAINTENANCE</b>
<b>Section 1</b>	<b>Section 7</b>	<b>THEORY OF OPERATION</b>
<b>Section 2</b>	<b>Section 8</b>	<b>OPTIONS</b>
<b>Section 3</b>	<b>Appendix A</b>	<b>GLOSSARY</b>
<b>Section 4</b>		

## VOLUME 2

<b>SAFETY SUMMARY</b>	23A	492A/492AP VIDEO AMPLIFIER
<b>Section 9</b>	23B	492B/492BP VIDEO AMPLIFIER
<b>Section 10</b>	24	VIDEO PROCESSOR
<b>Section 11</b>	25	VERTICAL DIGITAL STORAGE
<b>1</b>	26	HORIZONTAL DIGITAL STORAGE
<b>2</b>	27A	492A/492AP DEFLECTION AMPLIFIERS
<b>3</b>	27B1	492B/492BP DEFLECTION AMPLIFIERS PART 1
<b>4</b>	27B2	492B/492BP DEFLECTION AMPLIFIERS PART 2
<b>5A</b>	28	Z-AXIS & RF INTERFACE
<b>5B</b>	29	HIGH VOLTAGE SUPPLY
<b>6</b>	30	CRT READOUT
<b>7</b>	31	SWEEP
<b>8</b>	32	SPAN ATTENUATOR
<b>9</b>	33	1st LO DRIVER
<b>10</b>	34	PRESELECTOR DRIVER (Option 01 Only)
<b>11</b>	35	CENTER FREQUENCY CONTROL
<b>12</b>	36	HARMONIC MIXER & PHASE GATE
<b>13</b>	37	AUXILIARY SYNTHESIZER
<b>14</b>	38	COUNTER
<b>15</b>	39	PHASE LOCK SYNTHESIZER (SYNTHESIZER)
<b>16</b>	40	PHASE LOCK SYNTHESIZER (PHASE LOCK)
<b>17</b>	41	PROCESSOR
<b>18</b>	42	MEMORY
<b>19A</b>	43	ROM BANKS & GPIB
<b>19B</b>	44	ACCESSORIES INTERFACE
<b>20</b>	45	FRONT PANEL
<b>21A</b>	46	MAIN POWER SUPPLY (PRIMARY SECTION)
<b>21B</b>	47	MAIN POWER SUPPLY & FAN DRIVE (SECONDARY SECTION)
<b>22A</b>	48	MOTHER BOARD (FRONT)
<b>22B</b>	49	MOTHER BOARD (REAR)
	50	492B/492BP REFERENCE LOCK
	<b>Section 12</b>	<b>REPLACEABLE MECHANICAL PARTS</b>



# LIST OF ILLUSTRATIONS

The following figures are located near their associated diagrams in Section 11.

- |        |   |        |  |
|--------|---|--------|--|
| 11-1   | A16A1—1st LO Interface circuit board.             | 11-26A | A68A9—VR Post Amplifier circuit board.                               |
| 11-2   | A18A1—2072 MHz 2nd Converter circuit board.       | 11-27  | A62A1—Log Amplifier circuit board.                                   |
| 11-3   | A22A1—16-20 MHz Phase Lock circuit board.         | 11-27A | A62A1—Log Amplifier circuit board.                                   |
| 11-4   | A22A2A1—2182 MHz Microstrip Osc. circuit board.   | 11-27B | A62A1—Log Amplifier circuit board.                                   |
| 11-5   | A22A2A2—2200 MHz Reference circuit board.         | 11-28  | A40—Video Processor circuit board.                                   |
| 11-6   | A22A2A3—2200 MHz Reference Mixer circuit board.   | 11-29  | A61A1—Vertical Digital Storage circuit board.                        |
| 11-7   | A23A1—719 MHz 2nd LO circuit board.               | 11-30  | A60—Horizontal Digital Storage circuit board.                        |
| 11-8   | A23A2—25 MHz Phase Lock circuit board.            | 11-31  | A64A1—Deflection Amplifiers circuit board.                           |
| 11-9   | A23A3—Harmonic Mixer circuit board.               | 11-31A | A64A1—Deflection Amplifiers circuit board.                           |
| 11-10  | A23A4—829 MHz Diplexer circuit board.             | 11-32  | A70—Z-Axis & RF Interface circuit board.                             |
| 11-11  | A23A5—829 MHz Amplifier circuit board.            | 11-33  | A74—High Voltage circuit board.                                      |
| 11-12  | A23A6—110 MHz IF Select circuit board.            | 11-34  | A66A1—CRT Readout circuit board.                                     |
| 11-13  | A23A7—829 MHz 2nd Converter circuit board.        | 11-35  | A72—Sweep circuit board.   |
| 11-14  | A32A1—110 MHz IF Amplifier circuit board.         | 11-36  | A48A1—Span Attenuator circuit board.                                 |
| 11-15  | A34A1—100 MHz Osc. & 3rd Conv. circuit board.     | 11-37  | A44A1—1st LO Driver circuit board.                                   |
| 11-16  | A34A3A1—50/75Ω Cal Out circuit board (Option 07). | 11-38  | A42A1—Preselector Driver circuit board. (Option 01 Instruments only) |
| 11-17  | A19A1—110 MHz IF Out circuit board (Option 42).   | 11-39  | A46A1—CF Control circuit board.                                      |
| 11-18  | A68A—VR Mother board #1.                          | 11-40  | A26A1—Auxiliary Synthesizer circuit board.                           |
| 11-19  | A68A2—VR Mother board #2.                         | 11-41  | A51A1—Counter circuit board.   |
| 11-20  | A68A3—VR Input circuit board.                     | 11-42  | A50A1—Synthesizer circuit board.                                     |
| 11-20A | A68A3—VR Input circuit board                      | 11-43  | A50A2—Strobe Driver circuit board (front).                           |
| 11-21  | A68A4—VR 1st Filter Select circuit board.         | 11-44  | A50A2—Strobe Driver circuit board (rear).                            |
| 11-21A | A68A4—VR 1st Filter Select circuit board.         | 11-45  | A50A3—Offset Mixer circuit board.                                    |
| 11-22  | A68A5—VR 10 dB Gain Steps circuit board.          | 11-46  | A50A4—Error Amplifier circuit board.                                 |
| 11-23  | A68A6—VR 20 dB Gain Steps circuit board.          | 11-47  | A50A5—Controlled Oscillator circuit board.                           |
| 11-24  | A68A7—VR Band Leveling circuit board.             | 11-48  | A58—Processor circuit board.   |
| 11-25  | A68A8—VR 2nd Filter Select circuit board.         | 11-49  | A54—Memory circuit board.  |
| 11-25A | A68A8—VR 2nd Filter Select circuit board.         | 11-50  | A56—GPIB circuit board (front)                                       |
| 11-26  | A68A9—VR Post Amplifier circuit board.            | 11-51  | A56—GPIB circuit board (rear).                                       |
|        |   | 11-52  | A30A76—Accessories Interface circuit board.                          |
|        |   | 11-53  | A38—Front Panel circuit board.                                       |
|        |   | 11-54  | A30A1—Main Power Supply circuit board.                               |
|        |   | 11-55  | A30A2—Fan Drive circuit board.                                       |
|        |   | 11-56  | A36A1—Reference Lock circuit board.                                  |
|        |   | 11-57  | A36A2—Reference Lock Regulator circuit board.                        |

# SAFETY SUMMARY

(Refer all servicing to qualified servicing personnel)

The safety information in this summary is for both operating and servicing personnel. Specific warnings and cautions will be found throughout the manual where they apply, but may not appear in this summary.

## CONFORMANCE TO INDUSTRY STANDARDS

This instrument complies with the following Industry Safety Standards and Regulatory Requirements.

### Safety

**CSA:** Electrical Bulletin

**FM:** Electrical Utilization Standard Class 3820

**ANSI C39.5** — Safety Requirements for Electrical and Electronic Measuring and Controlling Instrumentation.

**IEC 348** (2nd edition) — Safety Requirements for Electronic Measuring Apparatus.

### Regulatory Requirements

**VDE 0871 Class B** — Regulations for RFI Suppression of High Frequency Apparatus and Installations.

## TERMS

### In This Manual

**CAUTION** statements identify conditions or practices that could result in damage to the equipment or other property.

**WARNING** statements identify conditions or practices that could result in personal injury or loss of life.

### As Marked on Equipment

**CAUTION** indicates a personal injury hazard not immediately accessible as one reads the marking, or a hazard to property, including the equipment itself.

**DANGER** indicates a personal injury hazard immediately accessible as one reads the marking.

## SYMBOLS

### In This Manual



This symbol indicates where applicable cautionary or other information is to be found.

### As Marked on Equipment



**DANGER** — High voltage.



Protective ground (earth) terminal.



**ATTENTION** — refer to manual.



Refer to manual

## POWER

### Power Source

This product is intended to operate from a power source that will not apply more than 250 V rms between the supply conductors or between either supply conductor and ground. A protective ground connection by way of the grounding conductor in the power cord is essential for safe operation.

### Grounding the Product

This product is grounded through the grounding conductor of the power cord. To avoid electrical shock, plug the power cord into a properly wired receptacle before connecting it to the power terminal. A protective ground connection by way of the grounding conductor in the power cord is essential for safe operation.

### Danger From Loss of Ground

Upon loss of the protective-ground connection, all accessible conductive parts (including knobs and controls that may appear to be insulating) can render an electric shock.

### **Use the Proper Power Cord**

Use only the power cord and connector specified for your product.

Use only a power cord that is in good condition.

CSA certification applies to the spectrum analyzer with CSA-certified power cords only (the power cord shipped with your instrument and Tektronix Option A4). International power cords (Tektronix Options A1, A2, A3, and A5) are approved only for the country of use, and are not included in the CSA certification.

Refer cord and connector changes to qualified service personnel.

For detailed information on power cords and connectors, see the Maintenance section in the Service Manual, Volume 1.

### **Use the Proper Fuse**

To avoid fire hazard or equipment damage, use only the fuse of correct type, voltage rating, and current rating for your product (as specified in the Replaceable Electrical Parts list in Volume 2 of the Service Manual). Refer fuse replacement to qualified service personnel.

## **OPERATIONAL PRECAUTIONS**


### **Do Not Operate in Explosive Atmospheres**

To avoid explosion, do not operate this product in an explosive atmosphere unless it has been specifically certified for 494AP Programmers such operation.

### **Do Not Remove Covers or Panels**

To avoid personal injury, do not remove the product covers or panels unless you are qualified to do so. Do not operate the product without the covers and panels properly installed.

Dangerous voltages exist at several points in this product. To avoid personal injury, do not touch exposed connections and components while power is on. REFER ALL SERVICING TO QUALIFIED SERVICE PERSONNEL.

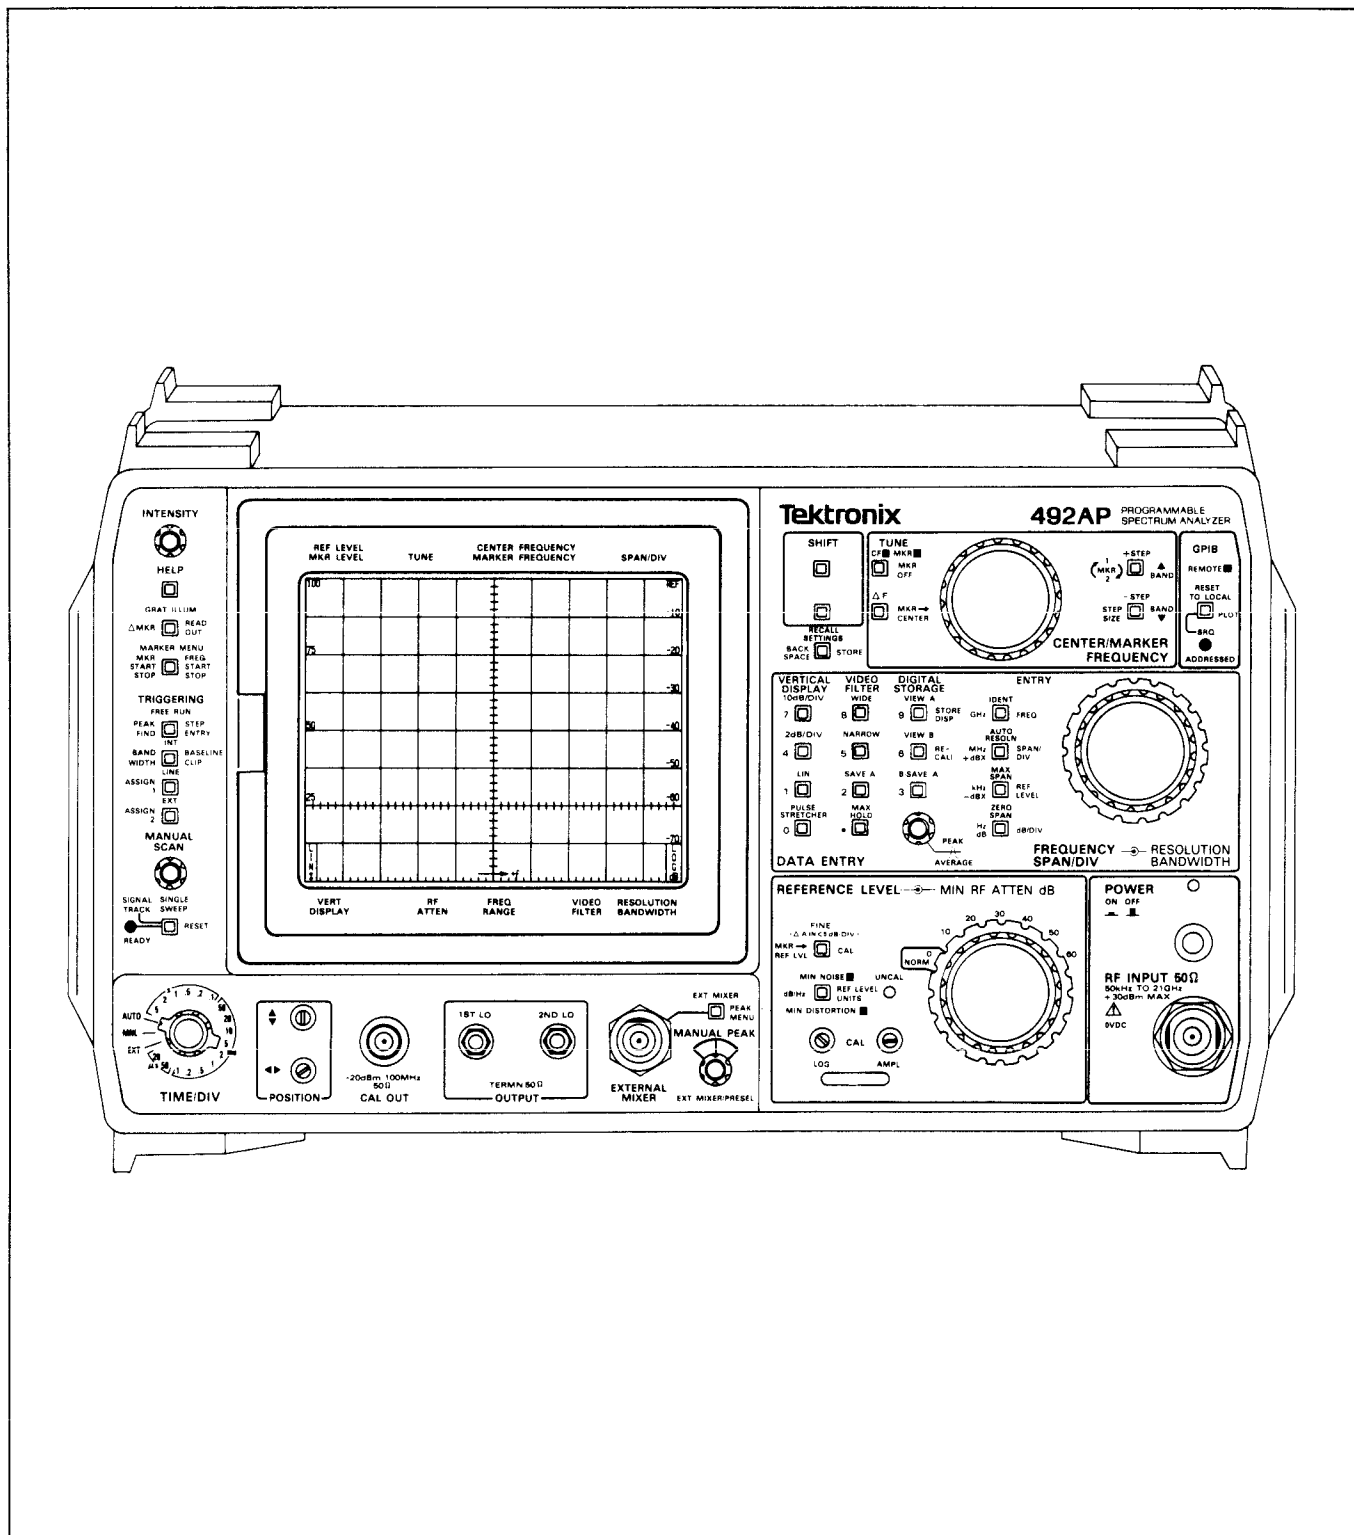

The 492AP Spectrum Analyzer.



# REPLACEABLE ELECTRICAL PARTS

## PARTS ORDERING INFORMATION

Replacement parts are available from or through your local Tektronix, Inc. Field Office or representative.

Changes to Tektronix instruments are sometimes made to accommodate improved components as they become available, and to give you the benefit of the latest circuit improvements developed in our engineering department. It is therefore important, when ordering parts, to include the following information in your order: Part number, instrument type or number, serial number, and modification number if applicable.

If a part you have ordered has been replaced with a new or improved part, your local Tektronix, Inc. Field Office or representative will contact you concerning any change in part number.

Change information, if any, is located at the rear of this manual.

### LIST OF ASSEMBLIES

A list of assemblies can be found at the beginning of the Electrical Parts List. The assemblies are listed in numerical order. When the complete component number of a part is known, this list will identify the assembly in which the part is located.

### CROSS INDEX-MFR. CODE NUMBER TO MANUFACTURER


The Mfr. Code Number to Manufacturer index for the Electrical Parts List is located immediately after this page. The Cross Index provides codes, names and addresses of manufacturers of components listed in the Electrical Parts List.

### ABBREVIATIONS


Abbreviations conform to American National Standard Y1.1.

### COMPONENT NUMBER (column one of the Electrical Parts List)

A numbering method has been used to identify assemblies, subassemblies and parts. Examples of this numbering method and typical expansions are illustrated by the following:



**Read: Resistor 1234 of Assembly 23**

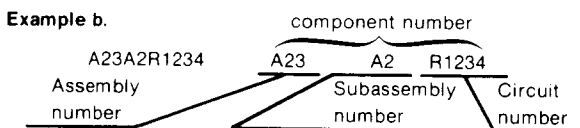

**Read: Resistor 1234 of Subassembly 2 of Assembly 23**

Only the circuit number will appear on the diagrams and circuit board illustrations. Each diagram and circuit board illustration is clearly marked with the assembly number. Assembly numbers are also marked on the mechanical exploded views located in the Mechanical Parts List. The component number is obtained by adding the assembly number prefix to the circuit number.

The Electrical Parts List is divided and arranged by assemblies in numerical sequence (e.g., assembly A1 with its subassemblies and parts, precedes assembly A2 with its subassemblies and parts).

Chassis-mounted parts have no assembly number prefix and are located at the end of the Electrical Parts List.

### TEKTRONIX PART NO. (column two of the Electrical Parts List)

Indicates part number to be used when ordering replacement part from Tektronix.

### SERIAL/MODEL NO. (columns three and four of the Electrical Parts List)

Column three (3) indicates the serial number at which the part was first used. Column four (4) indicates the serial number at which the part was removed. No serial number entered indicates part is good for all serial numbers.

### NAME & DESCRIPTION (column five of the Electrical Parts List)

In the Parts List, an Item Name is separated from the description by a colon (:). Because of space limitations, an Item Name may sometimes appear as incomplete. For further Item Name identification, the U.S. Federal Cataloging Handbook H6-1 can be utilized where possible.

### MFR. CODE (column six of the Electrical Parts List)

Indicates the code number of the actual manufacturer of the part. (Code to name and address cross reference can be found immediately after this page.)

### MFR. PART NUMBER (column seven of the Electrical Parts List)

Indicates actual manufacturers part number.

CROSS INDEX - MFR. CODE NUMBER TO MANUFACTURER

Mfr. Code	Manufacturer	Address	City, State, Zip Code
00213	NYTRONICS COMPONENTS GROUP INC SUBSIDIARY OF NYTRONICS INC	ORANGE ST	DARLINGTON SC 29532
00681	MINE SAFETY APPLIANCE CO CATALYST RESEARCH DIV	1421 CLARKVIEW RD	BALTIMORE MD 21209-2103
00779	AMP INC	2800 FULLING MILL PO BOX 3608	HARRISBURG PA 17105
00809	CROVEN CRYSTALS SUB OF ELECTRONIC TECHNOLOGIES INC	500 BEECH ST PO BOX 420	WHITBY ONT CAN L1N 5S5
00853	SANGAMO WESTON INC COMPONENTS DIV	SANGAMO RD PO BOX 128	PICKENS SC 29671-9716
01121	ALLEN-BRADLEY CO	1201 S 2ND ST	MILWAUKEE WI 53204-2410
01281	TRW ELECTRONICS AND DEFENSE SECTOR RF DEVICES	14520 AVIATION BLVD	LAWDALE CA 90260-1121
01295	TEXAS INSTRUMENTS INC SEMICONDUCTOR GROUP	13500 N CENTRAL EXP PO BOX 655012	DALLAS TX 75265
02111	HAMILTON STANDARD CONTROLS INC SPECTROL DIV	17070 E GALE AVE P O BOX 1220	CITY OF INDUSTRY CA 91749
02114	AMPEREX ELECTRONIC CORP FERROXCUBE DIV	5083 KINGS HWY	SAUGERTIES NY 12477
02735	RCA CORP SOLID STATE DIVISION	ROUTE 202	SOMERVILLE NJ 08876
03508	GENERAL ELECTRIC CO SEMI-CONDUCTOR PRODUCTS DEPT	W GENESEE ST	AUBURN NY 13021
03888	PYROFILM DIV DIV OF KDI ELECTRONICS INC	60 S JEFFERSON RD	WHIPPANY NJ 07981-1001
04099	CAPCO INC	1328 WINTERS AVE PO BOX 1028	GRAND JUNCTION CO 81502
04222	AVX CERAMICS DIV OF AVX CORP	19TH AVE SOUTH P O BOX 867	MYRTLE BEACH SC 29577
04713	MOTOROLA INC SEMICONDUCTOR PRODUCTS SECTOR	5005 E MCDOWELL RD	PHOENIX AZ 85008-4229
05397	UNION CARBIDE CORP MATERIALS SYSTEMS DIV	11901 MADISON AVE	CLEVELAND OH 44101
05828	GENERAL INSTRUMENT CORP GOVERNMENT SYSTEMS DIV	600 W JOHN ST	HICKSVILLE NY 11802
06665	PRECISION MONOLITHICS INC SUB OF BOURNS INC	1500 SPACE PARK DR	SANTA CLARA CA 95050
07088	KELVIN ELECTRIC CO	5907 NOBLE AVE	VAN NUYS CA 91411
07263	FAIRCHILD SEMICONDUCTOR CORP NORTH AMERICAN SALES	10400 RIDGEVIEW CT	CUPERTINO CA 95014
07716	SUB OF SCHLUMBERGER LTD MS 118 TRW INC	2850 MT PLEASANT AVE	BURLINGTON IA 52601
11236	TRW IRC FIXED RESISTORS/BURLINGTON CTS CORP BERNE DIV	406 PARR ROAD	BERNE IN 46711-9506
11532	THICK FILM PRODUCTS GROUP TELEDYNE RELAYS TELEDYNE INDUSTRIES INC	12525 DAPHNE AVE	HAWTHORNE CA 90250-3308
12954	SUB OF TELEDYNE INC MICROSEMI CORP - SCOTTSDALE	8700 E THOMAS RD P O BOX 1390	SCOTTSDALE AZ 85252
12969	UNITRODE CORP	5 FORBES RD	LEXINGTON MA 02173-7305
14193	CAL-R INC	1601 OLYMPIC BLVD PO BOX 1397	SANTA MONICA CA 90406
14433	ITT SEMICONDUCTORS DIV	2830 S FAIRVIEW ST HOUGHTON PK	WEST PALM BEACH FL SANTA ANA CA 92704-5948
14552	MICROSEMI CORP	1710 S DEL MAR AVE	CORNING NY 14830
14674	CORNING GLASS WORKS	600 W JOHN ST	SAN GABRIEL CA 91776-3825
14752	ELECTRO CUBE INC		HICKSVILLE NY 11802
14936	GENERAL INSTRUMENT CORP DISCRETE SEMI CONDUCTOR DIV		
15238	ITT SEMICONDUCTORS A DIVISION OF INTERNATIONAL TELEPHONE AND TELEGRAPH CORP	500 BROADWAY PO BOX 168	LAWRENCE MA 01841-3002
15454	AMETEK INC RODAN DIV	721 N POPLAR ST	ORANGE CA 92668
15636	ELEC-TROL INC	26477 N GOLDEN VALLEY RD	SAUGUS CA 91350-2621

CROSS INDEX - MFR. CODE NUMBER TO MANUFACTURER

Mfr. Code	Manufacturer	Address	City, State, Zip Code
16179	M/A-COM OMNI SPECTRA INC MICROWAVE COMPONENT DIV SUB OF M/A-COM INC	21 CONTINENTAL BLVD	MERRIMACK NH 03054-4303
16299	AVX CORPORATION	3900 ELECTRONICS DR	RALEIGH NC 27604-1620
17540	ALPHA INDUSTRIES INC HQ/SEMICONDUCTOR DIV	20 SYLVAN RD PO BOX 1044	WOBURN MA 01801-1854
18203	ENGELMANN MICROWAVE DIV DIV OF KDI ELECTRONICS INC	60 S JEFFERSON RD	WHIPPANY NJ 07981-1001
18324	SIGNETICS CORP MILITARY PRODUCTS DIV	4130 S MARKET COURT	SACRAMENTO CA 95834-1222
18612	VISHAY INTERTECHNOLOGY INC VISHAY RESISTOR PRODUCTS GROUP	63 LINCOLN HWY	MALVERN PA 19355-2120
19396	ILLINOIS TOOL WORKS INC PAKTRON DIV	1205 MCCONVILLE RD PO BOX 4539	LYNCHBURG VA 24502-4535
19701	MEPCO/CENTRALAB A NORTH AMERICAN PHILIPS CO MINERAL WELLS AIRPORT	PO BOX 760	MINERAL WELLS TX 76067-0760
20932	KYOCERA INTERNATIONAL INC	11620 SORRENTO VALLEY RD PO BOX 81543 PLANT NO 1	SAN DIEGO CA 92121
22526	DU PONT E I DE NEMOURS AND CO INC DU PONT CONNECTOR SYSTEMS DIV MILITARY PRODUCTS GROUP	515 FISHING CREEK RD	NEW CUMBERLAND PA 17070-3007
24022	TELEDYNE MICROWAVE TELEDYNE INC COMPANY	1290 TERRA BELLA AVE	MOUNTAIN VIEW CA 94043-1834
24355	ANALOG DEVICES INC	RT 1 INDUSTRIAL PK PO BOX 9106	NORWOOD MA 02062
24539	AVANTEK INC	3175 BOWERS AVE	SANTA CLARA CA 95051
24546	CORNING GLASS WORKS	550 HIGH ST	BRADFORD PA 16701-3737
24931	SPECIALTY CONNECTOR CO INC	2100 EARLYWOOD DR PO BOX 547	FRANKLIN IN 46131
25088	SIEMENS CORP	186 WOOD AVE S	ISELIN NJ 08830-2704
25403	AMPEREX ELECTRONIC CORP SEMICONDUCTOR SOLID STATE AND ACTIVE DEVICES-ELECTRO OPTICAL DEVICES	GEORGE WASHINGTON HWY	SMITHFIELD RI 02917
26769	MEPCO/CENTRALAB A NORTH AMERICAN PHILIPS CO	5900 AUSTRALIAN AVE	WEST PALM BEACH FL 33407-2330
26805	M/A-COM OMNI SPECTRA INC MICROWAVE CONNECTOR DIV SUB OF M/A-COM INC	140 4TH AVE	WALTHAM MA 02154-7507
27012	MICRO DEVICES CORP SUB OF EMERSON ELECTRIC CO	1320 S MAIN ST PO BOX 3538	MANSFIELD OH 44907-2516
27014	NATIONAL SEMICONDUCTOR CORP	2900 SEMICONDUCTOR DR	SANTA CLARA CA 95051-0606
28480	HEWLETT-PACKARD CO CORPORATE HQ	3000 HANOVER ST	PALO ALTO CA 94304-1112
28733	CERAMIC MAGNETICS INC	87 FAIRFIELD RD	FAIRFIELD NJ 07006-4732
29587	BUNKER RAMO CORP AMPHENOL INDUSTRIAL DIV	1830 S 54TH AVE	CHICAGO IL 60650
31781	EDAC INC	20 RAILSIDE RD	DON MILLS ONT CAN M3A 1A4
32293	INTERSIL INC SUB OF GENERAL ELECTRIC CO	10600 RIDGEVIEW COURT	CUPERTINO CA 95014-0704
32997	BOURNS INC TRIMPOT DIV	1200 COLUMBIA AVE	RIVERSIDE CA 92507-2114
33095	SPECTRUM CONTROL INC	2185 W WEIGHT ST	ERIE PA 16505
33096	COLORADO CRYSTAL CORP	2303 W 8TH ST	LOVELAND CO 80537-5268
34335	ADVANCED MICRO DEVICES	901 THOMPSON PL	SUNNYVALE CA 94086-4518
34371	HARRIS CORP HARRIS SEMICONDUCTOR PRODUCTS GROUP	200 PALM BAY BLVD PO BOX 883	MELBOURNE FL 32919
34630	K AND L/QUARTZTEK INC	3940 W MONTECITO	PHOENIX AZ 85019
34649	INTEL CORP SALES OFFICE /ST4-2/	3065 BOWERS AVE	SANTA CLARA CA 95051
44655	OHMITE MFG CO	3601 W HOWARD ST	SKOKIE IL 60076-4014
50101	FREQUENCY SOURCES INC SEMICONDUCTOR DIV SUB OF LORAL CORP	16 MAPLE RD	CHELMSFORD MA 01824-3737
50140	K AND L MICROWAVE INC SUB OF DOVER CORP	408 COLES CIR	SALISBURY MD 21801-3214

CROSS INDEX - MFR. CODE NUMBER TO MANUFACTURER

Mfr. Code	Manufacturer	Address	City, State, Zip Code
50434	HEWLETT-PACKARD CO OPTOELECTRONICS DIV	370 W TRIMBLE RD	SAN JOSE CA 95131
50438	HEWLETT-PACKARD CO DATA SYSTEMS DIV	11000 WOLFE RD	CUPERTINO CA 95014-0602
50558	ELECTRONIC CONCEPTS INC	526 INDUSTRIAL WAY W	EATONTOWN NJ 07724-2212
50667	DYNATECH MICROWAVE TECHNOLOGY INC DYNATECH MICROWAVE SWITCHES DIV	26655 W AGOURA RD	CLABASAS CA 91302-1921
51640	ANALOG DEVICES INC MICROELECTRONICS DIV	829 WOBURN ST	WILMINGTON MA 01887-3414
51642	CENTRE ENGINEERING INC	2820 E COLLEGE AVE	STATE COLLEGE PA 16801-7515
52648	PLESSEY TRADING CORP PLESSEY OPTOELECTRONICS AND MICROWAVE	1641 KAISER AVE	IRVINE CA 92714-5703
52763	STETCO INC	3344 SCHIERHORN	FRANKLIN PARK IL 60131
52769	SPRAGUE-GOODMAN ELECTRONICS INC	134 FULTON AVE	GARDEN CITY PARK NY 11040-5352
54473	MATSUSHITA ELECTRIC CORP OF AMERICA	ONE PANASONIC WAY PO BOX 1501	SECAUCUS NJ 07094-2917
54583	TDK ELECTRONICS CORP	12 HARBOR PARK DR	PORT WASHINGTON NY 11550
55112	WESTLAKE CAPACITORS INC	5334 STERLING CENTER DRIVE	WESTLAKE VILLAGE CA 91361
55680	NICHICON /AMERICA/ CORP	927 E STATE PKY	SCHAUMBURG IL 60195-4526
56289	SPRAGUE ELECTRIC CO WORLD HEADQUARTERS	92 HAYDEN AVE	LEXINGTON MA 02173-7929
57668	ROHM CORP	8 WHATNEY PO BOX 19515	IRVINE CA 92713
58361	QUALITY TECHNOLOGIES CORP	3400 HILLVIEW AVE	PALO ALTO CA 94304-1319
58854	GTE PRODUCTS CORP LIGHTING PRODUCTS GROUP	60 BOSTON ST	SALEM MA 01970-2147
59492	K AND L QUARTZTEK DIV OF K AND L MICROWAVE INC SUB OF DOVER CORP	20 S 48TH AVE	PHOENIX AZ 85043-3820
59660	TUSONIX INC	7741 N BUSINESS PARK DR PO BOX 37144	TUCSON AZ 85740-7144
59821	MEPCO/CENTRALAB A NORTH AMERICAN PHILIPS CO	7158 MERCHANT AVE	EL PASO TX 79915-1207
71400	BUSSMANN DIV OF COOPER INDUSTRIES INC	114 OLD STATE RD PO BOX 14460	ST LOUIS MO 63178
71468	ITT CANNON DIV OF ITT CORP	666 E DYER RD	SANTA ANA CA 92702
72619	DIALIGHT CORP BROOKLYN DIV	203 HARRISON PL	BROOKLYN NY 11237-1587
72982	ERIE SPECIALTY PRODUCTS INC	645 W 11TH ST	ERIE PA 16512
73138	BECKMAN INDUSTRIAL CORP BECKMAN ELECTRONIC TECHNOLOGIES SUB OF EMERSON ELECTRIC	4141 PALM ST	FULLERTON CA 92635
73899	JFD ELECTRONICS COMPONENTS CORP A DIV OF MURTA ERIE NORTH AMERICA	112 MOTT ST	OCEANSIDE NY 11572-5823
74970	JOHNSON E F CO	299 10TH AVE S W	WASECA MN 56093-2539
75042	IRC ELECTRONIC COMPONENTS PHILADELPHIA DIV	401 N BROAD ST	PHILADELPHIA PA 19108-1001
75378	TRW FIXED RESISTORS		
75378	CTS KNIGHTS INC	400 REIMANN AVE	SANDWICH IL 60548-1846
75915	LITTELFUSE INC SUB TRACOR INC	800 E NORTHWEST HWY	DES PLAINES IL 60016-3049
76493	BELL INDUSTRIES INC JW MILLER DIV	19070 REYES AVE PO BOX 5825	COMPTON CA 90224-5825
80009	TEKTRONIX INC	14150 SW KARL BRAUN DR PO BOX 500	BEAVERTON OR 97077-0001
81073	GRAYHILL INC	561 HILLGROVE AVE PO BOX 10373	LA GRANGE IL 60525-5914
84411	AMERICAN SHIZUKI CORP OGALLALA OPERATIONS	301 WEST O ST	OGALLALA NE 69153-1844
90201	AEROVOX MALLORY	101 MALLORY DR	GLASGOW KY 42141
91506	AUGAT INC	33 PERRY AVE P O BOX 779	ATTLEBORO MA 02703-2417
91637	DALE ELECTRONICS INC	2064 12TH AVE PO BOX 609	COLUMBUS NE 68601-3632

CROSS INDEX - MFR. CODE NUMBER TO MANUFACTURER

Mfr. Code	Manufacturer	Address	City, State, Zip Code
95275	VITRAMON INC	BOX 544	BRIDGEPORT CT 06601-0544
96733	SFE TECHNOLOGIES	1501 FIRST ST	SAN FERNANDO CA 91340-2707
98291	SEAELECTRO CORP BICC ELECTRONICS	40 LINDEMAN DR	TURNBULL CT 06611-4739
98821	NORTH HILLS ELECTRONICS INC	ALXNDR PL	GLEN COVE NY 11542-3704
S0545	NIPPON ELECTRIC CO LTD		TOKYO JAPAN
TK0146	BUEHLER PRODUCTS INC	PO BOX A HIGHWAY 70	EAST KINSTON NC 28501
TK0213	TOPTRON CORP		TOKYO JAPAN
TK0515	ERICSSON COMPONENTS INC	403 INTERNATIONAL PKY PO BOX 853904	RICHARDSON TX 75085-3904
TK0679	DILECTRON INC	2669 S MRYTLE AVE	MONROVIA CA 91016
TK0900	UNITED CHEMI-CON INC	9801 W HIGGINS SUITE 430	ROSEMONT IL 60018-4704
TK0935	MARQUARDT SWITCHES INC	67 ALBANY ST PO BOX 465	CAZENOVIA NY 13035-1219
TK0961	NEC ELECTRONICS USA INC ELECTRON DIV	401 ELLIS ST PO BOX 7241	MOUNTAIN VIEW CA 94039
TK1345	ZMAN AND ASSOCIATES	7633 S 180TH	KENT WA 98032
TK1360	DALE ELECTRONICS INC	462 LIONEL DR	EL PASO TX 79935
TK1375	ESAM	PO BOX 376	GRANTS PASS OR 97526
TK1409	AMERICAN PRECISION INDUSTRIES INC	5455A SE ALEXANDER	HILLSBORO OR 97123
TK1421	COILTRON	PO BOX 904	BEAVERTON OR 97075
TK1424	MARCON AMERICA CORP	3 PEARL CT	ALLENDALE NJ 07401
TK1873	CADIC INC	7874 SW NIMBUS AVE	BEAVERTON OR 97005
TK1881	UNIVERSAL SEMICONDUCTOR INC	1925 ZANKER RD	SAN JOSE CA 95112

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
AT10	119-1007-07			ATTENUATOR,VAR:0-60DB IN 10DB STEPS	50667	ORDER BY DESCR
AT11	015-1053-01			ATTENUATOR,FXD:3DB PAD (OPTION 01 ONLY)	16179	2082-4287-03
AT12	015-1053-01			ATTENUATOR,FXD:3DB PAD (OPTION 01 ONLY)	16179	2082-4287-03
A10	119-1061-00	B010100	B010706	LIMITER ASSY:2GHZ	80009	119-1061-00
A10	119-1061-01	B010707		LIMITER ASSY:2GHZ (OPTION 01 ONLY)	80009	119-1061-01
A11	119-1164-00			BIAS RETURN:	80009	119-1164-00
A12	119-1017-01			FIRST CONV ASSY:	80009	119-1017-01
A12A1	155-0189-02			MICROCKT,LINEAR:DUAL DIODE W/HOUSING	80009	155-0189-02
A13	119-1019-00			POWER DIV ASSY:	80009	119-1019-00
A14	119-1645-00			DIPLEXER ASSY:	80009	119-1645-00
A16	119-0752-02			OSCILLATOR,RF:2.0 TO 6.1 GHZ W/CAN	80009	119-0752-02
A16A1	670-5540-00			CIRCUIT BD ASSY:1ST L O INTERFACE	80009	670-5540-00
A17	015-1053-01			ATTENUATOR,FXD:3DB PAD	16179	2082-4287-03
A18	119-1096-02			SEC CONV ASSY:	80009	119-1096-02
A18A1	-----			CKT BOARD ASSY:2ND CONVERTER (PART OF A18)		
A19	119-1845-01	B010100	B010301	110MHZ IF ASSY:	80009	119-1845-01
A19	119-1845-02	B010302	B010487	110MHZ IF ASSY:	80009	119-1845-02
A19	119-1845-03	B010488		110MHZ IF ASSY: (OPTION 42 ONLY)	80009	119-1845-03
A19A1	670-8650-01	B010100	B010301	CIRCUIT BD ASSY:110MHZ IF OUT	80009	670-8650-01
A19A1	670-8650-02	B010302	B010487	CIRCUIT BD ASSY:110MHZ IF OUT	80009	670-8650-02
A19A1	670-8650-03	B010488		CIRCUIT BD ASSY:110MHZ IF OUT (OPTION 42 ONLY)	80009	670-8650-03
A22	650-0736-01	B010100	B010604	PH LOCK 2ND LO:	80009	650-0736-01
A22	650-0736-02	B010605		PHASE LOCK ASSY:	80009	650-0736-02
A22A1	670-7914-00			CIRCUIT BD ASSY:16-20MHZ PHASELOCK	80009	670-7914-00
A22A2	-----			(PART OF A22)		
A22A2A1	670-7395-01			CIRCUIT BD ASSY:2182MHZ MICRO STRIP OSC	80009	670-7395-01
A22A2A2	670-7076-01			CIRCUIT BD ASSY:2200MHZ REF	80009	670-7076-01
A22A2A3	670-7079-00			CIRCUIT BD ASSY:2200MHZ REFERENCE MIXER	80009	670-7079-00
A23	119-1131-05			SEC CONN ASSY:829MHZ	80009	119-1131-05
A23A1	670-5936-00			CIRCUIT BD ASSY:719MHZ SECOND LO	80009	670-5936-00
A23A2	670-5937-03			CIRCUIT BD ASSY:25MHZ PHASE LOCK	80009	670-5937-03
A23A3	670-6016-00			CIRCUIT BD ASSY:829MHZ HARMONIC MIXER	80009	670-6016-00
A23A4	670-6256-03			CIRCUIT BD ASSY:829MHZ DIPLEXER	80009	670-6256-03
A23A5	670-6255-01			CIRCUIT BD ASSY:829MHZ AMPL	80009	670-6255-01
A23A6	670-6015-01			CIRCUIT BD ASSY:110MHZ IF SELECT	80009	670-6015-01
A23A7	670-6224-00			CIRCUIT BD ASSY:829MHZ,SECOND CONVERTER	80009	670-6224-00
A24	119-1010-02			HYBRID CKT ASSY:PHASE GATE DETECTOR	80009	119-1010-02
A24A1	670-5957-01			CIRCUIT BD ASSY:PHASE GATE INPUT	80009	670-5957-01
A25	119-1640-01			HARMONIC MIXER:	80009	119-1640-01
A25A3	670-4376-01			CIRCUIT BD ASSY:HARMONIC MIXER INPUT	80009	670-4376-01
A26	672-0160-00			CIRCUIT BD ASSY:AUX SYNTHESIZER (NO ELECTRICAL PARTS)	80009	672-0160-00
A26A1	670-9163-00			CIRCUIT BD ASSY:AUX SYNTH	80009	670-9163-00
A28	670-7920-01			CIRCUIT BD ASSY:MAIN MOTHER	80009	670-7920-01
A30	621-0016-00	B010100	B010644	POWER SUPPLY:	80009	621-0016-00
A30	621-0016-01	B010645		POWER SUPPLY: (492A ONLY)	80009	621-0016-01
A30	621-0015-00	B010100	B010644	POWER SUPPLY:	80009	621-0015-00
A30	621-0015-01	B010645		POWER SUPPLY: (492AP ONLY)	80009	621-0015-01
A30	621-0018-00	B010100	B010644	POWER SUPPLY:	80009	621-0018-00
A30	621-0018-01	B010645		POWER SUPPLY: (492A OPTION 42 ONLY)	80009	621-0018-01

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A30	621-0019-00	B010100	B010644	POWER SUPPLY:	80009	621-0019-00
A30	621-0019-01	B010645		POWER SUPPLY:	80009	621-0019-01
				(492AP OPTION 42 ONLY)		
A30	621-0021-00	B010100	B010378	POWER SPLY ASSY:	80009	621-0021-00
				(492A OPTION 30,31 ONLY)		
A30	621-0021-01	B010379		POWER SPLY ASSY:	80009	621-0021-01
				(492A OPTION 30,31 ONLY)		
A30	621-0020-00	B010100	B010378	POWER SPLY ASSY:	80009	621-0020-00
				(492AP OPTION 30,31 ONLY)		
A30	621-0020-01	B010379		POWER SPLY ASSY:	80009	621-0020-01
				(492AP OPTION 30,31 ONLY)		
A30	621-0032-00	B010100	B010378	POWER SPLY ASSY:	80009	621-0032-00
				(492AP OPTION 31,42 ONLY)		
A30	621-0032-01	B010379		POWER SPLY ASSY:	80009	621-0032-01
				(492AP OPTION 31,42 ONLY)		
A30A1	670-8036-01	B010100	B010644	CIRCUIT BD ASSY:PWR SPLY	80009	670-8036-01
A30A1	670-8036-04	B010645		CIRCUIT BD ASSY:PWR SPLY	80009	670-8036-04
A30A2	670-7226-00			CIRCUIT BD ASSY:FAN DRIVE	80009	670-7226-00
A30A2	671-0038-00	B010379		CIRCUIT BD ASSY:RACK MOUNT FAN DRIVER	80009	671-0038-00
				(OPTION 30,31 ONLY)		
A30A57	670-7913-00			CIRCUIT BD ASSY:GPIB INTERFACE	80009	670-7913-00
				(492AP ONLY)		
A30A76	670-5558-02			CIRCUIT BD ASSY:RELAY DRIVER	80009	670-5558-02
A32	119-1015-00	B010100	B010589	FILTER,AMPL:110MHZ	80009	119-1015-00
A32	119-1015-01	B010590		FILTER AMPL:110MHZ	80009	119-1015-01
A32A1	-----			CIRCUIT BD ASSY:110 IF		
				(PART OF A32)		
A34	119-2008-00			OSC/MIXER ASSY:3RD CONVERTER	80009	119-2008-00
A34A1	-----			CIRCUIT BD ASSY:3RD CONVERTER		
				(PART OF A34)		
A34A2	-----			CIRCUIT BD ASSY:100MHZ OSC REGULATOR		
				(PART OF A34)		
A34A3	119-1905-01			RELAY ASSEMBLY:	80009	119-1905-01
				(OPTION 07 ONLY)		
A34A3A1	670-8491-01			CIRCUIT BD ASSY:RELAY	80009	670-8491-01
				(OPTION 07 ONLY)		
A38	670-7947-02	B010100	B010189	CIRCUIT BD ASSY:FRONT PANEL	80009	670-7947-02
A38	670-7947-03	B010190		CIRCUIT BD ASSY:FRONT PNL	80009	670-7947-03
A40	670-8389-01			CIRCUIT BD ASSY:VIDEO PROCESSOR	80009	670-8389-01
A42	672-0166-01			CIRCUIT BD ASSY:PRESELECTOR DRIVER	80009	672-0166-01
				(OPTION 01 ONLY)		
A42A1	670-5552-05			CIRCUIT BD ASSY:PRESELECTOR DRIVER	80009	670-5552-05
				(OPTION 01 ONLY)		
A44	672-0158-00			CIRCUIT BD ASSY:1ST LO DRIVER	80009	672-0158-00
A44A1	670-9051-00			CIRCUIT BD ASSY:1ST LO DRIVER	80009	670-9051-00
A46	672-0165-00			CIRCUIT BD ASSY:CENTER FREQ CONTROL	80009	672-0165-00
A46A1	670-9094-00			CIRCUIT BD ASSY:CENTER FREQ CONT	80009	670-9094-00
A48	672-0157-00			CIRCUIT BD ASSY:SPAN ATTENUATOR	80009	672-0157-00
A48A1	670-5550-01			CIRCUIT BD ASSY:SPAN ATTENUATOR	80009	670-5550-01
A50	119-1992-01	B010100	B010469	CIRCUIT BD ASSY:	80009	119-1992-01
A50	119-1992-02	B010470	B010715	PHASE LOCK ASSY:	80009	119-1992-02
A50	119-1992-03	B010716		PHASE LOCK ASSY:	80009	119-1992-03
A50A1	670-5519-01			CIRCUIT BD ASSY:SYNTHESIZER	80009	670-5519-01
A50A2	670-5520-01	B010100	B010469	CIRCUIT BD ASSY:STROBE DRIVER	80009	670-5520-01
A50A2	670-9068-00	B010470		CIRCUIT BD ASSY:STROBE DRIVER	80009	670-9068-00
A50A3	670-5522-02			CIRCUIT BD ASSY:OFFSET MIXER	80009	670-5522-02
A50A4	670-7921-02	B010100	B010469	CIRCUIT BD ASSY:ERROR AMPL	80009	670-7921-02
A50A4	670-7921-03	B010470		CIRCUIT BD ASSY:ERROR AMPL	80009	670-7921-03
A50A5	670-5524-02	B010100	B010715	CIRCUIT BD ASSY:CONTROLLED OSC	80009	670-5524-02
A50A5	670-5524-03	B010716		CIRCUIT BD ASSY:CONTROLLED OSC	80009	670-5524-03
A51	672-0164-00			CIRCUIT BD ASSY:COUNTER	80009	672-0164-00

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix		Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
	Part No.		Effective	Dscont			
A51A1	670-7899-01				CIRCUIT BD ASSY:COUNTER	80009	670-7899-01
A54	670-8586-01	B010100	B010229		CIRCUIT BD ASSY:MEMORY	80009	670-8586-01
A54	670-8586-02	B010230			CIRCUIT BD ASSY:MEMORY	80009	670-8586-02
A54	670-9599-00				CIRCUIT BD ASSY:MEMORY (OPTION 39 ONLY)	80009	670-9599-00
A56	670-8585-01	B010100	B010229		CIRCUIT BD ASSY:GP1B	80009	670-8585-01
A56	670-8585-02	B010230			CIRCUIT BD ASSY:GRIP	80009	670-8585-02
A56A1	670-7916-01				CIRCUIT BD ASSY:GP1B EXTENDER	80009	670-7916-01
A58	670-8882-00				CIRCUIT BD ASSY:PROCESSOR	80009	670-8882-00
A60	670-9100-01	B010100	B010431		CIRCUIT BD ASSY:DIGITAL STORAGE INTERFACE	80009	670-9100-01
A60	670-9100-02	B010432			CIRCUIT BD ASSY:DIGITAL STORAGE INTERFACE	80009	670-9100-02
A61	672-0163-00	B010100	B010431		CIRCUIT BD ASSY:VERTICAL DIGITAL STORAGE	80009	672-0163-00
A61	672-0163-01	B010432	B010711		CIRCUIT BD ASSY:VERTICAL DIGITAL STORAGE	80009	672-0163-01
A61	672-0163-02	B010712			CIRCUIT BD ASSY:VERTICAL DIGITAL STORAGE	80009	672-0163-02
A61A1	670-9099-00	B010100	B010431		CIRCUIT BD ASSY:DIGITAL STORAGE	80009	670-9099-00
A61A1	670-9099-01	B010432	B010711		CIRCUIT BD ASSY:DIGITAL STORAGE	80009	670-9099-01
A61A1	670-9099-02	B010712			CIRCUIT BD ASSY:DIGITAL STORAGE INTERFACE	80009	670-9099-02
A62	672-1120-00				CIRCUIT BD ASSY:LOG AMP	80009	672-1120-00
A62A1	670-8008-01	B010100	B010266		CIRCUIT BD ASSY:LOG & VIDEO AMP	80009	670-8008-01
A62A1	670-8008-02	B010267			CIRCUIT BD ASSY:LOG AMP	80009	670-8008-02
A64	672-0162-00	B010100	B010139		CIRCUIT BD ASSY:DEFL AMP	80009	672-0162-00
A64	672-0162-01	B010140	B010453		CIRCUIT BD ASSY:DEFL AMP	80009	672-0162-01
A64	672-0162-02	B010454	B010701		CIRCUIT BD ASSY:DEFL AMP	80009	672-0162-02
A64	672-0162-03	B010702	B010706		CIRCUIT BD ASSY:DEFLECTION AMP	80009	672-0162-03
A64	672-0162-04	B010707			CIRCUIT BD ASSY:DEFLECTION AMP	80009	672-0162-04
A64A1	670-8083-00	B010100	B010139		CIRCUIT BD ASSY:DEFL AMP	80009	670-8083-00
A64A1	670-8083-01	B010140	B010453		CIRCUIT BD ASSY:DEFLECTION AMP	80009	670-8083-01
A64A1	670-8083-02	B010454	B010701		CIRCUIT BD ASSY:DEFL AMP	80009	670-8083-02
A64A1	671-0372-00	B010702	B010706		CIRCUIT BD ASSY:DEFLECTION AMP	80009	671-0372-00
A64A1	671-0372-01	B010707			CIRCUIT BD ASSY:DEFLECTION AMP	80009	671-0372-01
A66	672-0159-00				CIRCUIT BD ASSY:CRT READOUT	80009	672-0159-00
A66A1	670-7902-00				CIRCUIT BD ASSY:CRT READOUT	80009	670-7902-00
A68	644-0565-00	B010100	B010228		VR MODULE ASSY:	80009	644-0565-00
A68	644-0565-01	B010229	B010336		VR MODULE ASSY:	80009	644-0565-01
A68	644-0565-02	B010337	B010700		VAR RESOLN MDL:	80009	644-0565-02
A68	644-0565-03	B010701			VAR RESOLN MDL:495/P	80009	644-0565-03
A68	644-0634-00	B010100	B010228		VAR RESOLN MDL:	80009	644-0634-00
A68	644-0634-01	B010229	B010336		VAR RESOLN MDL:	80009	644-0634-01
A68	644-0634-02	B010337	B010700		VAR RESOLN MDL:	80009	644-0634-02
A68	644-0634-03	B010701			VAR RESOLN MDL:2755/P (OPTION 07 ONLY)	80009	644-0634-03
A68A1	670-5528-03				CIRCUIT BD ASSY:#1VR MOTHER	80009	670-5528-03
A68A2	670-5536-04	B010100	B010700		CIRCUIT BD ASSY:#2 V.R. MOTHER	80009	670-5536-04
A68A2	670-5536-05	B010701			CIRCUIT BD ASSY:#2 V.R. MOTHER	80009	670-5536-05
A68A3	670-9160-00				CIRCUIT BD ASSY:VR INPUT	80009	670-9160-00
A68A4	670-8573-00	B010100	B010336		CIRCUIT BD ASSY:1ST FILTER SELECT	80009	670-8573-00
A68A4	670-8573-01	B010337			CIRCUIT BD ASSY:1ST FILTER SELECT	80009	670-8573-01
A68A4	670-9597-00	B010100	B010336		CIRCUIT BD ASSY:1ST FILTER SELECT	80009	670-9597-00
A68A4	670-9597-01	B010337			CIRCUIT BD ASSY:1ST FILTER SELECT (OPTION 07 ONLY)	80009	670-9597-01
A68A5	670-8321-00				CIRCUIT BD ASSY:10DB GAIN STEPS	80009	670-8321-00
A68A6	670-5532-03				CIRCUIT BD ASSY:20DB GAIN STEPS	80009	670-5532-03
A68A7	670-5533-03				CIRCUIT BD ASSY:BAND LEVELING	80009	670-5533-03
A68A8	670-8574-00	B010100	B010228		CIRCUIT BD ASSY:2ND FILTER SELECT	80009	670-8574-00
A68A8	670-8574-01	B010229			CIRCUIT BD ASSY:2ND FILTER SELECT	80009	670-8574-01
A68A8	670-9598-00	B010100	B010228		CIRCUIT BD ASSY:2 ND FILTER SELECT (OPTION 07 ONLY)	80009	670-9598-00
A68A8	670-9598-01	B010229			CIRCUIT BD ASSY:2ND FILTER SELECT (OPTION 07 ONLY)	80009	670-9598-01
A68A9	670-9161-00				CIRCUIT BD ASSY:POST VR AMP	80009	670-9161-00



Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A70	670-7919-03	B010100	B010662	CIRCUIT BD ASSY:Z-AXIS	80009	670-7919-03
A70	670-7919-04	B010663		CIRCUIT BD ASSY:Z-AXIS	80009	670-7919-04
A72	670-9090-01	B010100	B010200	CIRCUIT BD ASSY:SWEEP	80009	670-9090-01
A72	670-9090-02	B010201	B010389	CIRCUIT BD ASSY:SWEEP	80009	670-9090-02
A72	670-9090-03	B010390	B010482	CIRCUIT BD ASSY:SWEEP	80009	670-9090-03
A72	670-9090-04	B010483		CIRCUIT BD ASSY:SWEEP	80009	670-9090-04
A74	670-5559-04	B010100	B010259	CIRCUIT BD ASSY:HIG VOLTAGE	80009	670-5559-04
A74	670-5559-06	B010260	B010584	CIRCUIT BD ASSY:HIG VOLTAGE	80009	670-5559-06
A74	670-5559-07	B010585		CIRCUIT BD ASSY:HIG VOLTAGE	80009	670-5559-07
A74A1	119-1159-01			CIRCUIT BD ASSY:HIG VOLTAGE	80009	119-1159-01
A74A1	-----			(PART OF A74)		
A77	670-5746-01			CIRCUIT BD ASSY:CRT GRATICULE LIGHT	80009	670-5746-01
AT10	119-1007-07			ATTENUATOR,VAR:0-60DB IN 10DB STEPS	50667	ORDER BY DESCR
AT11	015-1053-00			ATTENUATOR,FXD:3DB	26805	2082-4182-03
AT10	119-1007-07			ATTENUATOR,VAR:0-60DB IN 10DB STEPS	50667	ORDER BY DESCR
AT11	015-1053-01			ATTENUATOR,FXD:3DB PAD (OPTION 01 ONLY)	16179	2082-4287-03
AT12	015-1053-01			ATTENUATOR,FXD:3DB PAD (OPTION 01 ONLY)	16179	2082-4287-03
A10	119-1061-00	B010100	B010706	LIMITER ASSY:2GHZ	80009	119-1061-00
A10	119-1061-01	B010707		LIMITER ASSY:2GHZ (OPTION 01 ONLY)	80009	119-1061-01
A11	119-1164-00			BIAS RETURN:	80009	119-1164-00
A12	119-1017-01			FIRST CONV ASSY:	80009	119-1017-01
A12A1	155-0189-02			MICROCKT,LINER:DUAL DIODE W/HOUSING	80009	155-0189-02
A13	119-1019-00			POWER DIV ASSY:	80009	119-1019-00
A14	119-1645-00			DIPLEXER ASSY:	80009	119-1645-00
A16	119-0752-02			OSCILLATOR,RF:2.0 TO 6.1 GHZ W/CAN	80009	119-0752-02
A16C1013	290-0778-00			CAP,FXD,ELCTL:1UF,20%,50V,NPLZD	54473	ECE-A50N1
A16A1	670-5540-00			CIRCUIT BD ASSY:1ST L O INTERFACE	80009	670-5540-00
A16A1C1012	290-0326-02			CAP,FXD,ELCTL:820UF,10%,6V	56289	109D827X9006F2
A16A1C1014	290-0326-02			CAP,FXD,ELCTL:820UF,10%,6V	56289	109D827X9006F2
A16A1C1016	290-0529-00			CAP,FXD,ELCTL:47UF,20%,20V	05397	T362C476M020AS
A16A1K1015	148-0076-00			RLY,REED:FRM A,250MA,100V,COIL,5V,500 OHM	15636	R4060-1
A16A1L1011	108-0205-00			COIL,RF:FIXED,1MH	76493	8209
A16A1VR1010	152-0590-00			SEMICONV DVC,DI:ZEN,SI,18V,5%,400MW	80009	152-0590-00
A16A1VR1018	152-0304-00			SEMICONV DVC,DI:ZEN,SI,20V,5%,0.4W,DO-7	15238	Z5411
A16A1VR1019	152-0304-00			SEMICONV DVC,DI:ZEN,SI,20V,5%,0.4W,DO-7	15238	Z5411
A17	015-1053-01			ATTENUATOR,FXD:3DB PAD	16179	2082-4287-03
A18	119-1096-02			SEC CONV ASSY:	80009	119-1096-02
A18W140	175-2199-02			CABLE ASSY,RF:50 OHM COAX,13.04 L	80009	175-2199-02
A18W222	175-3849-01			CABLE ASSY,RF:50 OHM COAX,4.85 L	80009	175-3849-01
A18A1	-----			CKT BOARD ASSY:2ND CONVERTER (PART OF A18)		
A19	119-1845-01	B010100	B010301	110MHZ IF ASSY:	80009	119-1845-01
A19	119-1845-02	B010302	B010487	110MHZ IF ASSY:	80009	119-1845-02
A19	119-1845-03	B010488		110MHZ IF ASSY: (OPTION 42 ONLY)	80009	119-1845-03
A19C190	281-0825-00			CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A19A1	670-8650-01	B010100	B010301	CIRCUIT BD ASSY:110MHZ IF OUT	80009	670-8650-01
A19A1	670-8650-02	B010302	B010487	CIRCUIT BD ASSY:110MHZ IF OUT	80009	670-8650-02
A19A1	670-8650-03	B010488		CIRCUIT BD ASSY:110MHZ IF OUT (OPTION 42 ONLY)	80009	670-8650-03
A19A1C10	283-5008-00			CAP,FXD,CER DI:12PF,5%,50V	54583	C3216C0G1H120J
A19A1C12	283-5009-00			CAP,FXD,CER DI:15PF,5%,50V	54583	C3216C0G1H150J
A19A1C14	281-0267-00			CAP,VAR,PLASTIC:6-50PF,50V	80009	281-0267-00
A19A1C16	283-5005-00			CAP,FXD,CER DI:4PF,+/- 0.25PF,50V	54583	C3216C0G1H040C
A19A1C18	283-5009-00			CAP,FXD,CER DI:15PF,5%,50V	54583	C3216C0G1H150J

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A19A1C20	281-0267-00			CAP,VAR,PLASTIC:6-50PF,50V	80009	281-0267-00
A19A1C22	283-5006-00			CAP,FXD,CER DI:5PF,+/- 0.25PF,50V	54583	C3216C0G1H050C
A19A1C24	283-5009-00			CAP,FXD,CER DI:15PF,5%,50V	54583	C3216C0G1H150J
A19A1C26	281-0267-00			CAP,VAR,PLASTIC:6-50PF,50V	80009	281-0267-00
A19A1C28	283-5007-00			CAP,FXD,CER DI:8PF,+/- 0.5PF,50V	80009	283-5007-00
A19A1L10	108-0606-00			COIL,RF:FIXED,31NH	80009	108-0606-00
A19A1L11	108-0262-00	B010488		COIL,RF:FIXED,505NH	80009	108-0262-00
A19A1L12	108-0606-00			COIL,RF:FIXED,31NH	80009	108-0606-00
A19A1L14	108-0606-00			COIL,RF:FIXED,31NH	80009	108-0606-00
A19A1R10	321-5043-00			RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A19A1R12	321-5008-00	B010100	B010301	RES,FXD,FILM:150 OHM,1%,0.125W	01121	BCK1500FT
A19A1R12	321-5006-00	B010302	B010487	RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A19A1R12	321-5046-00	B010488		RES,FXD,FILM:82.5 OHM,1%,0.125W	01121	BCK82R5FT
A19A1R14	321-5042-00	B010100	B010301	RES,FXD,FILM:39.2 OHM,1%,0.125W	57668	MCR18FWEA39E2
A19A1R14	321-5045-00	B010302	B010487	RES,FXD,FILM:68.1 OHM,1%,0.125W	01121	BCD68R1FT
A19A1R14	321-5046-00	B010488		RES,FXD,FILM:82.5 OHM,1%,0.125W	01121	BCK82R5FT
A19A1R16	321-5008-00	B010100	B010301	RES,FXD,FILM:150 OHM,1%,0.125W	01121	BCK1500FT
A19A1R16	321-5006-00	B010302	B010487	RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A19A1R16	321-5046-00	B010488		RES,FXD,FILM:82.5 OHM,1%,0.125W	01121	BCK82R5FT
A19A1R18	315-0391-00			RES,FXD,FILM:390 OHM,5%,0.25W	57668	NTR25J-E390E
A19A1T10	120-1567-00			XFMR,COUPLER:BALUN	TK1421	ORDER BY DESCR
A19A1T11	120-1760-00	B010488		TRANSFORMER,RF:BIFILAR,2 TURN	80009	120-1760-00
A19A1T12	120-1567-00			XFMR,COUPLER:BALUN	TK1421	ORDER BY DESCR
A19A1T13	120-1760-00	B010488		TRANSFORMER,RF:BIFILAR,2 TURN	80009	120-1760-00
A19A1T15	120-1760-00	B010488		TRANSFORMER,RF:BIFILAR,2 TURN	80009	120-1760-00
A19A1U10	156-2247-00			MICROCKT,LINER:GENERAL PURPOSE AMP MODULE	24539	GPD-1003A
A19A1U12	156-2208-00			MICROCKT,LINER:4 PIN HEADER AMPL	24539	GPD-252A
A19A1U14	156-2208-00			MICROCKT,LINER:4 PIN HEADER AMPL	24539	GPD-252A
A22	650-0736-01	B010100	B010604	PH LOCK 2ND LO:	80009	650-0736-01
A22	650-0736-02	B010605		PHASE LOCK ASSY:	80009	650-0736-02
A22C220	281-0720-00			CAP,FXD,CER DI:1750PF,+80-20%,250V	33095	51-707-002
A22C221	281-0720-00			CAP,FXD,CER DI:1750PF,+80-20%,250V	33095	51-707-002
A22C222	281-0720-00			CAP,FXD,CER DI:1750PF,+80-20%,250V	33095	51-707-002
A22C223	281-0720-00			CAP,FXD,CER DI:1750PF,+80-20%,250V	33095	51-707-002
A22C224	281-0720-00			CAP,FXD,CER DI:1750PF,+80-20%,250V	33095	51-707-002
A22C226	281-0720-00			CAP,FXD,CER DI:1750PF,+80-20%,250V	33095	51-707-002
A22C227	281-0720-00			CAP,FXD,CER DI:1750PF,+80-20%,250V	33095	51-707-002
A22L1060	108-0182-00	B010605		COIL,RF:FIXED,293NH	80009	108-0182-00
A22R224	321-0189-00			RES,FXD,FILM:909 OHM,1%,0.125W,TC=TO	19701	5033ED909R0F
A22W1048	175-8791-00			CA ASSY,SP,ELEC:8.26 AWG,7.5 L,RIBBON	TK1375	175-8791-00
A22A1	670-7914-00			CIRCUIT BD ASSY:16-20MHZ PHASELOCK	80009	670-7914-00
A22A1C1012	290-0517-00			CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ
A22A1C1017	283-0201-00			CAP,FXD,CER DI:27PF,10%,200V	04222	SR152C270KAA
A22A1C1019	290-0517-00			CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ
A22A1C1026	283-0051-00			CAP,FXD,CER DI:0.0033UF,5%,100V	04222	SR301A332JAA
A22A1C1027	290-0517-00			CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ
A22A1C1028	283-0108-00			CAP,FXD,CER DI:220PF,10%,200V	04222	SR152A221KAA
A22A1C1029	283-0051-00			CAP,FXD,CER DI:0.0033UF,5%,100V	04222	SR301A332JAA
A22A1C1031	283-0108-00			CAP,FXD,CER DI:220PF,10%,200V	04222	SR152A221KAA
A22A1C1033	290-0517-00			CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ
A22A1C1034	290-0517-00			CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ
A22A1C1038	283-0339-00			CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA
A22A1C1044	283-0339-00			CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA
A22A1C1046	283-0108-00			CAP,FXD,CER DI:220PF,10%,200V	04222	SR152A221KAA
A22A1C1047	283-0339-00			CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA
A22A1C1073	290-0517-00			CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ
A22A1C1079	290-0517-00			CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ
A22A1C1086	283-0339-00			CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA

Component No.	Tektronix	Serial/Assembly No.		Name & Description	Mfr.	Mfr. Part No.
	Part No.	Effective	Dscont		Code	
A22A1C1087	283-0339-00			CAP, FXD, CER DI: 0.22UF, 10%, 50V	04222	SR305C224KAA
A22A1C1088	283-0339-00			CAP, FXD, CER DI: 0.22UF, 10%, 50V	04222	SR305C224KAA
A22A1C2011	290-0517-00			CAP, FXD, ELCTLT: 6.8UF, 20%, 35V	05397	T368B685M035AZ
A22A1C2012	283-0339-00			CAP, FXD, CER DI: 0.22UF, 10%, 50V	04222	SR305C224KAA
A22A1C2015	290-0512-00			CAP, FXD, ELCTLT: 22UF, 20%, 15V	05397	T368B226M015AS
A22A1C2016	283-0326-00			CAP, FXD, CER DI: 0.082UF, 10%, 50V	04222	SR205C823KAA
A22A1C2019	290-0517-00			CAP, FXD, ELCTLT: 6.8UF, 20%, 35V	05397	T368B685M035AZ
A22A1C2026	283-0239-00			CAP, FXD, CER DI: 0.022UF, 10%, 50V	04222	3439-050C-223K
A22A1C2030	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A22A1C2040	283-0330-00			CAP, FXD, CER DI: 100PF, 5%, 50V	05397	C320C101J5R5CA
A22A1C2041	283-0239-00			CAP, FXD, CER DI: 0.022UF, 10%, 50V	04222	3439-050C-223K
A22A1C2043	283-0330-00			CAP, FXD, CER DI: 100PF, 5%, 50V	05397	C320C101J5R5CA
A22A1C2046	283-0024-00			CAP, FXD, CER DI: 0.1UF, +80-20%, 50V	04222	SR215C104MAA
A22A1C2077	290-0517-00			CAP, FXD, ELCTLT: 6.8UF, 20%, 35V	05397	T368B685M035AZ
A22A1C2081	290-0517-00			CAP, FXD, ELCTLT: 6.8UF, 20%, 35V	05397	T368B685M035AZ
A22A1C2085	283-0107-00			CAP, FXD, CER DI: 51PF, 5%, 200V	04222	SR206A510JAA
A22A1C2090	283-0175-00			CAP, FXD, CER DI: 10PF, 5%, 200V	05397	C312C100D2G5CA 8
A22A1C2091	283-0197-00			CAP, FXD, CER DI: 470PF, 5%, 50V	04222	SR205A471JAA
A22A1C2092	283-0339-00			CAP, FXD, CER DI: 0.22UF, 10%, 50V	04222	SR305C224KAA
A22A1CR1019	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A22A1CR1086	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A22A1CR1087	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A22A1CR1088	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A22A1CR1089	152-0719-00			SEMICON DVC, DI: VVC, SI, 100 PF, 5%, 30V, DO-7	04713	SMV1501
A22A1CR2012	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A22A1CR2014	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A22A1CR2015	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A22A1CR2019	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A22A1CR2048	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A22A1CR2084	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A22A1L1012	120-0407-00			XFMR, TOROID:	80009	120-0407-00
A22A1L1022	108-0440-00			COIL, RF: FIXED, 8UH	80009	108-0440-00
A22A1L1097	108-0440-00			COIL, RF: FIXED, 8UH	80009	108-0440-00
A22A1L2027	120-0407-00			XFMR, TOROID:	80009	120-0407-00
A22A1L2038	120-0407-00			XFMR, TOROID:	80009	120-0407-00
A22A1Q1012	151-0103-00			TRANSISTOR: NPN, SI, TO-5	80009	151-0103-00
A22A1Q1023	151-0103-00			TRANSISTOR: NPN, SI, TO-5	80009	151-0103-00
A22A1Q1041	151-0441-00			TRANSISTOR: NPN, SI, TO-72	04713	SRF501
A22A1Q1042	151-0441-00			TRANSISTOR: NPN, SI, TO-72	04713	SRF501
A22A1Q1043	151-0441-00			TRANSISTOR: NPN, SI, TO-72	04713	SRF501
A22A1Q1047	151-0301-00			TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A22A1Q2024	151-0301-00			TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A22A1Q2076	151-0301-00			TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A22A1Q2084	151-1022-00			TRANSISTOR: FET, N-CHAN, SI, TO-18	80009	151-1022-00
A22A1Q2087	151-0441-00			TRANSISTOR: NPN, SI, TO-72	04713	SRF501
A22A1Q2096	151-0441-00			TRANSISTOR: NPN, SI, TO-72	04713	SRF501
A22A1R1010	315-0750-00			RES, FXD, FILM: 75 OHM, 5%, 0.25W	57668	NTR25J-E75E0
A22A1R1011	315-0471-00			RES, FXD, FILM: 470 OHM, 5%, 0.25W	57668	NTR25J-E470E
A22A1R1013	315-0101-00			RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A22A1R1014	315-0100-00			RES, FXD, FILM: 10 OHM, 5%, 0.25W	19701	5043CX10R00J
A22A1R1015	321-0297-00			RES, FXD, FILM: 12.1K OHM, 1%, 0.125W, TC=TO	07716	CEAD12101F
A22A1R1016	321-0262-00			RES, FXD, FILM: 5.23K OHM, 1%, 0.125W, TC=TO	19701	5033ED5K230F
A22A1R1018	315-0101-00			RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A22A1R1019	315-0470-00			RES, FXD, FILM: 47 OHM, 5%, 0.25W	57668	NTR25J-E470E
A22A1R1023	315-0200-00			RES, FXD, FILM: 20 OHM, 5%, 0.25W	19701	5043CX20R00J
A22A1R1024	315-0390-00			RES, FXD, FILM: 39 OHM, 5%, 0.25W	57668	NTR25J-E39E0
A22A1R1025	315-0101-00			RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A22A1R1026	315-0302-00			RES, FXD, FILM: 3K OHM, 5%, 0.25W	57668	NTR25J-E03K0

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix		Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
	Part No.	Effective	Discont				
A22A1R1027	315-0302-00				RES, FXD, FILM:3K OHM, 5%, 0.25W	57668	NTR25J-E03K0
A22A1R1028	315-0102-00				RES, FXD, FILM:1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A22A1R1029	315-0101-00				RES, FXD, FILM:100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A22A1R1031	315-0102-00				RES, FXD, FILM:1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A22A1R1033	321-0821-00				RES, FXD, FILM:2.12K OHM, 1%, 0.125W, TC=TO	19701	5033RD2K120F
A22A1R1034	321-0217-00				RES, FXD, FILM:1.78K OHM, 1%, 0.125W, TC=TO	19701	5043D1K780F
A22A1R1035	315-0101-00				RES, FXD, FILM:100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A22A1R1037	317-0200-00				RES, FXD, CMPSN:20 OHM, 5%, 0.125W	01121	BB2005
A22A1R1038	317-0161-00				RES, FXD, CMPSN:160 OHM, 5%, 0.125W	01121	BB1615
A22A1R1039	317-0161-00				RES, FXD, CMPSN:160 OHM, 5%, 0.125W	01121	BB1615
A22A1R1040	315-0111-00				RES, FXD, CMPSN:510 OHM, 5%, 0.125W	01121	BB5115
A22A1R1042	317-0391-00				RES, FXD, CMPSN:390 OHM, 5%, 0.125W	01121	BB3915
A22A1R1043	317-0111-00				RES, FXD, CMPSN:110 OHM, 5%, 0.125W	01121	BB1115
A22A1R1046	317-0820-00				RES, FXD, CMPSN:82 OHM, 5%, 0.125W	01121	BB8205
A22A1R1048	317-0680-00				RES, FXD, CMPSN:68 OHM, 5%, 0.125W	01121	BB6805
A22A1R1051	321-0294-00				RES, FXD, FILM:11.3K OHM, 1%, 0.125W, TC=TO	19701	5043ED11K30F
A22A1R1052	321-0319-00				RES, FXD, FILM:20.5K OHM, 1%, 0.125W, TC=TO	19701	5033ED20K50F
A22A1R1053	321-0340-00				RES, FXD, FILM:34.0K OHM, 1%, 0.125W, TC=TO	19701	5043ED34K00F
A22A1R1054	321-0361-00				RES, FXD, FILM:56.2K OHM, 1%, 0.125W, TC=TO	07716	CEAD56201F
A22A1R1055	321-0387-00				RES, FXD, FILM:105K OHM, 1%, 0.125W, TC=TO	07716	CEAD10502F
A22A1R1056	321-0437-00				RES, FXD, FILM:348K OHM, 1%, 0.125W, TC=TO	19701	5043ED348K0F
A22A1R1060	321-0437-00				RES, FXD, FILM:348K OHM, 1%, 0.125W, TC=TO	19701	5043ED348K0F
A22A1R1061	321-0391-00				RES, FXD, FILM:115K OHM, 1%, 0.125W, TC=TO	07716	CEAD11502F
A22A1R1062	321-0368-00				RES, FXD, FILM:66.5K OHM, 1%, 0.125W, TC=TO	07716	CEAD66501F
A22A1R1063	321-0353-00				RES, FXD, FILM:46.4K OHM, 1%, 0.125W, TC=TO	07716	CEAD46401F
A22A1R1064	321-0341-00				RES, FXD, FILM:34.8K OHM, 1%, 0.125W, TC=TO	19701	5043ED34K80F
A22A1R1065	321-0331-00				RES, FXD, FILM:27.4K OHM, 1%, 0.125W, TC=TO	19701	5043ED27K40F
A22A1R1070	321-0268-00				RES, FXD, FILM:6.04K OHM, 1%, 0.125W, TC=TO	19701	5043ED6K040F
A22A1R1072	321-0222-00				RES, FXD, FILM:2.00K OHM, 1%, 0.125W, TC=TO	19701	5033ED2K00F
A22A1R1073	315-0470-00				RES, FXD, FILM:47 OHM, 5%, 0.25W	57668	NTR25J-E47E0
A22A1R1074	321-0201-00				RES, FXD, FILM:1.21K OHM, 1%, 0.125W, TC=TO	19701	5043ED1K210F
A22A1R1076	321-0302-00				RES, FXD, FILM:13.7K OHM, 1%, 0.125W, TC=TO	07716	CEAD 13701F
A22A1R1079	321-0289-00				RES, FXD, FILM:10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A22A1R1080	315-0471-00				RES, FXD, FILM:470 OHM, 5%, 0.25W	57668	NTR25J-E470E
A22A1R1081	315-0470-00				RES, FXD, FILM:47 OHM, 5%, 0.25W	57668	NTR25J-E47E0
A22A1R1082	321-0335-00				RES, FXD, FILM:30.1K OHM, 1%, 0.125W, TC=TO	57668	RB14FXE30K1
A22A1R1083	315-0432-00				RES, FXD, FILM:4.3K OHM, 5%, 0.25W	57668	NTR25J-E04K3
A22A1R1086	315-0471-00				RES, FXD, FILM:470 OHM, 5%, 0.25W	57668	NTR25J-E470E
A22A1R1097	315-0390-00				RES, FXD, FILM:39 OHM, 5%, 0.25W	57668	NTR25J-E39E0
A22A1R2010	321-1296-07				RES, FXD, FILM:12.0K OHM, 0.1%, 0.125W, TC=T9	19701	5033RE12K00B
A22A1R2011	321-1296-07				RES, FXD, FILM:12.0K OHM, 0.1%, 0.125W, TC=T9	19701	5033RE12K00B
A22A1R2012	315-0470-00				RES, FXD, FILM:47 OHM, 5%, 0.25W	57668	NTR25J-E47E0
A22A1R2013	315-0103-00				RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A22A1R2014	315-0332-00				RES, FXD, FILM:3.3K OHM, 5%, 0.25W	57668	NTR25J-E03K0
A22A1R2015	315-0102-00				RES, FXD, FILM:1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A22A1R2016	321-0264-07				RES, FXD, FILM:5.49K OHM, 0.1%, 0.125W, TC=T9	07716	CEAE54900B
A22A1R2017	321-1617-06				RES, FXD, FILM:5.85K OHM, 0.25%, 0.125W, TC=T9	07716	CEAE58500C
A22A1R2018	315-0302-00				RES, FXD, FILM:3K OHM, 5%, 0.25W	57668	NTR25J-E03K0
A22A1R2019	315-0751-00				RES, FXD, FILM:750 OHM, 5%, 0.25W	57668	NTR25J-E750E
A22A1R2020	315-0152-00				RES, FXD, FILM:1.5K OHM, 5%, 0.25W	57668	NTR25J-E01K5
A22A1R2025	315-0240-00				RES, FXD, FILM:24 OHM, 5%, 0.25W	57668	NTR25J-E24E0
A22A1R2026	315-0270-00				RES, FXD, FILM:27 OHM, 5%, 0.25W	19701	5043CX27R00J
A22A1R2027	315-0102-00				RES, FXD, FILM:1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A22A1R2028	315-0152-00				RES, FXD, FILM:1.5K OHM, 5%, 0.25W	57668	NTR25J-E01K5
A22A1R2030	315-0102-00				RES, FXD, FILM:1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A22A1R2031	315-0152-00				RES, FXD, FILM:1.5K OHM, 5%, 0.25W	57668	NTR25J-E01K5
A22A1R2032	315-0131-00				RES, FXD, FILM:130 OHM, 5%, 0.25W	19701	5043CX130R0J
A22A1R2033	315-0102-00				RES, FXD, FILM:1K OHM, 5%, 0.25W	57668	NTR25JE01K0

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A22A1R2034	315-0911-00		RES,FXD,FILM:910 OHM,5%,0.25W	57668	NTR25J-E910E
A22A1R2035	315-0152-00		RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A22A1R2037	315-0152-00		RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A22A1R2039	315-0270-00		RES,FXD,FILM:27 OHM,5%,0.25W	19701	5043CX27R00J
A22A1R2041	315-0161-00		RES,FXD,FILM:160 OHM,5%,0.25W	57668	NTR25J-E 160E
A22A1R2042	315-0391-00		RES,FXD,FILM:390 OHM,5%,0.25W	57668	NTR25J-E390E
A22A1R2044	315-0161-00		RES,FXD,FILM:160 OHM,5%,0.25W	57668	NTR25J-E 160E
A22A1R2045	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A22A1R2046	321-0205-00		RES,FXD,FILM:1.33K OHM,1%,0.125W,TC=TO	19701	5033ED1K330F
A22A1R2049	321-0268-00		RES,FXD,FILM:6.04K OHM,1%,0.125W,TC=TO	19701	5043ED6K040F
A22A1R2051	321-0329-00		RES,FXD,FILM:26.1K OHM,1%,0.125W,TC=TO	19701	5043ED26K10F
A22A1R2052	321-0326-00		RES,FXD,FILM:24.3K OHM,1%,0.125W,TC=TO	19701	5043ED24K30F
A22A1R2053	321-0323-00		RES,FXD,FILM:22.6K OHM,1%,0.125W,TC=TO	07716	CEAD22601F
A22A1R2054	321-0319-00		RES,FXD,FILM:20.5K OHM,1%,0.125W,TC=TO	19701	5033ED20K50F
A22A1R2055	321-0316-00		RES,FXD,FILM:19.1K OHM,1%,0.125W,TC=TO	07716	CEAD19101F
A22A1R2056	321-0313-00		RES,FXD,FILM:17.8K OHM,1%,0.125W,TC=TO	07716	CEAD17801F
A22A1R2060	321-0309-00		RES,FXD,FILM:16.2K OHM,1%,0.125W,TC=TO	19701	5033ED16K20F
A22A1R2061	321-0306-00		RES,FXD,FILM:15.0K OHM,1%,0.125W,TC=TO	19701	5033ED15J00F
A22A1R2062	321-0303-00		RES,FXD,FILM:14.0K OHM,1%,0.125W,TC=TO	07716	CEAD 14001F
A22A1R2063	321-0299-00		RES,FXD,FILM:12.7K OHM,1%,0.125W,TC=TO	19701	5033ED12K70F
A22A1R2064	321-0296-00		RES,FXD,FILM:11.8K OHM,1%,0.125W,TC=TO	07716	CEAD11801F
A22A1R2065	321-0293-00		RES,FXD,FILM:11.0K OHM,1%,0.125W,TC=TO	07716	CEAD11001F
A22A1R2066	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A22A1R2067	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A22A1R2068	321-0285-09		RES,FXD,FILM:9.09K OHM,1%,0.125W,TC=T9	19701	5033RE9K090F
A22A1R2070	321-0268-00		RES,FXD,FILM:6.04K OHM,1%,0.125W,TC=TO	19701	5043ED6K040F
A22A1R2071	321-0268-00		RES,FXD,FILM:6.04K OHM,1%,0.125W,TC=TO	19701	5043ED6K040F
A22A1R2072	321-0249-00		RES,FXD,FILM:3.83K OHM,1%,0.125W,TC=TO	19701	5033ED3K83F
A22A1R2073	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A22A1R2074	315-0562-00		RES,FXD,FILM:5.6K OHM,5%,0.25W	57668	NTR25J-E05K6
A22A1R2075	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A22A1R2077	321-0286-00		RES,FXD,FILM:9.31K OHM,1%,0.125W,TC=TO	19701	5043ED9K310F
A22A1R2080	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A22A1R2082	321-0229-00		RES,FXD,FILM:2.37K OHM,1%,0.125W,TC=TO	19701	5043ED2K37F
A22A1R2083	321-0321-00		RES,FXD,FILM:21.5K OHM,1%,0.125W,TC=TO	07716	CEAD21501F
A22A1R2084	315-0202-00		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A22A1R2085	315-0105-00		RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A22A1R2086	315-0473-00		RES,FXD,FILM:47K OHM,5%,0.25W	57668	NTR25J-E47K0
A22A1R2087	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A22A1R2088	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A22A1R2089	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A22A1R2090	321-0272-00		RES,FXD,FILM:6.65K OHM,1%,0.125W,TC=TO	19701	5043ED6K650F
A22A1R2092	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A22A1R2093	321-0272-00		RES,FXD,FILM:6.65K OHM,1%,0.125W,TC=TO	19701	5043ED6K650F
A22A1R2097	321-0114-00		RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150R0F
A22A1T1091	120-1386-00		TRANSFORMER,RF:TOROID	80009	120-1386-00
A22A1T2092	120-1392-00		TRANSFORMER,RF:TOROID	80009	120-1392-00
A22A1U1017	156-0105-04		MICROCKT,LINER:OPNL AMPL,SCREENED	01295	LM301AJG4
A22A1U1031	156-1338-02		MICROCKT,LINER:OPERATIONAL AMPLIFIER,SCRN	01295	NE5534P3
A22A1U1059	156-1545-00		MICROCKT,LINER:DIODE ARRAY 7 ISOL DIODES	07263	FSA2720M
A22A1U1073	156-1272-00		MICROCKT,LINER:DUAL OPERATIONAL AMPLIFIER	80009	156-1272-00
A22A1U2016	156-1272-00		MICROCKT,LINER:DUAL OPERATIONAL AMPLIFIER	80009	156-1272-00
A22A1U2031	156-0230-02		MICROCKT,DGTL:ECL,DUAL D-TYPE M/S FF	04713	MC10131LD
A22A1U2041	156-0860-02		MICROCKT,DGTL:TRIPLE LINE RECEIVER	04713	MC10116PD/LD
A22A1U2059	156-1545-00		MICROCKT,LINER:DIODE ARRAY 7 ISOL DIODES	07263	FSA2720M
A22A1U2072	156-1272-00		MICROCKT,LINER:DUAL OPERATIONAL AMPLIFIER	80009	156-1272-00
A22A1VR2021	152-0486-00		SEMICONDC DVC,DI:ZEN,SI,6.2V,2%,400MM,DO-35	80009	152-0486-00

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A22A1W2069	131-0566-00		BUS, CONDUCTOR: DUMMY RES, 0.094 OD X 0.225 L	24546	OMA 07
A22A1W2081	131-0566-00		BUS, CONDUCTOR: DUMMY RES, 0.094 OD X 0.225 L	24546	OMA 07
A22A2	-----		(PART OF A22)		
A22A2C2200	281-0825-00		CAP, FXD, CER DI: 0.005UF, +100-0%, 100V	33095	51-726-008
A22A2C2201	281-0825-00		CAP, FXD, CER DI: 0.005UF, +100-0%, 100V	33095	51-726-008
A22A2C2202	281-0825-00		CAP, FXD, CER DI: 0.005UF, +100-0%, 100V	33095	51-726-008
A22A2C2203	281-0875-00		CAP, FXD, CER DI: 100PF, 20%, 200V	72982	2425001X5U101M
A22A2C2204	281-0875-00		CAP, FXD, CER DI: 100PF, 20%, 200V	72982	2425001X5U101M
A22A2P220	131-2017-00		CONN, RCPT, ELEC:	24931	3JR152-1
A22A2P221	131-1170-00		CONN, RCPT, ELEC: SNAP-ON, MALE	98291	051-045-0249
A22A2P222	131-2017-00		CONN, RCPT, ELEC:	24931	3JR152-1
A22A2AAC1014	283-0181-00		CAP, FXD, CER DI: 1.8PF, +/-0.1%, 100V	51642	100 100NP0189B
A22A2A1	670-7395-01		CIRCUIT BD ASSY: 2182MHZ MICRO STRIP OSC	80009	670-7395-01
A22A2A1C1011	283-0181-00		CAP, FXD, CER DI: 1.8PF, +/-0.1%, 100V	51642	100 100NP0189B
A22A2A1C1013	283-0220-03		CAP, FXD, CER DI: 0.01UF, 20%, 50V SQUARE	04222	SR155C103MAA
A22A2A1C1033	283-0181-00		CAP, FXD, CER DI: 1.8PF, +/-0.1%, 100V	51642	100 100NP0189B
A22A2A1C2011	283-0220-03		CAP, FXD, CER DI: 0.01UF, 20%, 50V SQUARE	04222	SR155C103MAA
A22A2A1C2012	283-0181-00		CAP, FXD, CER DI: 1.8PF, +/-0.1%, 100V	51642	100 100NP0189B
A22A2A1C2013	283-0181-00		CAP, FXD, CER DI: 1.8PF, +/-0.1%, 100V	51642	100 100NP0189B
A22A2A1C2023	283-0181-00		CAP, FXD, CER DI: 1.8PF, +/-0.1%, 100V	51642	100 100NP0189B
A22A2A1C2024	290-0517-00		CAP, FXD, ELCTLT: 6.8UF, 20%, 35V	05397	T368B685M035AZ
A22A2A1C2025	283-0181-00		CAP, FXD, CER DI: 1.8PF, +/-0.1%, 100V	51642	100 100NP0189B
A22A2A1C2031	283-0181-00		CAP, FXD, CER DI: 1.8PF, +/-0.1%, 100V	51642	100 100NP0189B
A22A2A1C2032	283-0220-03		CAP, FXD, CER DI: 0.01UF, 20%, 50V SQUARE	04222	SR155C103MAA
A22A2A1C2033	283-0220-03		CAP, FXD, CER DI: 0.01UF, 20%, 50V SQUARE	04222	SR155C103MAA
A22A2A1CR1028	152-0722-00		SEMICON DVC, DI: VVC, SI, 45 V, 1.5 PF AT 4 V	17540	DVH-6934-98
A22A2A1CR2013	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A22A2A1CR2021	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A22A2A1CR2031	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A22A2A1L1011	108-0682-00		COIL, RF: FIXED, 61NH	80009	108-0682-00
A22A2A1L1014	108-0682-00		COIL, RF: FIXED, 61NH	80009	108-0682-00
A22A2A1L2011	108-0682-00		COIL, RF: FIXED, 61NH	80009	108-0682-00
A22A2A1L2013	108-0682-00		COIL, RF: FIXED, 61NH	80009	108-0682-00
A22A2A1L2023	108-0682-00		COIL, RF: FIXED, 61NH	80009	108-0682-00
A22A2A1L2025	108-0682-00		COIL, RF: FIXED, 61NH	80009	108-0682-00
A22A2A1L2031	108-0682-00		COIL, RF: FIXED, 61NH	80009	108-0682-00
A22A2A1L2032	108-0682-00		COIL, RF: FIXED, 61NH	80009	108-0682-00
A22A2A1L2033	108-0682-00		COIL, RF: FIXED, 61NH	80009	108-0682-00
A22A2A1Q1011	151-0689-00		TRANSISTOR: NPN, SI, MICRO-X	80009	151-0689-00
A22A2A1Q1021	151-0630-00		TRANSISTOR: NPN, SI, 4 LEAD, CER PKG	S0545	NE02135
A22A2A1Q1031	151-0689-00		TRANSISTOR: NPN, SI, MICRO-X	80009	151-0689-00
A22A2A1Q2021	151-0301-00		TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A22A2A1R1011	317-0101-00		RES, FXD, CMPSN: 100 OHM, 5%, 0.125W	01121	BB1015
A22A2A1R1012	321-0134-00		RES, FXD, FILM: 243 OHM, 1%, 0.125W, TC=TO	19701	5043ED243ROF
A22A2A1R1013	321-0216-00		RES, FXD, FILM: 1.74K OHM, 1%, 0.125W, TC=TO	07716	CEAD17400F
A22A2A1R1015	317-0104-00		RES, FXD, CMPSN: 100K OHM, 5%, 0.125W	01121	BB1045
A22A2A1R1021	317-0101-00		RES, FXD, CMPSN: 100 OHM, 5%, 0.125W	01121	BB1015
A22A2A1R1022	317-0101-00		RES, FXD, CMPSN: 100 OHM, 5%, 0.125W	01121	BB1015
A22A2A1R1023	317-0240-00		RES, FXD, CMPSN: 24 OHM, 5%, 0.125W	01121	BB2405
A22A2A1R1026	317-0240-00		RES, FXD, CMPSN: 24 OHM, 5%, 0.125W	01121	BB2405
A22A2A1R1027	317-0101-00		RES, FXD, CMPSN: 100 OHM, 5%, 0.125W	01121	BB1015
A22A2A1R1028	317-0101-00		RES, FXD, CMPSN: 100 OHM, 5%, 0.125W	01121	BB1015
A22A2A1R1029	317-0240-00		RES, FXD, CMPSN: 24 OHM, 5%, 0.125W	01121	BB2405
A22A2A1R1032	317-0101-00		RES, FXD, CMPSN: 100 OHM, 5%, 0.125W	01121	BB1015
A22A2A1R1033	317-0101-00		RES, FXD, CMPSN: 100 OHM, 5%, 0.125W	01121	BB1015
A22A2A1R2013	321-0250-00		RES, FXD, FILM: 3.92K OHM, 1%, 0.125W, TC=TO	07716	CEAD39200F
A22A2A1R2014	317-0243-00		RES, FXD, CMPSN: 24K OHM, 5%, 0.125W	01121	BB2435
A22A2A1R2015	317-0472-00		RES, FXD, CMPSN: 4.7K OHM, 5%, 0.125W	01121	BB4725

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A22A2A1R2016	317-0622-00		RES,FXD,CMPSN:6.2K OHM,5%,0.125W	01121	BB6225
A22A2A1R2017	317-0390-00		RES,FXD,CMPSN:39 OHM,5%,0.125W	01121	BB3905
A22A2A1R2021	317-0103-00		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A22A2A1R2022	317-0102-00		RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A22A2A1R2023	317-0390-00		RES,FXD,CMPSN:39 OHM,5%,0.125W	01121	BB3905
A22A2A1R2024	317-0151-00		RES,FXD,CMPSN:150 OHM,5%,0.125W	01121	BB1515
A22A2A1R2025	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R2030	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R2031	321-0265-00		RES,FXD,FILM:5.62K OHM,1%,0.125W,TC=T0	19701	5043ED5K620F
A22A2A1R2032	321-0932-00		RES,FXD,FILM:2.5K OHM,1%,0.125W,TC=T0	24546	NA55D2501F
A22A2A1R2033	321-0149-00		RES,FXD,FILM:348 OHM,1%,0.125W,TC=T0	07716	CEAD348R0F
A22A2A2	670-7076-01		CIRCUIT BD ASSY:2200MHZ REF	80009	670-7076-01
A22A2A2C1025	283-0157-00		CAP,FXD,CER DI:7PF,5%,50V	04222	SR155A7R0DAA
A22A2A2C1029	283-0070-00		CAP,FXD,CER DI:30PF,10%,50V	51642	200-050-NP0-300K
A22A2A2C1036	283-0154-00		CAP,FXD,CER DI:22PF,5%,50V	04222	SR155A220JAA
A22A2A2C1038	283-0156-00		CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A22A2A2C2015	283-0185-00		CAP,FXD,CER DI:2.5PF,0.5%,50V	51642	100-050-NP0-259B
A22A2A2C2021	283-0220-03		CAP,FXD,CER DI:0.01UF,20%,50V SQUARE	04222	SR155C103MAA
A22A2A2C2023	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A22A2A2C2026	283-0108-00		CAP,FXD,CER DI:220PF,10%,200V	04222	SR152A221KAA
A22A2A2C3015	283-0158-00		CAP,FXD,CER DI:1PF,+/-0.1PF,50V	51642	100-050-NP0-109B
A22A2A2C3024	290-0517-00		CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ
A22A2A2CR2014	152-0153-04		SEMICONDC DVC,DI:SW,SI,10V,10MA	01295	PG7032
A22A2A2E2014	276-0543-00		SHLD BEAD,ELEK:FERRITE	80009	276-0543-00
A22A2A2E2015	276-0543-00		SHLD BEAD,ELEK:FERRITE	80009	276-0543-00
A22A2A2L1025	108-0436-00		COIL,RF:FIXED,240UH ON FORM	80009	108-0436-00
A22A2A2L1034	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A22A2A2Q1024	151-0441-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF501
A22A2A2Q2024	151-0441-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF501
A22A2A2R2018	317-0330-00		RES,FXD,CMPSN:33 OHM,5%,0.125W	01121	BB3305
A22A2A2R2019	317-0431-00		RES,FXD,CMPSN:430 OHM,5%,0.125W	01121	BB4315
A22A2A2R2021	315-0122-00		RES,FXD,FILM:1.2K OHM,5%,0.25W	57668	NTR25J-E01K2
A22A2A2R2023	315-0821-00		RES,FXD,FILM:820 OHM,5%,0.25W	19701	5043CX820R0J
A22A2A2R2032	315-0331-00		RES,FXD,FILM:330 OHM,5%,0.25W	57668	NTR25J-E330E
A22A2A2R2033	315-0331-00		RES,FXD,FILM:330 OHM,5%,0.25W	57668	NTR25J-E330E
A22A2A2R3014	317-0301-00		RES,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A22A2A2R3015	317-0360-00		RES,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A22A2A2R3016	317-0360-00		RES,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A22A2A2R3021	317-0301-00		RES,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A22A2A2R3025	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A22A2A2T2015	120-1393-00		TRANSFORMER,RF:BALUN	80009	120-1393-00
A22A2A3	670-7079-00		CIRCUIT BD ASSY:2200MHZ REFERENCE MIXER	80009	670-7079-00
A22A2A3C1013	283-0107-00		CAP,FXD,CER DI:51PF,5%,200V	04222	SR206A510JAA
A22A2A3C1014	283-0108-00		CAP,FXD,CER DI:220PF,10%,200V	04222	SR152A221KAA
A22A2A3C1015	283-0108-00		CAP,FXD,CER DI:220PF,10%,200V	04222	SR152A221KAA
A22A2A3C1016	283-0139-00		CAP,FXD,CER DI:150PF,20%,50V	05397	C312C151M5G5CA
A22A2A3CR1011	152-0322-00		SEMICONDC DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A22A2A3CR1012	152-0322-00		SEMICONDC DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A22A2A3L1013	108-0182-00		COIL,RF:FIXED,293NH	80009	108-0182-00
A22A2A3L1014	108-0182-00		COIL,RF:FIXED,293NH	80009	108-0182-00
A22A2A3L1015	108-0182-00		COIL,RF:FIXED,293NH	80009	108-0182-00
A23	119-1131-05		SEC CONN ASSY:829MHZ	80009	119-1131-05
A23C230	281-0825-00		CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A23C231	281-0697-00		CAP,FXD,CER DI:5000PF,+100-0%,100V	72982	2425-003W5W0502Z
A23C232	281-0825-00		CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A23C233	281-0697-00		CAP,FXD,CER DI:5000PF,+100-0%,100V	72982	2425-003W5W0502Z
A23C234	281-0825-00		CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A23C235	281-0697-00		CAP,FXD,CER DI:5000PF,+100-0%,100V	72982	2425-003W5W0502Z

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A23C236	281-0825-00		CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A23C237	281-0697-00		CAP,FXD,CER DI:5000PF,+100-0%,100V	72982	2425-003W5W0502Z
A23C239	281-0697-00		CAP,FXD,CER DI:5000PF,+100-0%,100V	72982	2425-003W5W0502Z
A23P231	131-2017-00		CONN,RCPT,ELEC:	24931	3JR152-1
A23P232	131-1170-00		CONN,RCPT,ELEC:SNAP-ON,MALE	98291	051-045-0249
A23P233	131-1170-00		CONN,RCPT,ELEC:SNAP-ON,MALE	98291	051-045-0249
A23P235	131-1170-00		CONN,RCPT,ELEC:SNAP-ON,MALE	98291	051-045-0249
A23P236	131-2017-00		CONN,RCPT,ELEC:	24931	3JR152-1
A23P237	131-2017-00		CONN,RCPT,ELEC:	24931	3JR152-1
A23U1013	156-0285-00		MICROCKT,LINER:VOLTAGE REGULATOR	04713	MC7812CT
A23U2026	156-0872-00		MICROCKT,LINER:VOLTAGE REGULATOR	04713	MC7912CT
A23U3024	156-0277-00		MICROCKT,LINER:VOLTAGE REGULATOR	04713	LM340T-5.0
A23A1	670-5936-00		CIRCUIT BD ASSY:719MHZ SECOND LO	80009	670-5936-00
A23A1C1011	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A1C1012	283-0330-00		CAP,FXD,CER DI:100PF,5%,50V	05397	C320C101J5R5CA
A23A1C1013	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A1C1021	283-0159-00		CAP,FXD,CER DI:18PF,5%,50V	04222	SR155A180JAA
A23A1C1022	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A1C1023	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A1C1024	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A23A1C1025	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A23A1C2011	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A1C2012	283-0160-00		CAP,FXD,CER DI:1.5PF,+/-0.1PF,50V	51642	100050NP0159B
A23A1C2013	283-0158-00		CAP,FXD,CER DI:1PF,+/-0.1PF,50V	51642	100-050-NPO-109B
A23A1C2014	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A23A1C2015	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A23A1C2021	283-0159-00		CAP,FXD,CER DI:18PF,5%,50V	04222	SR155A180JAA
A23A1C2022	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A1C2023	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A1C2024	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A23A1CR1011	152-0738-00		SEMICONV DVC,DI:VVC,SI,30V,1.2PF,DO-35	50101	GC-10580-15
A23A1L1011	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A1L1021	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A1L2010	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A1L2021	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A1Q1021	151-0630-00		TRANSISTOR:NPN,SI,4 LEAD,CER PKG	S0545	NE02135
A23A1Q2014	151-0447-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF502-1
A23A1Q2021	151-0630-00		TRANSISTOR:NPN,SI,4 LEAD,CER PKG	S0545	NE02135
A23A1R1011	317-0101-00		RES,FXD,CMPNSN:100 OHM,5%,0.125W	01121	BB1015
A23A1R1020	317-0220-00		RES,FXD,CMPNSN:22 OHM,5%,0.125W	01121	BB2205
A23A1R1021	317-0750-00		RES,FXD,CMPNSN:75 OHM,5%,0.125W	01121	BB7505
A23A1R1022	317-0330-00		RES,FXD,CMPNSN:33 OHM,5%,0.125W	01121	BB3305
A23A1R1023	317-0272-00		RES,FXD,CMPNSN:2.7K OHM,5%,0.125W	01121	BB2725
A23A1R1024	315-0271-00		RES,FXD,FILM:270 OHM,5%,0.25W	57668	NTR25J-E270E
A23A1R1025	317-0471-00		RES,FXD,CMPNSN:470 OHM,5%,0.125W	01121	BB4715
A23A1R2010	317-0510-00		RES,FXD,CMPNSN:51 OHM,5%,0.125W	01121	BB5105
A23A1R2011	317-0470-00		RES,FXD,CMPNSN:47 OHM,5%,0.125W	01121	BB4705
A23A1R2012	317-0102-00		RES,FXD,CMPNSN:1K OHM,5%,0.125W	01121	BB1025
A23A1R2013	317-0241-00		RES,FXD,CMPNSN:240 OHM,5%,0.125W	01121	BB2415
A23A1R2014	317-0202-00		RES,FXD,CMPNSN:2K OHM,5%,0.125W	01121	BB2025
A23A1R2016	315-0271-00		RES,FXD,FILM:270 OHM,5%,0.25W	57668	NTR25J-E270E
A23A1R2021	317-0510-00		RES,FXD,CMPNSN:51 OHM,5%,0.125W	01121	BB5105
A23A1R2023	317-0272-00		RES,FXD,CMPNSN:2.7K OHM,5%,0.125W	01121	BB2725
A23A1R2024	317-0471-00		RES,FXD,CMPNSN:470 OHM,5%,0.125W	01121	BB4715
A23A1R2025	317-0241-00		RES,FXD,CMPNSN:240 OHM,5%,0.125W	01121	BB2415
A23A1R2026	317-0510-00		RES,FXD,CMPNSN:51 OHM,5%,0.125W	01121	BB5105
A23A1R2027	317-0360-00		RES,FXD,CMPNSN:36 OHM,5%,0.125W	01121	BB3605
A23A1R2028	317-0360-00		RES,FXD,CMPNSN:36 OHM,5%,0.125W	01121	BB3605



Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A23A1R2029	317-0301-00		RES,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A23A2	670-5937-03		CIRCUIT BD ASSY:25MHZ PHASE LOCK	80009	670-5937-03
A23A2C1011	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A23A2C1024	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A23A2C1031	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A23A2C1037	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A23A2C1045	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A23A2C1046	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A23A2C1049	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A23A2C1052	290-0876-00		CAP,FXD,ELCTLT:15UF,20%,25 WVDC	05397	T330C156M025AS
A23A2C1057	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A23A2C2011	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A2C2012	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A2C2021	290-0876-00		CAP,FXD,ELCTLT:15UF,20%,25 WVDC	05397	T330C156M025AS
A23A2C2023	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A2C2024	290-0876-00		CAP,FXD,ELCTLT:15UF,20%,25 WVDC	05397	T330C156M025AS
A23A2C2025	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A2C2032	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A2C2041	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A23A2C2042	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A23A2C2051	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A2C2052	290-0876-00		CAP,FXD,ELCTLT:15UF,20%,25 WVDC	05397	T330C156M025AS
A23A2C2053	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A2C2054	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A2C2055	283-0197-00		CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A23A2C2056	290-0876-00		CAP,FXD,ELCTLT:15UF,20%,25 WVDC	05397	T330C156M025AS
A23A2C2057	290-0876-00		CAP,FXD,ELCTLT:15UF,20%,25 WVDC	05397	T330C156M025AS
A23A2C3021	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A2C3022	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A2C3023	290-0876-00		CAP,FXD,ELCTLT:15UF,20%,25 WVDC	05397	T330C156M025AS
A23A2C3031	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A2C3035	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A2C3038	290-0876-00		CAP,FXD,ELCTLT:15UF,20%,25 WVDC	05397	T330C156M025AS
A23A2C3042	283-0197-00		CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A23A2C3043	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A2C3044	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A2C3055	283-0186-00		CAP,FXD,CER DI:27PF,5%,50V	04222	SR155A 270JAA
A23A2C3056	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A2CR2015	152-0141-02		SEMICOND DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A23A2CR3025	152-0066-00		SEMICOND DVC,DI:RECT,SI,400V,1A,DO-41	05828	GP10G-020
A23A2L2013	108-1140-00		COIL,RF:FXD,1.1MH	TK1345	108-1140-00
A23A2L2018	108-1140-00		COIL,RF:FXD,1.1MH	TK1345	108-1140-00
A23A2L2031	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A2L2033	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A2L3011	108-1140-00		COIL,RF:FXD,1.1MH	TK1345	108-1140-00
A23A2L3034	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A2Q2016	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A23A2Q2017	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A23A2Q3015	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A23A2R1021	317-0510-00		RES,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A23A2R1023	317-0510-00		RES,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A23A2R1026	317-0471-00		RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R1027	317-0471-00		RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R1029	317-0471-00		RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R1032	317-0047-00		RES,FXD,CMPSN:4.7 OHM,5%,0.125W	01121	BB47G5
A23A2R1033	317-0471-00		RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R1034	317-0047-00		RES,FXD,CMPSN:4.7 OHM,5%,0.125W	01121	BB47G5
A23A2R1035	317-0471-00		RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A23A2R1038	317-0471-00		RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R1041	317-0047-00		RES,FXD,CMPSN:4.7 OHM,5%,0.125W	01121	BB4765
A23A2R1043	317-0471-00		RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R1051	317-0100-00		RES,FXD,CMPSN:10 OHM,5%,0.125W	01121	BB1005
A23A2R1058	317-0510-00		RES,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A23A2R2014	317-0393-00		RES,FXD,CMPSN:39K OHM,5%,0.125W	01121	BB3935
A23A2R2015	317-0203-00		RES,FXD,CMPSN:20K OHM,5%,0.125W	01121	BB2035
A23A2R2034	317-0047-00		RES,FXD,CMPSN:4.7 OHM,5%,0.125W	01121	BB4765
A23A2R2040	317-0471-00		RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R2041	317-0102-00		RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A23A2R2043	317-0471-00		RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R2044	317-0102-00		RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A23A2R2045	317-0102-00		RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A23A2R2046	317-0471-00		RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R2047	317-0471-00		RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R2048	317-0361-00		RES,FXD,CMPSN:360 OHM,5%,0.125W	01121	BB3615
A23A2R2049	317-0471-00		RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R2051	317-0470-00		RES,FXD,CMPSN:47 OHM,5%,0.125W	01121	BB4705
A23A2R2052	317-0510-00		RES,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A23A2R2053	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A2R2054	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A2R2055	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A2R2056	317-0361-00		RES,FXD,CMPSN:360 OHM,5%,0.125W	01121	BB3615
A23A2R3012	317-0303-00		RES,FXD,CMPSN:30K OHM,5%,0.125W	01121	BB3035
A23A2R3013	317-0203-00		RES,FXD,CMPSN:20K OHM,5%,0.125W	01121	BB2035
A23A2R3014	317-0752-00		RES,FXD,CMPSN:7.5K OHM,5%,0.125W	01121	BB7525
A23A2R3016	317-0752-00		RES,FXD,CMPSN:7.5K OHM,5%,0.125W	01121	BB7525
A23A2R3037	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A2R3041	317-0361-00		RES,FXD,CMPSN:360 OHM,5%,0.125W	01121	BB3615
A23A2R3045	317-0361-00		RES,FXD,CMPSN:360 OHM,5%,0.125W	01121	BB3615
A23A2R3046	317-0471-00		RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R3051	317-0332-00		RES,FXD,CMPSN:3.3K OHM,5%,0.125W	01121	BB3325
A23A2R3052	317-0752-00		RES,FXD,CMPSN:7.5K OHM,5%,0.125W	01121	BB7525
A23A2R3054	317-0100-00		RES,FXD,CMPSN:10 OHM,5%,0.125W	01121	BB1005
A23A2U1022	156-0860-02		MICROCKT,DGTL:TRIPLE LINE RECEIVER	04713	MC10116PD/LD
A23A2U1036	156-0230-02		MICROCKT,DGTL:ECL,DUAL D-TYPE M/S FF	04713	MC10131LD
A23A2U1044	156-0860-02		MICROCKT,DGTL:TRIPLE LINE RECEIVER	04713	MC10116PD/LD
A23A2U1053	156-0074-00		MICROCKT,LINEAR:VIDEO AMPL,DIFF INP-OUT	80009	156-0074-00
A23A2U2047	156-0230-02		MICROCKT,DGTL:ECL,DUAL D-TYPE M/S FF	04713	MC10131LD
A23A2U3053	156-0742-02		MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A23A2VR1048	152-0647-00		SEMICONDC DVC,DI:ZENER,SI,6.8V,5%,400MW,DO-7	04713	1N957B
A23A3	670-6016-00		CIRCUIT BD ASSY:829MHZ HARMONIC MIXER	80009	670-6016-00
A23A3C1021	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A3C1022	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A3C1023	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A3C2021	283-0159-00		CAP,FXD,CER DI:18PF,5%,50V	04222	SR155A180JAA
A23A3C2023	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A3C2024	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A3C3011	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A3C3013	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A23A3C3014	283-0159-00		CAP,FXD,CER DI:18PF,5%,50V	04222	SR155A180JAA
A23A3C3020	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A23A3C3021	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A23A3C3022	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A3C3023	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A3C3024	283-0159-00		CAP,FXD,CER DI:18PF,5%,50V	04222	SR155A180JAA
A23A3C3025	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A3CR2021	152-0322-00		SEMICONDC DVC,DI:SCHOTTKY,SI,1.5V,1.2PF,DO-35	50434	5082-2672

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A23A3CR3011	152-0322-00		SEMICONDCVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A23A3L2014	108-0643-00		COIL,RF:FIXED,54NH	80009	108-0643-00
A23A3L3011	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A3L3012	108-0215-00		COIL,RF:FIXED,1.1UH	TK1345	108-0215-00
A23A3L3014	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A3L3021	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A3Q3021	151-0630-00		TRANSISTOR:NPN,SI,4 LEAD,CER PKG	S0545	NE02135
A23A3R1021	317-0820-00		RES,FXD,CMPSN:82 OHM,5%,0.125W	01121	BB8205
A23A3R1022	317-0820-00		RES,FXD,CMPSN:82 OHM,5%,0.125W	01121	BB8205
A23A3R1023	317-0430-00		RES,FXD,CMPSN:43 OHM,5%,0.125W	01121	BB4305
A23A3R2021	317-0301-00		RES,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A23A3R2022	317-0160-00		RES,FXD,CMPSN:16 OHM,5%,0.125W	01121	BB1605
A23A3R2023	317-0680-00		RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A23A3R2024	317-0430-00		RES,FXD,CMPSN:43 OHM,5%,0.125W	01121	BB4305
A23A3R2025	317-0820-00		RES,FXD,CMPSN:82 OHM,5%,0.125W	01121	BB8205
A23A3R2026	317-0820-00		RES,FXD,CMPSN:82 OHM,5%,0.125W	01121	BB8205
A23A3R2027	317-0680-00		RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A23A3R2028	317-0160-00		RES,FXD,CMPSN:16 OHM,5%,0.125W	01121	BB1605
A23A3R3010	317-0222-00		RES,FXD,CMPSN:2.2K OHM,5%,0.125W	01121	BB2225
A23A3R3011	315-0271-00		RES,FXD,FILM:270 OHM,5%,0.25W	57668	NTR25J-E270E
A23A3R3012	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A3R3021	317-0360-00		RES,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A23A3R3022	317-0360-00		RES,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A23A3R3023	317-0301-00		RES,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A23A3R3024	317-0471-00		RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A3R3025	317-0272-00		RES,FXD,CMPSN:2.7K OHM,5%,0.125W	01121	BB2725
A23A3R3027	317-0750-00		RES,FXD,CMPSN:75 OHM,5%,0.125W	01121	BB7505
A23A3R3028	317-0510-00		RES,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A23A3R3029	317-0750-00		RES,FXD,CMPSN:75 OHM,5%,0.125W	01121	BB7505
A23A4	670-6256-03		CIRCUIT BD ASSY:829MHZ DIPLEXER	80009	670-6256-03
A23A4C1010	283-0158-00		CAP,FXD,CER DI:1PF,+/-0.1PF,50V	51642	100-050-NPO-109B
A23A4C1011	283-0158-00		CAP,FXD,CER DI:1PF,+/-0.1PF,50V	51642	100-050-NPO-109B
A23A4C1012	283-0203-00		CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR3055C474MAA
A23A4C1013	283-0158-00		CAP,FXD,CER DI:1PF,+/-0.1PF,50V	51642	100-050-NPO-109B
A23A4C1014	283-0158-00		CAP,FXD,CER DI:1PF,+/-0.1PF,50V	51642	100-050-NPO-109B
A23A4C1015	283-0160-00		CAP,FXD,CER DI:1.5PF,+/-0.1PF,50V	51642	100050NP0159B
A23A4C1016	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A4C1017	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A4C1018	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A4C1019	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A4C1021	283-0158-00		CAP,FXD,CER DI:1PF,+/-0.1PF,50V	51642	100-050-NPO-109B
A23A4L1010	108-1043-00		COIL,RF:FXD,2MH	80009	108-1043-00
A23A4L1011	108-0598-00		COIL,RF:FIXED,200UH	80009	108-0598-00
A23A4L1012	108-0642-00		COIL,RF:FIXED,30NH	80009	108-0642-00
A23A4L1015	108-0642-00		COIL,RF:FIXED,30NH	80009	108-0642-00
A23A4R1011	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A4R1012	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A4R1013	317-0200-00		RES,FXD,CMPSN:20 OHM,5%,0.125W	01121	BB2005
A23A4R1014	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A4R1015	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A5	670-6255-01		CIRCUIT BD ASSY:829MHZ AMPL	80009	670-6255-01
A23A5C1011	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A5C1012	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A5C1013	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A5C1014	283-0197-00		CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A23A5C1015	283-0160-00		CAP,FXD,CER DI:1.5PF,+/-0.1PF,50V	51642	100050NP0159B
A23A5C1016	283-0197-00		CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A23A5C1017	283-0160-00		CAP,FXD,CER DI:1.5PF,+/-0.1PF,50V	51642	100050NP0159B

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A23ASC1018	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23ASC1021	283-0160-00		CAP,FXD,CER DI:1.5PF,+/-0.1PF,50V	51642	100050NP0159B
A23ASC1022	283-0160-00		CAP,FXD,CER DI:1.5PF,+/-0.1PF,50V	51642	100050NP0159B
A23ASC1023	283-0197-00		CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A23ASC1024	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23ASC1025	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23ASC1026	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23ASC1027	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23ASC1029	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23ASCR1013	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A23ASCR1022	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A23ASJ1029	131-1003-00		CONN,RCPT,ELEC:CKT BD MT,3 PRONG	80009	131-1003-00
A23A5L1011	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A5L1012	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A5L1014	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A5L1021	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A5L1024	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A5L1025	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A5L1029	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A5Q1017	151-0630-00		TRANSISTOR:NPN,SI,4 LEAD,CER PKG	S0545	NE02135
A23A5Q1025	151-0630-00		TRANSISTOR:NPN,SI,4 LEAD,CER PKG	S0545	NE02135
A23A5R1011	321-0234-00		RES,FXD,FILM:2.67K OHM,1%,0.125W,TC=TO	19701	5033ED2K67F
A23A5R1012	321-0202-00		RES,FXD,FILM:1.24K OHM,1%,0.125W,TC=TO	24546	NA55D1241F
A23A5R1013	317-0511-00		RES,FXD,CMPSN:510 OHM,5%,0.125W	01121	BB5115
A23A5R1014	317-0511-00		RES,FXD,CMPSN:510 OHM,5%,0.125W	01121	BB5115
A23A5R1015	317-0151-00		RES,FXD,CMPSN:150 OHM,5%,0.125W	01121	BB1515
A23A5R1016	317-0201-00		RES,FXD,CMPSN:200 OHM,5%,0.125W	01121	BB2015
A23A5R1020	317-0201-00		RES,FXD,CMPSN:200 OHM,5%,0.125W	01121	BB2015
A23A5R1021	321-0202-00		RES,FXD,FILM:1.24K OHM,1%,0.125W,TC=TO	24546	NA55D1241F
A23A5R1022	321-0234-00		RES,FXD,FILM:2.67K OHM,1%,0.125W,TC=TO	19701	5033ED2K67F
A23A5R1023	317-0151-00		RES,FXD,CMPSN:150 OHM,5%,0.125W	01121	BB1515
A23A5R1024	317-0331-00		RES,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A23A5R1025	317-0331-00		RES,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A23A5R1026	317-0360-00		RES,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A23A5R1027	317-0360-00		RES,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A23A5R1028	317-0301-00		RES,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A23A5R1029	317-0301-00		RES,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A23A6	670-6015-01		CIRCUIT BD ASSY:110MHZ IF SELECT	80009	670-6015-01
A23A6C1011	283-0197-00		CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A23A6C1012	283-0197-00		CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A23A6C1013	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A6C1014	283-0220-03		CAP,FXD,CER DI:0.01UF,20%,50V SQUARE	04222	SR155C103MAA
A23A6C1015	283-0220-03		CAP,FXD,CER DI:0.01UF,20%,50V SQUARE	04222	SR155C103MAA
A23A6C1016	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A6C1017	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A6C1018	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A6C2011	283-0220-03		CAP,FXD,CER DI:0.01UF,20%,50V SQUARE	04222	SR155C103MAA
A23A6C2012	283-0159-00		CAP,FXD,CER DI:18PF,5%,50V	04222	SR155A180JAA
A23A6C2013	283-0197-00		CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A23A6C2014	283-0197-00		CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A23A6C2015	283-0220-03		CAP,FXD,CER DI:0.01UF,20%,50V SQUARE	04222	SR155C103MAA
A23A6C2016	283-0220-03		CAP,FXD,CER DI:0.01UF,20%,50V SQUARE	04222	SR155C103MAA
A23A6C2017	283-0154-00		CAP,FXD,CER DI:22PF,5%,50V	04222	SR155A220JAA
A23A6CR1011	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A23A6CR1015	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A23A6CR2011	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A23A6CR2012	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A23A6CR2013	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A23A6CR2015	152-0141-02		SEMICONDC DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A23A6L1014	108-0341-00		COIL,RF:FIXED,1.4UH	80009	108-0341-00
A23A6L1015	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A6L1018	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A6L1019	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A6L2011	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A6L2013	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A6L2014	108-0311-00		COIL,RF:FIXED,150NH	TK1345	108-0311-00
A23A6L2015	108-0341-00		COIL,RF:FIXED,1.4UH	80009	108-0341-00
A23A6Q1011	151-0630-00		TRANSISTOR:NPN,SI,4 LEAD,CER PKG	S0545	NE02135
A23A6Q1012	151-0301-00		TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A23A6Q2015	151-0301-00		TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A23A6R1010	317-0472-00		RES,FXD,CMPSN:4.7K OHM,5%,0.125W	01121	BB4725
A23A6R1011	317-0056-00		RES,FXD,CMPSN:5.6 OHM,5%,0.125W	01121	BB5665
A23A6R1012	317-0911-00		RES,FXD,CMPSN:910 OHM,5%,0.125W	01121	BB9115
A23A6R1013	317-0910-00		RES,FXD,CMPSN:91 OHM,5%,0.125W	01121	BB9105
A23A6R1014	317-0822-00		RES,FXD,CMPSN:8.2K OHM,5%,0.125W	01121	BB8225
A23A6R1015	317-0153-00		RES,FXD,CMPSN:15K OHM,5%,0.125W	01121	BB1535
A23A6R1016	317-0752-00		RES,FXD,CMPSN:7.5K OHM,5%,0.125W	01121	BB7525
A23A6R1017	317-0201-00		RES,FXD,CMPSN:200 OHM,5%,0.125W	01121	BB2015
A23A6R1018	317-0331-00		RES,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A23A6R1019	317-0203-00		RES,FXD,CMPSN:20K OHM,5%,0.125W	01121	BB2035
A23A6R2015	317-0181-00		RES,FXD,CMPSN:180 OHM,5%,0.125W	01121	BB1815
A23A7	670-6224-00		CIRCUIT BD ASSY:829MHZ,SECOND CONVERTER	80009	670-6224-00
A23A7C1011	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A7C1012	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A7C1013	283-0069-00		CAP,FXD,CER DI:15PF,20%,50V	04222	MA101A150KAA
A23A7C1014	283-0069-00		CAP,FXD,CER DI:15PF,20%,50V	04222	MA101A150KAA
A23A7CR1011	152-0322-00		SEMICONDC DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A23A7CR1012	152-0322-00		SEMICONDC DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A23A7L1011	108-0606-00		COIL,RF:FIXED,31NH	80009	108-0606-00
A23A7L1012	108-0606-00		COIL,RF:FIXED,31NH	80009	108-0606-00
A23A7L1013	108-0606-00		COIL,RF:FIXED,31NH	80009	108-0606-00
A23A7L1014	108-0606-00		COIL,RF:FIXED,31NH	80009	108-0606-00
A23A7R1012	317-0301-00		RES,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A23A7R1013	317-0360-00		RES,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A23A7R1014	317-0360-00		RES,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A23A7R1015	317-0301-00		RES,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A23A7T1011	120-1251-00		TRANSFORMER,RF:BALUN	80009	120-1251-00
A24	119-1010-02		HYBRID CKT ASSY:PHASE GATE DETECTOR	80009	119-1010-02
A24A1	670-5957-01		CIRCUIT BD ASSY:PHASE GATE INPUT	80009	670-5957-01
A24A1C243	290-0747-00		CAP,FXD,ELCTLT:100UF,+50-20%,25WVDC	54473	ECE-825V100L
A24A1C244	290-0747-00		CAP,FXD,ELCTLT:100UF,+50-20%,25WVDC	54473	ECE-825V100L
A24A1R243	315-0200-00		RES,FXD,FILM:20 OHM,5%,0.25W	19701	5043CX20R00J
A24A1R244	315-0200-00		RES,FXD,FILM:20 OHM,5%,0.25W	19701	5043CX20R00J
A25	119-1640-01		HARMONIC MIXER:	80009	119-1640-01
A25W252	175-8739-00		CA ASSY,SP,ELEC:3.26 AWG,3.0 L,RIBBON	TK1375	175-8739-00
A25A3	670-4376-01		CIRCUIT BD ASSY:HARMONIC MIXER INPUT	80009	670-4376-01
A25A3C243	290-0747-00		CAP,FXD,ELCTLT:100UF,+50-20%,25WVDC	54473	ECE-825V100L
A25A3C244	290-0747-00		CAP,FXD,ELCTLT:100UF,+50-20%,25WVDC	54473	ECE-825V100L
A25A3R243	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A25A3R244	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A26	672-0160-00		CIRCUIT BD ASSY:AUX SYNTHESIZER (NO ELECTRICAL PARTS)	80009	672-0160-00
A26A1	670-9163-00		CIRCUIT BD ASSY:AUX SYNTH	80009	670-9163-00
A26A1C1016	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C1020	283-0109-00		CAP,FXD,CER DI:27PF,5%,1000V	59660	858-534CG0270J
A26A1C1021	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A26A1C1023	283-0220-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR205C103MAA
A26A1C1024	283-0333-00		CAP, FXD, CER DI:35PF, 5%, 1000V	72982	838-534 A 350>
A26A1C1046	283-0024-00		CAP, FXD, CER DI:0.1UF, +80-20%, 50V	04222	SR215C104MAA
A26A1C1055	283-0024-00		CAP, FXD, CER DI:0.1UF, +80-20%, 50V	04222	SR215C104MAA
A26A1C1057	283-0024-00		CAP, FXD, CER DI:0.1UF, +80-20%, 50V	04222	SR215C104MAA
A26A1C1066	283-0156-00		CAP, FXD, CER DI:1000PF, +80-20%, 200V	04222	SR152E102ZAA
A26A1C1070	281-0165-00		CAP, VAR, AIR DI:0.8-10PF, 250V	73899	MVM-010W
A26A1C2012	283-0024-00		CAP, FXD, CER DI:0.1UF, +80-20%, 50V	04222	SR215C104MAA
A26A1C2013	283-0220-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR205C103MAA
A26A1C2019	283-0330-00		CAP, FXD, CER DI:1000PF, 5%, 50V	05397	C320C101J5R5CA
A26A1C2021	283-0220-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR205C103MAA
A26A1C2022	283-0220-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR205C103MAA
A26A1C2024	283-0156-00		CAP, FXD, CER DI:1000PF, +80-20%, 200V	04222	SR152E102ZAA
A26A1C2040	283-0024-00		CAP, FXD, CER DI:0.1UF, +80-20%, 50V	04222	SR215C104MAA
A26A1C2046	283-0024-00		CAP, FXD, CER DI:0.1UF, +80-20%, 50V	04222	SR215C104MAA
A26A1C2047	283-0220-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR205C103MAA
A26A1C2052	283-0156-00		CAP, FXD, CER DI:1000PF, +80-20%, 200V	04222	SR152E102ZAA
A26A1C2053	283-0024-00		CAP, FXD, CER DI:0.1UF, +80-20%, 50V	04222	SR215C104MAA
A26A1C2054	283-0156-00		CAP, FXD, CER DI:1000PF, +80-20%, 200V	04222	SR152E102ZAA
A26A1C2055	283-0024-00		CAP, FXD, CER DI:0.1UF, +80-20%, 50V	04222	SR215C104MAA
A26A1C2056	283-0220-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR205C103MAA
A26A1C2059	283-0156-00		CAP, FXD, CER DI:1000PF, +80-20%, 200V	04222	SR152E102ZAA
A26A1C2061	283-0156-00		CAP, FXD, CER DI:1000PF, +80-20%, 200V	04222	SR152E102ZAA
A26A1C2065	283-0201-00		CAP, FXD, CER DI:27PF, 10%, 200V	04222	SR152C270KAA
A26A1C2066	283-0156-00		CAP, FXD, CER DI:1000PF, +80-20%, 200V	04222	SR152E102ZAA
A26A1C2067	283-0220-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR205C103MAA
A26A1C2068	283-0140-00		CAP, FXD, CER DI:4.7PF, +/-0.25PF, 50V	72982	8101E003A479C
A26A1C2069	283-0108-00		CAP, FXD, CER DI:220PF, 10%, 200V	04222	SR152A221KAA
A26A1C2071	283-0201-00		CAP, FXD, CER DI:27PF, 10%, 200V	04222	SR152C270KAA
A26A1C2072	283-0140-00		CAP, FXD, CER DI:4.7PF, +/-0.25PF, 50V	72982	8101E003A479C
A26A1C2073	283-0220-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR205C103MAA
A26A1C2075	283-0220-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR205C103MAA
A26A1C3012	283-0869-00		CAP, FXD, CER DI:68PF, NPO, 100V, 1%	16299	SR151A680JAA
A26A1C3016	283-0472-00		CAP, FXD, CER DI:102PF, 1%, 50V	05397	C320C102F565CA
A26A1C3018	283-0472-00		CAP, FXD, CER DI:102PF, 1%, 50V	05397	C320C102F565CA
A26A1C3022	283-0869-00		CAP, FXD, CER DI:68PF, NPO, 100V, 1%	16299	SR151A680JAA
A26A1C3032	285-0598-00		CAP, FXD, PLASTIC:0.01UF, 5%, 100V	19396	DU490B103J
A26A1C3035	285-0598-00		CAP, FXD, PLASTIC:0.01UF, 5%, 100V	19396	DU490B103J
A26A1C3046	283-0330-00		CAP, FXD, CER DI:100PF, 5%, 50V	05397	C320C101J5R5CA
A26A1C3047	283-0330-00		CAP, FXD, CER DI:100PF, 5%, 50V	05397	C320C101J5R5CA
A26A1C3050	283-0220-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR205C103MAA
A26A1C3051	283-0156-00		CAP, FXD, CER DI:1000PF, +80-20%, 200V	04222	SR152E102ZAA
A26A1C3052	283-0024-00		CAP, FXD, CER DI:0.1UF, +80-20%, 50V	04222	SR215C104MAA
A26A1C3058	283-0024-00		CAP, FXD, CER DI:0.1UF, +80-20%, 50V	04222	SR215C104MAA
A26A1C3066	283-0024-00		CAP, FXD, CER DI:0.1UF, +80-20%, 50V	04222	SR215C104MAA
A26A1C3067	290-0804-00		CAP, FXD, ELCTLT:10UF, +50-20%, 25V	55680	ULB1E100TAAANA
A26A1C3071	283-0220-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR205C103MAA
A26A1C3074	283-0024-00		CAP, FXD, CER DI:0.1UF, +80-20%, 50V	04222	SR215C104MAA
A26A1C4014	283-0024-00		CAP, FXD, CER DI:0.1UF, +80-20%, 50V	04222	SR215C104MAA
A26A1C4017	283-0220-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR205C103MAA
A26A1C4021	283-0024-00		CAP, FXD, CER DI:0.1UF, +80-20%, 50V	04222	SR215C104MAA
A26A1C4026	283-0220-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR205C103MAA
A26A1C4027	283-0220-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR205C103MAA
A26A1C4032	285-0598-00		CAP, FXD, PLASTIC:0.01UF, 5%, 100V	19396	DU490B103J
A26A1C4035	285-0598-00		CAP, FXD, PLASTIC:0.01UF, 5%, 100V	19396	DU490B103J
A26A1C4037	283-0024-00		CAP, FXD, CER DI:0.1UF, +80-20%, 50V	04222	SR215C104MAA
A26A1C4053	283-0220-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR205C103MAA
A26A1C5015	283-0024-00		CAP, FXD, CER DI:0.1UF, +80-20%, 50V	04222	SR215C104MAA

Component No.	Tektronix		Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
	Part No.	Effective	Discont				
A26A1C5016	283-0220-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C5017	283-0220-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C5027	283-0220-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C5052	290-0804-00				CAP,FXD,ELCTLT:10UF,+50-20%,25V	55680	ULB1E100TAANA
A26A1C5056	283-0024-00				CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C5066	283-0024-00				CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C5067	283-0024-00				CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C5068	290-0804-00				CAP,FXD,ELCTLT:10UF,+50-20%,25V	55680	ULB1E100TAANA
A26A1C5072	290-0804-00				CAP,FXD,ELCTLT:10UF,+50-20%,25V	55680	ULB1E100TAANA
A26A1CR1065	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A26A1CR2068	152-0650-00				SEMICON DVC,DI:VVC,30V,11.5PF,A276	50101	U11-4101
A26A1CR4070	152-0322-00				SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A26A1CR4077	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A26A1L1020	108-0733-00				COIL,RF:FIXED,117NH	80009	108-0733-00
A26A1L1074	108-1198-00				COIL,RF:FXD,14NH	TK1345	108-1198-00
A26A1L3014	108-0733-00				COIL,RF:FIXED,117NH	80009	108-0733-00
A26A1L3016	108-0733-00				COIL,RF:FIXED,117NH	80009	108-0733-00
A26A1L3020	108-0733-00				COIL,RF:FIXED,117NH	80009	108-0733-00
A26A1L5059	108-1199-00				COIL,RF:FXD,28UH,11%,TD-615	80009	108-1199-00
A26A1P1028	131-0265-00				CONN,RCPT,ELEC:MINTR,CKT BD MTD,MALE,RTANG	98291	051-053-0000
A26A1P1039	131-0265-00				CONN,RCPT,ELEC:MINTR,CKT BD MTD,MALE,RTANG	98291	051-053-0000
A26A1P1060	131-0265-00				CONN,RCPT,ELEC:MINTR,CKT BD MTD,MALE,RTANG	98291	051-053-0000
A26A1Q1015	151-0282-00				TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A26A1Q2049	151-0630-00				TRANSISTOR:NPN,SI,4 LEAD,CER PKG	S0545	NE02135
A26A1Q2051	151-0301-00				TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A26A1Q2055	151-0301-00				TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A26A1Q2058	151-0752-00				TRANSISTOR:NPN,SI,MARCO T	25403	BFR96
A26A1Q2071	151-0719-00				TRANSISTOR:PMP,SI,TO-92B	04713	SPS8226 (MPSH81)
A26A1Q2076	151-0302-00				TRANSISTOR:NPN,SI,TO-18	04713	ST899
A26A1Q4014	151-0302-00				TRANSISTOR:NPN,SI,TO-18	04713	ST899
A26A1Q4016	151-0302-00				TRANSISTOR:NPN,SI,TO-18	04713	ST899
A26A1Q5027	151-0302-00				TRANSISTOR:NPN,SI,TO-18	04713	ST899
A26A1R1012	315-0621-00				RES,FXD,FILM:620 OHM,5%,0.25W	57668	NTR25J-E620E
A26A1R1017	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A26A1R1018	315-0221-00				RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A26A1R1021	315-0221-00				RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A26A1R1022	315-0101-00				RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A26A1R1045	315-0560-00				RES,FXD,FILM:56 OHM,5%,0.25W	57668	NTR25J-E560E
A26A1R1047	315-0562-00				RES,FXD,FILM:5.6K OHM,5%,0.25W	57668	NTR25J-E05K6
A26A1R1049	315-0202-00				RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A26A1R1051	315-0201-00				RES,FXD,FILM:200 OHM,5%,0.25W	57668	NTR25J-E200E
A26A1R1053	315-0562-00				RES,FXD,FILM:5.6K OHM,5%,0.25W	57668	NTR25J-E05K6
A26A1R1054	315-0132-00				RES,FXD,FILM:1.3K OHM,5%,0.25W	57668	NTR25J-E01K3
A26A1R1056	315-0680-00				RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A26A1R1057	315-0300-00				RES,FXD,FILM:30 OHM,5%,0.25W	19701	5043CX30R00J
A26A1R1066	317-0101-00				RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A26A1R1068	317-0101-00				RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A26A1R2013	315-0152-00				RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A26A1R2016	317-0512-00				RES,FXD,CMPSN:5.1K OHM,5%,0.125	01121	BB5125
A26A1R2017	317-0180-00				RES,FXD,CMPSN:18 OHM,5%,0.125W	01121	BB1805
A26A1R2022	317-0180-00				RES,FXD,CMPSN:18 OHM,5%,0.125W	01121	BB1805
A26A1R2023	317-0180-00				RES,FXD,CMPSN:18 OHM,5%,0.125W	01121	BB1805
A26A1R2024	315-0510-00				RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A26A1R2025	315-0104-00				RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A26A1R2031	321-0184-00				RES,FXD,FILM:806 OHM,1%,0.125W,TC=TO	19701	5033ED806ROF
A26A1R2032	321-0184-00				RES,FXD,FILM:806 OHM,1%,0.125W,TC=TO	19701	5033ED806ROF
A26A1R2044	315-0101-00				RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A26A1R2047	317-0332-00				RES,FXD,CMPSN:3.3K OHM,5%,0.125W	01121	BB3325

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A26A1R2049	317-0100-00		RES,FXD,CMPSN:10 OHM,5%,0.125W	01121	BB1005
A26A1R2050	317-0201-00		RES,FXD,CMPSN:200 OHM,5%,0.125W	01121	BB2015
A26A1R2051	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A26A1R2056	317-0332-00		RES,FXD,CMPSN:3.3K OHM,5%,0.125W	01121	BB3325
A26A1R2057	317-0047-00		RES,FXD,CMPSN:4.7 OHM,5%,0.125W	01121	BB4765
A26A1R2058	317-0511-00		RES,FXD,CMPSN:510 OHM,5%,0.125W	01121	BB5115
A26A1R2060	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A26A1R2065	317-0330-00		RES,FXD,CMPSN:33 OHM,5%,0.125W	01121	BB3305
A26A1R2068	317-0332-00		RES,FXD,CMPSN:3.3K OHM,5%,0.125W	01121	BB3325
A26A1R2071	317-0102-00		RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A26A1R2072	317-0911-00		RES,FXD,CMPSN:910 OHM,5%,0.125W	01121	BB9115
A26A1R2074	317-0332-00		RES,FXD,CMPSN:3.3K OHM,5%,0.125W	01121	BB3325
A26A1R2075	317-0472-00		RES,FXD,CMPSN:4.7K OHM,5%,0.125W	01121	BB4725
A26A1R2076	317-0103-00		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A26A1R3022	315-0471-00		RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A26A1R3037	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10R00J
A26A1R3038	315-0154-00		RES,FXD,FILM:150K OHM,5%,0.25W	57668	NTR25J-E150K
A26A1R3041	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=TO	07716	CEAD12401F
A26A1R3042	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=TO	07716	CEAD12401F
A26A1R3043	321-0315-00		RES,FXD,FILM:18.7K OHM,1%,0.125W,TC=TO	19701	5043ED18K70F
A26A1R3044	321-0315-00		RES,FXD,FILM:18.7K OHM,1%,0.125W,TC=TO	19701	5043ED18K70F
A26A1R3045	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=TO	07716	CEAD12401F
A26A1R3046	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=TO	07716	CEAD12401F
A26A1R3050	315-0510-00		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A26A1R3055	317-0470-00		RES,FXD,CMPSN:47 OHM,5%,0.125W	01121	BB4705
A26A1R3057	317-0470-00		RES,FXD,CMPSN:47 OHM,5%,0.125W	01121	BB4705
A26A1R3058	317-0470-00		RES,FXD,CMPSN:47 OHM,5%,0.125W	01121	BB4705
A26A1R3065	317-0331-00		RES,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A26A1R3070	315-0202-00		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A26A1R3071	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A26A1R3076	317-0472-00		RES,FXD,CMPSN:4.7K OHM,5%,0.125W	01121	BB4725
A26A1R4015	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A26A1R4016	315-0132-00		RES,FXD,FILM:1.3K OHM,5%,0.25W	57668	NTR25J-E01K3
A26A1R4023	315-0271-00		RES,FXD,FILM:270 OHM,5%,0.25W	57668	NTR25J-E270E
A26A1R4024	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A26A1R4027	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A26A1R4038	315-0154-00		RES,FXD,FILM:150K OHM,5%,0.25W	57668	NTR25J-E150K
A26A1R4040	315-0154-00		RES,FXD,FILM:150K OHM,5%,0.25W	57668	NTR25J-E150K
A26A1R4047	315-0154-00		RES,FXD,FILM:150K OHM,5%,0.25W	57668	NTR25J-E150K
A26A1R4049	315-0154-00		RES,FXD,FILM:150K OHM,5%,0.25W	57668	NTR25J-E150K
A26A1R4052	321-0756-00		RES,FXD,FILM:50K OHM,1%,0.125W,TC=TO	24546	NA55D5002F
A26A1R4073	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A26A1R5016	317-0160-00		RES,FXD,CMPSN:16 OHM,5%,0.125W	01121	BB1605
A26A1R5017	317-0160-00		RES,FXD,CMPSN:16 OHM,5%,0.125W	01121	BB1605
A26A1R5020	315-0510-00		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A26A1R5021	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A26A1R5023	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A26A1R5024	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A26A1R5025	315-0223-00		RES,FXD,FILM:22K OHM,5%,0.25W	19701	5043CX22K00J92U
A26A1R5038	315-0154-00		RES,FXD,FILM:150K OHM,5%,0.25W	57668	NTR25J-E150K
A26A1R5039	315-0154-00		RES,FXD,FILM:150K OHM,5%,0.25W	57668	NTR25J-E150K
A26A1R5072	307-0108-00		RES,FXD,CMPSN:6.8 OHM,5%,0.25W	01121	CB68G5
A26A1T4014	120-1509-00		TRANSFORMER,RF:TOROID,257NH TD-419	80009	120-1509-00
A26A1T5022	120-1510-00		TRANSFORMER,RF:TOROID,35.5NH,30% TD-420	80009	120-1510-00
A26A1U2017	156-1248-00		MICROCKT,DGTL:ECL,PRESICALER/DIVIDE BY 100	52648	SP8629
A26A1U2040	156-1272-00		MICROCKT,LINER:DUAL OPERATIONAL AMPLIFIER	80009	156-1272-00
A26A1U3051	156-1862-00		MICROCKT,DGTL:VAR MODULUS DIVIDER 32/33	04713	MC12015(PD/LD)
A26A1U3059	156-0469-02		MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02



Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscort	Name & Description	Mfr. Code	Mfr. Part No.
A26A1U4021	156-1709-00			MICROCKT, LINEAR: IF AMPLIFIER	04713	MC1350P
A26A1U4041	156-1742-00			MICROCKT, LINEAR: CMOS, PLL FREQ SYNTH.	04713	MC145146L
A26A1U4066	156-0058-02			MICROCKT, DGTL: HEX INV, SCRN	80009	156-0058-02
A26A1U4074	156-0388-03			MICROCKT, DGTL: DUAL D FLIP-FLOP, SCRN	80009	156-0388-03
A26A1U5015	156-1248-00			MICROCKT, DGTL: ECL, PRESCALER/DIVIDE BY 100	52648	SP8629
A26A1U5073	156-0277-01			MICROCKT, LINEAR: VOLTAGE RGLTR, POS 5V, SCRN	04713	MC7805CTD
A28	670-7920-01			CIRCUIT BD ASSY: MAIN MOTHER	80009	670-7920-01
A30	621-0016-00	B010100	B010644	POWER SUPPLY:	80009	621-0016-00
A30	621-0016-01	B010645		POWER SUPPLY: (492A ONLY)	80009	621-0016-01
A30	621-0015-00	B010100	B010644	POWER SUPPLY:	80009	621-0015-00
A30	621-0015-01	B010645		POWER SUPPLY: (492AP ONLY)	80009	621-0015-01
A30	621-0018-00	B010100	B010644	POWER SUPPLY:	80009	621-0018-00
A30	621-0018-01	B010645		POWER SUPPLY: (492A OPTION 42 ONLY)	80009	621-0018-01
A30	621-0019-00	B010100	B010644	POWER SUPPLY:	80009	621-0019-00
A30	621-0019-01	B010645		POWER SUPPLY: (492AP OPTION 42 ONLY)	80009	621-0019-01
A30	621-0021-00	B010100	B010378	POWER SPLY ASSY: (492A OPTION 30,31 ONLY)	80009	621-0021-00
A30	621-0021-01	B010379		POWER SPLY ASSY: (492A OPTION 30,31 ONLY)	80009	621-0021-01
A30	621-0020-00	B010100	B010378	POWER SPLY ASSY: (492AP OPTION 30,31 ONLY)	80009	621-0020-00
A30	621-0020-01	B010379		POWER SPLY ASSY: (492AP OPTION 30,31 ONLY)	80009	621-0020-01
A30	621-0032-00	B010100	B010378	POWER SPLY ASSY: (492AP OPTION 31,42 ONLY)	80009	621-0032-00
A30	621-0032-01	B010379		POWER SPLY ASSY: (492AP OPTION 31,42 ONLY)	80009	621-0032-01
A30B100	119-0830-01			FAN, TUBEAXIAL: 12VDC, 2.4W, 5250 RPM, 31 CFM	TK0146	MODEL 69.11.53
A30B200	119-1719-01			FAN, TUBEAXIAL: 12VDC, 4.3W, 2750 RPM (OPTION 30,31,42 ONLY)	TK1409	ORDER BY DESCR
A30C200	290-0845-00			CAP, FXD, ELCTLT: 330UF, +50-10%, 25V (OPTION 30,31,42 ONLY)	54473	ECE-A25V330L
A30CR1	152-0141-02			SEMICONDC DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35 (OPTION 42 ONLY)	03508	DA2527 (1N4152)
A30F301	159-0017-00			FUSE, CARTRIDGE: 3AG, 4A, 250V, FAST BLOW	71400	MTH-CW-4
A30FL301	119-1306-00			FILTER, RFI: 6A, 250V, 50-400HZ	56289	6JX5431A
A30FL302	119-1390-00			FILTER, RFI: POT CORE SET	80009	119-1390-00
A30R1	315-0471-00			RES, FXD, FILM: 470 OHM, 5%, 0.25W (OPTION 42 ONLY)	57668	NTR25J-E470E
A30R301	301-0514-01			RES, FXD, CMPSN: 510K OHM, 5%, 0.5W	01121	EB5145
A30S300	260-1931-00			SWITCH, SENS: SPST NO, 10(4)A, 250V	TK0935	1005.0925
A30S301	260-1931-00			SWITCH, SENS: SPST NO, 10(4)A, 250V	TK0935	1005.0925
A30S302	260-1967-00			SWITCH, SLIDE: DPDT 5A/250V 10A/125V MKD	TK0935	4021.0512
A30U301	119-1168-00			CAPACITOR-RES: 0.1UF, 20% & 22 OHM, 10%, 250VAC	14752	RG1782-1
A30W192	175-9621-00			CABLE ASSY, RF: 50 OHM COAX, 23.5 L (OPTION 42 ONLY)	80009	175-9621-00
A30W301	175-1703-00			LEAD, ELECTRICAL: 22 AWG, 22.5 L	80009	175-1703-00
A30W560	175-3405-00			CA ASSY, SP, ELEC: 28, 26 AWG, 18.0 L (492AP ONLY)	91506	9P28-3S18-2
A30W620	175-3619-01			CABLE ASSY, RF: 50 OHM COAX, 16.0 L, SEMI-RGD	80009	175-3619-01
A30W1011	175-2480-00			CA ASSY, SP, ELEC: 2, 26 AWG, 11.0 L, RIBBON (492AP ONLY)	TK1375	175-2480-00
A30W1021	175-9618-00			CABLE ASSY, RF: 50 OHM COAX, 11.0 L, 9-5 (OPTION 42 ONLY)	80009	175-9618-00
A30W3045	175-3557-00			CA ASSY, SP, ELEC: 5, 26 AWG, 18.0 L, RIBBON	TK1375	175-3557-00
A30A1	670-8036-01	B010100	B010644	CIRCUIT BD ASSY: PWR SPLY	80009	670-8036-01
A30A1	670-8036-04	B010645		CIRCUIT BD ASSY: PWR SPLY	80009	670-8036-04
A30A1C1055	290-0758-00			CAP, FXD, ELCTLT: 2.2UF, +50-10%, 200V	56289	502D227

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A30A1C1063	285-1089-00		CAP, FXD, PLASTIC:0.04UF, 5%, 900V	50558	PA6-0787J
A30A1C1095	285-1196-00		CAP, FXD, PPR DI:0.01UF, 20%, 250V	TK0515	PME 265 MB 510
A30A1C2024	283-0330-00		CAP, FXD, CER DI:100PF, 5%, 50V	05397	C320C101J5R5CA
A30A1C2030	283-0238-00		CAP, FXD, CER DI:0.01UF, 10%, 50V	04222	SR205C103KAA
A30A1C2032	283-0330-00		CAP, FXD, CER DI:100PF, 5%, 50V	05397	C320C101J5R5CA
A30A1C2033	283-0486-00		CAP, FXD, CER DI:1.0UF, 10%, 50V	04222	SR405105K
A30A1C2034	283-0330-00		CAP, FXD, CER DI:100PF, 5%, 50V	05397	C320C101J5R5CA
A30A1C2035	283-0156-00		CAP, FXD, CER DI:1000PF, +80-20%, 200V	04222	SR152E102ZAA
A30A1C2041	290-0758-00		CAP, FXD, ELCTLT:2.2UF, +50-10%, 200V	56289	502D227
A30A1C2043	290-1034-00		CAP, FXD, ELCTLT:330UF, 25V, 20%	TK1424	CEUFM1E331
A30A1C2045	290-0758-00		CAP, FXD, ELCTLT:2.2UF, +50-10%, 200V	56289	502D227
A30A1C2053	290-0758-00		CAP, FXD, ELCTLT:2.2UF, +50-10%, 200V	56289	502D227
A30A1C2057	290-0758-00		CAP, FXD, ELCTLT:2.2UF, +50-10%, 200V	56289	502D227
A30A1C2096	285-1196-00		CAP, FXD, PPR DI:0.01UF, 20%, 250V	TK0515	PME 265 MB 510
A30A1C3031	283-0330-00		CAP, FXD, CER DI:100PF, 5%, 50V	05397	C320C101J5R5CA
A30A1C3033	283-0486-00		CAP, FXD, CER DI:1.0UF, 10%, 50V	04222	SR405105K
A30A1C3034	283-0330-00		CAP, FXD, CER DI:100PF, 5%, 50V	05397	C320C101J5R5CA
A30A1C3035	283-0330-00		CAP, FXD, CER DI:100PF, 5%, 50V	05397	C320C101J5R5CA
A30A1C3036	283-0486-00		CAP, FXD, CER DI:1.0UF, 10%, 50V	04222	SR405105K
A30A1C3037	283-0486-00		CAP, FXD, CER DI:1.0UF, 10%, 50V	04222	SR405105K
A30A1C3041	290-0770-00		CAP, FXD, ELCTLT:100UF, +50-20%, 25VDC	54473	ECE-A25V100L
A30A1C3051	290-0771-00		CAP, FXD, ELCTLT:220UF, +50-10%, 10VDC	55680	ULA1A221TPA2
A30A1C3057	290-0852-00		CAP, FXD, ELCTLT:1UF, +75-10%, 350V	TK1424	CE04W2V010A
A30A1C3064	285-1196-00		CAP, FXD, PPR DI:0.01UF, 20%, 250V	TK0515	PME 265 MB 510
A30A1C3071	285-0981-00		CAP, FXD, PLASTIC:2UF, 10%, 400V	80009	285-0981-00
A30A1C3074	285-1040-00		CAP, FXD, PLASTIC:1200PF, 10%, 4000V	04099	TEK-17A
A30A1C4012	290-0745-00		CAP, FXD, ELCTLT:22UF, +50-20%, 25WVDC	54473	ECE-A25V22L
A30A1C4014	283-0111-00		CAP, FXD, CER DI:0.1UF, 20%, 50V	04222	SR305C104MAA
A30A1C4015	283-0211-00		CAP, FXD, CER DI:0.1UF, 10%, 200V	04222	SR406C104KAA
A30A1C4016	283-0111-00		CAP, FXD, CER DI:0.1UF, 20%, 50V	04222	SR305C104MAA
A30A1C4022	290-0745-00		CAP, FXD, ELCTLT:22UF, +50-20%, 25WVDC	54473	ECE-A25V22L
A30A1C4023	290-0942-00		CAP, FXD, ELCTLT:100UF, +100-10%, 25V	55680	UPA1E101MAH
A30A1C4024	283-0111-00		CAP, FXD, CER DI:0.1UF, 20%, 50V	04222	SR305C104MAA
A30A1C4032	283-0111-00		CAP, FXD, CER DI:0.1UF, 20%, 50V	04222	SR305C104MAA
A30A1C4033	290-0770-00		CAP, FXD, ELCTLT:100UF, +50-20%, 25VDC	54473	ECE-A25V100L
A30A1C4035	290-0745-00		CAP, FXD, ELCTLT:22UF, +50-20%, 25WVDC	54473	ECE-A25V22L
A30A1C4036	283-0111-00		CAP, FXD, CER DI:0.1UF, 20%, 50V	04222	SR305C104MAA
A30A1C4044	290-1034-00		CAP, FXD, ELCTLT:330UF, 25V, 20%	TK1424	CEUFM1E331
A30A1C4046	290-1034-00		CAP, FXD, ELCTLT:330UF, 25V, 20%	TK1424	CEUFM1E331
A30A1C4051	290-1034-00		CAP, FXD, ELCTLT:330UF, 25V, 20%	TK1424	CEUFM1E331
A30A1C4055	290-1034-00		CAP, FXD, ELCTLT:330UF, 25V, 20%	TK1424	CEUFM1E331
A30A1C4082	283-0263-00		CAP, FXD, CER DI:2200PF, 20%, 3000V	59660	828556Y5R0222M
A30A1C5010	283-0008-00		CAP, FXD, CER DI:0.1UF, 20%, 500V	04222	SR507C104MAA
A30A1C5012	290-0758-00		CAP, FXD, ELCTLT:2.2UF, +50-10%, 200V	56289	502D227
A30A1C5017	283-0486-00		CAP, FXD, CER DI:1.0UF, 10%, 50V	04222	SR405105K
A30A1C5018	290-1034-00		CAP, FXD, ELCTLT:330UF, 25V, 20%	TK1424	CEUFM1E331
A30A1C5021	283-0111-00		CAP, FXD, CER DI:0.1UF, 20%, 50V	04222	SR305C104MAA
A30A1C5022	290-0745-00		CAP, FXD, ELCTLT:22UF, +50-20%, 25WVDC	54473	ECE-A25V22L
A30A1C5038	285-0699-00		CAP, FXD, PLASTIC:0.0047UF, 10%, 100V	80009	285-0699-00
A30A1C5051	290-1034-00		CAP, FXD, ELCTLT:330UF, 25V, 20%	TK1424	CEUFM1E331
A30A1C5054	290-1034-00		CAP, FXD, ELCTLT:330UF, 25V, 20%	TK1424	CEUFM1E331
A30A1C5071	283-0111-00		CAP, FXD, CER DI:0.1UF, 20%, 50V	04222	SR305C104MAA
A30A1C5072	290-0804-00		CAP, FXD, ELCTLT:10UF, +50-20%, 25V	55680	ULB1E100TAAANA
A30A1C5082	283-0263-00		CAP, FXD, CER DI:2200PF, 20%, 3000V	59660	828556Y5R0222M
A30A1C5084	290-0114-00		CAP, FXD, ELCTLT:47UF, 20%, 6V	05397	T110B476M006AS
A30A1C5085	290-0114-00		CAP, FXD, ELCTLT:47UF, 20%, 6V	05397	T110B476M006AS
A30A1C5113	283-0211-00		CAP, FXD, CER DI:0.1UF, 10%, 200V	04222	SR406C104KAA
A30A1C6010	283-0111-00		CAP, FXD, CER DI:0.1UF, 20%, 50V	04222	SR305C104MAA

Component No.	Tektronix		Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
	Part No.	Effective	Dscont				
A30A1C6019	283-0486-00				CAP, FXD, CER DI:1.0UF, 10%, 50V	04222	SR405105K
A30A1C6025	290-0523-00				CAP, FXD, ELCTLT:2.2UF, 20%, 20V	05397	T368A225M020AS
A30A1C6033	283-0486-00				CAP, FXD, CER DI:1.0UF, 10%, 50V	04222	SR405105K
A30A1C6039	283-0204-00				CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A30A1C6048	285-1301-00				CAP, FXD, PLASTIC:0.47UF, 10%, 63V	55112	168/0.47/K/50/E
A30A1C6053	285-1301-00				CAP, FXD, PLASTIC:0.47UF, 10%, 63V	55112	168/0.47/K/50/E
A30A1C6055	283-0620-00				CAP, FXD, MICA DI:470PF, 1%, 500V	00853	D155F471F0
A30A1C6058	283-0620-00				CAP, FXD, MICA DI:470PF, 1%, 500V	00853	D155F471F0
A30A1C6059	283-0111-00				CAP, FXD, CER DI:0.1UF, 20%, 50V	04222	SR305C104MAA
A30A1C6062	285-1301-00				CAP, FXD, PLASTIC:0.47UF, 10%, 63V	55112	168/0.47/K/50/E
A30A1C6068	285-1301-00				CAP, FXD, PLASTIC:0.47UF, 10%, 63V	55112	168/0.47/K/50/E
A30A1C6069	283-0204-00				CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A30A1C6071	283-0067-00				CAP, FXD, CER DI:0.001UF, 10%, 200V	59660	835-515-YSE0102K
A30A1C6072	283-0067-00				CAP, FXD, CER DI:0.001UF, 10%, 200V	59660	835-515-YSE0102K
A30A1C6101	290-0829-00				CAP, FXD, ELCTLT:750UF, +100-10%, 200V	90201	PPF751SR2J3P2
A30A1C6111	290-0829-00				CAP, FXD, ELCTLT:750UF, +100-10%, 200V	90201	PPF751SR2J3P2
A30A1CR1022	152-0400-00				SEMICON DVC, DI:RECT, SI, 400V, 1A	04713	1N4936RL
A30A1CR1034	152-0400-00				SEMICON DVC, DI:RECT, SI, 400V, 1A	04713	1N4936RL
A30A1CR1042	152-0400-00				SEMICON DVC, DI:RECT, SI, 400V, 1A	04713	1N4936RL
A30A1CR2027	152-0141-02				SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A30A1CR2028	152-0141-02				SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A30A1CR2035	152-0141-02				SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A30A1CR2061	152-0661-00				SEMICON DVC, DI:RECT, SI, 600V, 3A	04713	SR3523
A30A1CR2063	152-0661-00				SEMICON DVC, DI:RECT, SI, 600V, 3A	04713	SR3523
A30A1CR2065	152-0661-00				SEMICON DVC, DI:RECT, SI, 600V, 3A	04713	SR3523
A30A1CR2079	152-0661-00				SEMICON DVC, DI:RECT, SI, 600V, 3A	04713	SR3523
A30A1CR3027	152-0141-02				SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A30A1CR3028	152-0141-02				SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A30A1CR3035	152-0141-02				SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A30A1CR3052	152-0400-00				SEMICON DVC, DI:RECT, SI, 400V, 1A	04713	1N4936RL
A30A1CR3053	152-0400-00				SEMICON DVC, DI:RECT, SI, 400V, 1A	04713	1N4936RL
A30A1CR3054	152-0400-00				SEMICON DVC, DI:RECT, SI, 400V, 1A	04713	1N4936RL
A30A1CR3055	152-0400-00				SEMICON DVC, DI:RECT, SI, 400V, 1A	04713	1N4936RL
A30A1CR3056	152-0400-00				SEMICON DVC, DI:RECT, SI, 400V, 1A	04713	1N4936RL
A30A1CR3096	152-0661-00				SEMICON DVC, DI:RECT, SI, 600V, 3A	04713	SR3523
A30A1CR3098	152-0661-00				SEMICON DVC, DI:RECT, SI, 600V, 3A	04713	SR3523
A30A1CR4021	152-0066-00				SEMICON DVC, DI:RECT, SI, 400V, 1A, DO-41	05828	GP10G-020
A30A1CR4034	152-0066-00				SEMICON DVC, DI:RECT, SI, 400V, 1A, DO-41	05828	GP10G-020
A30A1CR4037	152-0066-00				SEMICON DVC, DI:RECT, SI, 400V, 1A, DO-41	05828	GP10G-020
A30A1CR4053	152-0640-00				SEMICON DVC, DI:RECT, SI, 35V, 30A, DO-4	01281	SD-4101
A30A1CR4057	152-0640-00				SEMICON DVC, DI:RECT, SI, 35V, 30A, DO-4	01281	SD-4101
A30A1CR4061	152-0720-00				SEMICON DVC, DI:RECT, SI, 100V, 8A, 25NS, TO-220, BYW29-100	25403	BYW29-100
A30A1CR4062	152-0720-00				SEMICON DVC, DI:RECT, SI, 100V, 8A, 25NS, TO-220, BYW29-100	25403	BYW29-100
A30A1CR4063	152-0720-00				SEMICON DVC, DI:RECT, SI, 100V, 8A, 25NS, TO-220, BYW29-100	25403	BYW29-100
A30A1CR4065	152-0720-00				SEMICON DVC, DI:RECT, SI, 100V, 8A, 25NS, TO-220, BYW29-100	25403	BYW29-100
A30A1CR4094	152-0661-00				SEMICON DVC, DI:RECT, SI, 600V, 3A	04713	SR3523
A30A1CR4095	152-0661-00				SEMICON DVC, DI:RECT, SI, 600V, 3A	04713	SR3523
A30A1CR5031	152-0141-02				SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	CA2527 (1N4152)
A30A1CR5052	152-0721-00				SEMICON DVC, DI:RECT, SI, 100V, 12A, DO-4	12969	UTG5206
A30A1CR5055	152-0742-00				SEMICON DVC, DI:RECT, SI, 12A, 100V, DO-4	28480	5082-0008
A30A1CR5062	152-0721-00				SEMICON DVC, DI:RECT, SI, 100V, 12A, DO-4	12969	UTG5206
A30A1CR5065	152-0742-00				SEMICON DVC, DI:RECT, SI, 12A, 100V, DO-4	28480	5082-0008
A30A1CR6014	152-0141-02				SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A30A1CR6015	152-0141-02				SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A30A1CR6016	152-0066-00		SEMICON DVC,DI:RECT,SI,400V,1A,DO-41	05828	GP10G-020
A30A1CR6018	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR6047	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR6049	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR6052	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR6053	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR6055	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR6061	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR6071	152-0400-00		SEMICON DVC,DI:RECT,SI,400V,1A	04713	1N4936RL
A30A1CR6072	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR6073	152-0400-00		SEMICON DVC,DI:RECT,SI,400V,1A	04713	1N4936RL
A30A1CR6074	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1DS5112	150-0035-00		LAMP,GLOW:90V MAX,0.3MA,AID-T,WIRE LD	TK0213	JH005/3011JA
A30A1E1094	119-0181-00		ARSR,ELEC SURGE:230,GAS FILLED	25088	B1-A230
A30A1E2095	119-0181-00		ARSR,ELEC SURGE:230,GAS FILLED	25088	B1-A230
A30A1F1013	159-0025-00		FUSE,CARTRIDGE:3AG,0.5A,250V,0.25SEC	71400	AGC-CW-1/2
A30A1F1017	159-0021-00		FUSE,CARTRIDGE:3AG,2A,250V,FAST BLOW	71400	AGC-CW-2
A30A1F1033	159-0213-00		FUSE,CARTRIDGE:0.062A,250V,FAST BLOW	71400	1/16A
A30A1F1035	159-0028-00		FUSE,CARTRIDGE:0.25A,250V,FAST BLOW	71400	AGC-1/4
A30A1F2013	159-0021-00		FUSE,CARTRIDGE:3AG,2A,250V,FAST BLOW	71400	AGC-CW-2
A30A1F3038	159-0128-00		FUSE,WIRE LEAD:2A,125V,5 SEC AXIAL LEADS	75915	273002
A30A1J5041	131-2324-00		CONN,RCPT,ELEC:CKT BD,20/40 CONT,FEMALE	31781	307-040-526-300
A30A1L1051	108-0960-00		COIL,RF:FIXED,3.9MH	80009	108-0960-00
A30A1L1081	108-1052-00		COIL,RF:FIXED,580UH	80009	108-1052-00
A30A1L2048	108-0959-00		COIL,RF:FIXED,150UH	TK1345	108-0959-00
A30A1L3012	108-0795-00		COIL,RF:FIXED,2MH	TK1345	108-0795-00
A30A1L3043	108-0959-00		COIL,RF:FIXED,150UH	TK1345	108-0959-00
A30A1L3047	108-0958-00		COIL,RF:FIXED,50UH	80009	108-0958-00
A30A1L3088	108-0961-00		COIL,RF:FIXED,140NH	80009	108-0961-00
A30A1L4042	108-0958-00		COIL,RF:FIXED,50UH	80009	108-0958-00
A30A1Q2021	151-0625-00		TRANSISTOR:PNP,SI,TO-220	80009	151-0625-00
A30A1Q2023	151-0710-00		TRANSISTOR:NPN,SI,TO-92 PLUS	04713	MPSW01A
A30A1Q2024	151-0625-00		TRANSISTOR:PNP,SI,TO-220	80009	151-0625-00
A30A1Q2031	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A30A1Q2061	151-0703-00		TRANSISTOR:NPN,SI,TO-61	80009	151-0703-00
A30A1Q2071	151-0703-00		TRANSISTOR:NPN,SI,TO-61	80009	151-0703-00
A30A1Q3022	151-0625-00		TRANSISTOR:PNP,SI,TO-220	80009	151-0625-00
A30A1Q3023	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A30A1Q5013	151-0622-00		TRANSISTOR:PNP,SI,40V,1A,TO-226AE/237	04713	SPS8956(MPSW51A)
A30A1Q5023	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A30A1Q5032	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A30A1Q6034	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A30A1Q6077	151-0444-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS797
A30A1Q6078	151-0444-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS797
A30A1R2015	308-0643-00		RES,FXD,ww:0.10 OHM,3%,3W	14193	SA31 R100H
A30A1R2017	308-0680-00		RES,FXD,ww:0.045 OHM,10%,3W	00213	1240S-.045-10
A30A1R2022	315-0562-00		RES,FXD,FILM:5.6K OHM,5%,0.25W	57668	NTR25J-E05K6
A30A1R2025	315-0122-00		RES,FXD,FILM:1.2K OHM,5%,0.25W	57668	NTR25J-E01K2
A30A1R2026	321-0399-00		RES,FXD,FILM:140K OHM,1%,0.125W,TC=TO	07716	CEAD14002F
A30A1R2030	315-0242-00		RES,FXD,FILM:2.4K OHM,5%,0.25W	57668	NTR25J-E02K4
A30A1R2031	307-0106-00		RES,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB 47G5
A30A1R2032	321-0193-00		RES,FXD,FILM:1K OHM,1%,0.125W,TC=TO	19701	5033ED1K00F
A30A1R2034	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A30A1R2035	315-0621-00		RES,FXD,FILM:620 OHM,5%,0.25W	57668	NTR25J-E620E
A30A1R2036	321-0289-07		RES,FXD,FILM:10.0K OHM,0.1%,0.125W,TC=T9	19701	5033RE10K00B
A30A1R2037	321-0318-07		RES,FXD,FILM:20.0K OHM,0.1%,0.125W,TC=T9	19701	5033RE20K00BCM
A30A1R2038	321-0381-00		RES,FXD,FILM:90.9K OHM,1%,0.125W,TC=TO	07716	CEAD90901F
A30A1R2039	321-0347-00		RES,FXD,FILM:40.2K OHM,1%,0.125W,TC=TO	91637	CMF55116640201F

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discnt	Name & Description	Mfr. Code	Mfr. Part No.
A30A1R2057	315-0105-00			RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A30A1R2073	315-0105-00			RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A30A1R3019	308-0463-00			RES,FXD,Ww:0.3 OHM,1%,3W	14193	SA31-R300F
A30A1R3021	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A30A1R3022	307-0106-00			RES,FXD,CMPNS:4.7 OHM,5%,0.25W	01121	CB 47G5
A30A1R3023	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A30A1R3024	301-0102-00			RES,FXD,CMPNS:1K OHM,5%,0.50W	19701	5053CX1K000J
A30A1R3025	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A30A1R3026	315-0271-00			RES,FXD,FILM:270 OHM,5%,0.25W	57668	NTR25J-E270E
A30A1R3029	307-0106-00			RES,FXD,CMPNS:4.7 OHM,5%,0.25W	01121	CB 47G5
A30A1R3031	321-0377-00			RES,FXD,FILM:82.5K OHM,1%,0.125W,TC=TO	07716	CEAD82501F
A30A1R3032	321-0193-00			RES,FXD,FILM:1K OHM,1%,0.125W,TC=TO	19701	5033ED1K00F
A30A1R3033	307-0106-00			RES,FXD,CMPNS:4.7 OHM,5%,0.25W	01121	CB 47G5
A30A1R3034	321-0378-00	B010100	B010644	RES,FXD,FILM:84.5K OHM,1%,0.125W,TC=TO	07716	CEAD84501F
A30A1R3034	321-0367-00	B010645		RES,FXD,FILM:64.9K OHM,1%,0.125W,TC=TO	07716	CEAD64901F
A30A1R3036	321-0193-00			RES,FXD,FILM:1K OHM,1%,0.125W,TC=TO	19701	5033ED1K00F
A30A1R3037	321-0604-00			RES,FXD,FILM:30K OHM,0.25%,0.125W,TC=T2	19701	5033RC30K00C
A30A1R3038	321-0344-00	B010100	B010644	RES,FXD,FILM:37.4K OHM,1%,0.125W,TC=TO	19701	5033ED 37K40F
A30A1R3038	321-0353-00	B010645		RES,FXD,FILM:46.4K OHM,1%,0.125W,TC=TO	07716	CEAD46401F
A30A1R3039	321-0289-03			RES,FXD,FILM:10.0K OHM,0.25%,0.125W,TC=T2	07716	CEAC10001C
A30A1R3084	303-0271-00			RES,FXD,CMPNS:270 OHM,5%,1W	01121	GB2715
A30A1R3088	301-0823-00			RES,FXD,FILM:82K OHM,5%,0.5W	19701	5053CX82K00J
A30A1R4017	301-0823-00			RES,FXD,FILM:82K OHM,5%,0.5W	19701	5053CX82K00J
A30A1R4018	301-0165-00			RES,FXD,FILM:1.6M OHM,5%,0.5W	57668	TR50J-E 1M6
A30A1R4031	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A30A1R4083	315-0471-00			RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A30A1R4092	308-0054-00			RES,FXD,Ww:10K OHM,5%,5W	00213	1550S-10000-5
A30A1R5014	321-0193-00			RES,FXD,FILM:1K OHM,1%,0.125W,TC=TO	19701	5033ED1K00F
A30A1R5015	321-0385-00			RES,FXD,FILM:100K OHM,1%,0.125W,TC=TO	19701	5033ED100K0F
A30A1R5016	307-0103-00			RES,FXD,CMPNS:2.7 OHM,5%,0.25W	01121	CB27G5
A30A1R5019	315-0362-00			RES,FXD,FILM:3.6K OHM,5%,0.25W	19701	5043CX3K600J
A30A1R5033	315-0182-00			RES,FXD,FILM:1.8K OHM,5%,0.25W	57668	NTR25J-E1K8
A30A1R5034	315-0222-00			RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A30A1R5035	315-0622-00			RES,FXD,FILM:6.2K OHM,5%,0.25W	19701	5043CX6K200J
A30A1R5036	321-0381-00			RES,FXD,FILM:90.9K OHM,1%,0.125W,TC=TO	07716	CEAD90901F
A30A1R5039	301-0102-00			RES,FXD,CMPNS:1K OHM,5%,0.50W	19701	5053CX1K000J
A30A1R5042	315-0512-00			RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A30A1R5042	315-0332-00			RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A30A1R5043	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A30A1R5047	321-0373-00			RES,FXD,FILM:75.0K OHM,1%,0.125W,TC=TO	19701	5033ED75K00F
A30A1R5083	307-0023-00			RES,FXD,CMPNS:4.7 OHM,10%,0.5W	01121	EB47G1
A30A1R5086	307-0023-00			RES,FXD,CMPNS:4.7 OHM,10%,0.5W	01121	EB47G1
A30A1R5087	308-0154-00			RES,FXD,Ww:25K OHM,5%,10W	44655	10EX25K00JQ54
A30A1R5111	301-0565-00			RES,FXD,FILM:5.6M OHM,5%,0.05W	01121	EB5655
A30A1R6011	321-0289-00			RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A30A1R6013	307-0106-00			RES,FXD,CMPNS:4.7 OHM,5%,0.25W	01121	CB 47G5
A30A1R6017	307-0106-00			RES,FXD,CMPNS:4.7 OHM,5%,0.25W	01121	CB 47G5
A30A1R6019	321-0289-03			RES,FXD,FILM:10.0K OHM,0.25%,0.125W,TC=T2	07716	CEAC10001C
A30A1R6020	321-0183-00			RES,FXD,FILM:787 OHM,1%,0.125W,TC=TO	07716	CEAD787R0F
A30A1R6021	315-0361-00			RES,FXD,FILM:360 OHM,5%,0.25W	19701	5043CX360R0J
A30A1R6022	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A30A1R6023	321-0227-00			RES,FXD,FILM:2.26K OHM,1%,0.125W,TC=TO	01121	RNK2261F
A30A1R6024	321-0289-03			RES,FXD,FILM:10.0K OHM,0.25%,0.125W,TC=T2	07716	CEAC10001C
A30A1R6028	311-1489-00			RES,VAR,NONWw:500 OHM,10%,0.75W	02111	43P501T672
A30A1R6029	321-0114-00			RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150R0F
A30A1R6032	321-0317-00			RES,FXD,FILM:19.6K OHM,1%,0.125W,TC=TO	07716	CEAD19601F
A30A1R6033	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A30A1R6035	315-0105-00			RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Dscont			
A30A1R6037	321-0816-00			RES,FXD,FILM:5K OHM,1%,0.125W,TC=TO	24546	NA55D5001F
A30A1R6038	321-0299-00			RES,FXD,FILM:12.7K OHM,1%,0.125W,TC=TO	19701	5033ED12K70F
A30A1R6040	315-0302-00			RES,FXD,FILM:3K OHM,5%,0.25W	57668	NTR25J-E03K0
A30A1R6041	315-0512-00			RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A30A1R6045	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A30A1R6046	315-0820-00			RES,FXD,FILM:82 OHM,5%,0.25W	57668	NTR25J-E82E0
A30A1R6048	321-0337-00			RES,FXD,FILM:31.6K OHM,1%,0.125W,TC=TO	07716	CEAD31601F
A30A1R6052	321-0250-00			RES,FXD,FILM:3.92K OHM,1%,0.125W,TC=TO	07716	CEAD39200F
A30A1R6056	321-0337-00			RES,FXD,FILM:31.6K OHM,1%,0.125W,TC=TO	07716	CEAD31601F
A30A1R6057	321-0321-00			RES,FXD,FILM:21.5K OHM,1%,0.125W,TC=TO	07716	CEAD21501F
A30A1R6058	321-0230-00			RES,FXD,FILM:2.43K OHM,1%,0.125W,TC=TO	19701	5043ED2K430F
A30A1R6061	311-0644-00			RES,VAR, NONWW: TRMR, 20K OHM, 0.5W	32997	3329H-G48-203
A30A1R6063	315-0205-00			RES,FXD,FILM:2M OHM,5%,0.25W	01121	CB2055
A30A1R6073	315-0122-00			RES,FXD,FILM:1.2K OHM,5%,0.25W	57668	NTR25J-E01K2
A30A1R6074	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A30A1R6075	315-0122-00			RES,FXD,FILM:1.2K OHM,5%,0.25W	57668	NTR25J-E01K2
A30A1R6076	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A30A1R6091	308-0054-00			RES,FXD,WW:10K OHM,5%,5W	00213	1550S-10000-5
A30A1RT2093	307-0353-00			RES,THERMAL:5 OHM,10%	15454	5DA5R0K270SS-SIL
A30A1RT2097	307-0353-00			RES,THERMAL:5 OHM,10%	15454	5DA5R0K270SS-SIL
A30A1S2103	159-0169-00			FUSE,THERMAL:15A,1200V,104 DEG C	27012	4218A1
A30A1T2080	120-1287-00			TRANSFORMER,RF:TOROID	80009	120-1287-00
A30A1T4071	120-1239-00			XFMR,PWR,SDN&SU:HF	80009	120-1239-00
A30A1T4084	120-0640-00			XFMR,TOROID:	TK1345	120-0640-00
A30A1T6044	120-1350-00			TRANSFORMER,RF:TOROID	80009	120-1350-00
A30A1T6081	120-1234-01			TRANSFORMER,RF:BASE DRIVE	80009	120-1234-01
A30A1U2037	156-0495-02	B010100	B010715	MICROCKT,LINER:QUAD OPNL AMPL,SELECTED	01295	LM324J4
A30A1U2037	156-0495-00	B010716		MICROCKT,LINER:OPNL AMPL	01295	LM324N
A30A1U3036	156-0853-00			MICROCKT,LINER:OPNL AMPL,DUAL	04713	LM358N
A30A1U3093	119-1168-00			CAPACITOR-RES:0.1UF,20% & 22 OHM,10%,250VAC	14752	RG1782-1
A30A1U3103	119-1168-00			CAPACITOR-RES:0.1UF,20% & 22 OHM,10%,250VAC	14752	RG1782-1
A30A1U5043	156-1689-00			CPLR,OPTOELECTR:LED & PHOTOTRANSISTOR,3750V ISOLATION	03508	H11AVX-535
A30A1U6016	156-0853-00			MICROCKT,LINER:OPNL AMPL,DUAL	04713	LM358N
A30A1U6036	156-1126-01			MICROCKT,LINER:VOLTAGE COMPARATOR,SELECTED	01295	LM311JG4
A30A1U6043	156-1162-00			CPLR,OPTOELECTR:LED,2500V	50438	6N136
A30A1U6046	156-1225-00			MICROCKT,LINER:DUAL COMPARATOR	01295	LM393P
A30A1U6053	156-1408-01	B010100	B010179	MICROCKT,LINER:TIMER,SCREENED	01295	TLC555CP3
A30A1U6053	156-1408-00	B010180		MICROCKT,LINER:TIMER,LOW POWER	32293	ITS9217
A30A1U6059	156-1408-01	B010100	B010179	MICROCKT,LINER:TIMER,SCREENED	01295	TLC555CP3
A30A1U6059	156-1408-00	B010180		MICROCKT,LINER:TIMER,LOW POWER	32293	ITS9217
A30A1U6063	156-0366-02			MICROCKT,DGTL:CMOS,DUAL D FLIP-FLOP,SCRN	02735	CD4013BFX
A30A1U6069	156-0793-02			MICROCKT,DGTL:DUAL 4 INPUT NAND GATE,SCRN	04713	MC14012BCLD
A30A1VR3089	152-0405-00			SEMICON DVC,DI:ZEN,SI,15V,5%,1W,TO-41	12954	DZ841205A
A30A1VR5073	152-0149-00			SEMICON DVC,DI:ZEN,SI,10V,5%,0.4W,DO-7	04713	1N961B
A30A1VR6026	152-0486-00			SEMICON DVC,DI:ZEN,SI,6.2V,2%,400MW,DO-35	80009	152-0486-00
A30A2	670-7226-00			CIRCUIT BD ASSY:FAN DRIVE	80009	670-7226-00
A30A2	671-0038-00	B010379		CIRCUIT BD ASSY:RACK MOUNT FAN DRIVER (OPTION 30,31 ONLY)	80009	671-0038-00
A30A2C1010	283-0024-00	B010379		CAP,FXD,CER DI:0.1UF,+80-20%,50V (OPTION 30,31 ONLY)	04222	SR215C104MAA
A30A2C1017	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A30A2C1018	283-0198-00			CAP,FXD,CER DI:0.22UF,20%,50V	05397	C330C224M5U1CA
A30A2C1019	283-0198-00			CAP,FXD,CER DI:0.22UF,20%,50V	05397	C330C224M5U1CA
A30A2C1026	290-0523-00			CAP,FXD,ELCTL:2.2UF,20%,20V	05397	T368A225M020AS
A30A2C1028	290-0523-00			CAP,FXD,ELCTL:2.2UF,20%,20V	05397	T368A225M020AS
A30A2C1032	290-0804-00			CAP,FXD,ELCTL:10UF,+50-20%,25V	55680	ULB1E100TAAANA
A30A2C1033	290-0804-00			CAP,FXD,ELCTL:10UF,+50-20%,25V	55680	ULB1E100TAAANA

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A30A2C2012	290-0804-00		CAP,FXD,ELCTLT:10UF,+50-20%,25V	55680	ULB1E100TAAANA
A30A2C2018	283-0198-00		CAP,FXD,CER DI:0.22UF,20%,50V	05397	C330C224M5U1CA
A30A2C2028	290-0523-00		CAP,FXD,ELCTLT:2.2UF,20%,20V	05397	T368A225M020AS
A30A2CR1025	152-0066-00	B010379	SEMICON DVC,DI:RECT,SI,400V,1A,DO-41 (OPTION 30,31 ONLY)	05828	GP10G-020
A30A2CR1039	152-0066-00		SEMICON DVC,DI:RECT,SI,400V,1A,DO-41	05828	GP10G-020
A30A2CR2010	152-0066-00	B010379	SEMICON DVC,DI:RECT,SI,400V,1A,DO-41 (OPTION 30,31 ONLY)	05828	GP10G-020
A30A2CR2040	152-0066-00		SEMICON DVC,DI:RECT,SI,400V,1A,DO-41	05828	GP10G-020
A30A2L1015	108-0749-00	B010379	COIL,RF:FIXED,1MH (OPTION 30,31 ONLY)	80009	108-0749-00
A30A2Q1010	151-0521-00		SCR:SI,MU-27	02735	C122B1
A30A2Q1018	151-0188-00		TRANSISTOR:P,NP,SI,TO-92	80009	151-0188-00
A30A2Q1020	151-0188-00		TRANSISTOR:P,NP,SI,TO-92	80009	151-0188-00
A30A2Q1025	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A30A2Q1025	151-0334-00	B010379	TRANSISTOR:NPN,SI,TO-126 (OPTION 30,31 ONLY)	80009	151-0334-00
A30A2Q1038	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A30A2Q1044	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A30A2Q2020	151-0188-00		TRANSISTOR:P,NP,SI,TO-92	80009	151-0188-00
A30A2Q2025	151-0334-00		TRANSISTOR:NPN,SI,TO-126	80009	151-0334-00
A30A2Q2025	151-0302-00	B010379	TRANSISTOR:NPN,SI,TO-18 (OPTION 30,31 ONLY)	04713	ST899
A30A2Q2030	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A30A2R1010	315-0270-00	B010379	RES,FXD,FILM:27 OHM,5%,0.25W (OPTION 30,31 ONLY)	19701	5043CX27R00J
A30A2R1011	315-0101-00	B010379	RES,FXD,FILM:100 OHM,5%,0.25W (OPTION 30,31 ONLY)	57668	NTR25J-E 100E
A30A2R1015	315-0270-00		RES,FXD,FILM:27 OHM,5%,0.25W	19701	5043CX27R00J
A30A2R1017	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A30A2R1024	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A30A2R1024	315-0104-00	B010379	RES,FXD,FILM:100K OHM,5%,0.25W (OPTION 30,31 ONLY)	57668	NTR25J-E100K
A30A2R1026	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A30A2R1027	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A30A2R1028	315-0163-00		RES,FXD,FILM:16K OHM,5%,0.25W	57668	NTR25J-E 16K
A30A2R1029	315-0223-00		RES,FXD,FILM:22K OHM,5%,0.25W	19701	5043CX22K00J92U
A30A2R1031	315-0473-00		RES,FXD,FILM:47K OHM,5%,0.25W	57668	NTR25J-E47K0
A30A2R1032	315-0163-00		RES,FXD,FILM:16K OHM,5%,0.25W	57668	NTR25J-E 16K
A30A2R1033	315-0393-00		RES,FXD,FILM:39K OHM,5%,0.25W	57668	NTR25J-E39K0
A30A2R1036	315-0223-00		RES,FXD,FILM:22K OHM,5%,0.25W	19701	5043CX22K00J92U
A30A2R2014	315-0333-00		RES,FXD,FILM:33K OHM,5%,0.25W	57668	NTR25J-E33K0
A30A2R2016	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A30A2R2019	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A30A2R2021	315-0623-00	B010379	RES,FXD,FILM:62K OHM,5%,0.25W (OPTION 30,31 ONLY)	19701	5043CX62K00J
A30A2R2025	307-0472-00	B010379	RES,THERMAL:100K OHM,5%,DISC NTC (OPTION 30,31 ONLY)	15454	07DE104J-220-EC
A30A2R2034	315-0163-00		RES,FXD,FILM:16K OHM,5%,0.25W	57668	NTR25J-E 16K
A30A2R2035	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A30A2R2036	315-0223-00		RES,FXD,FILM:22K OHM,5%,0.25W	19701	5043CX22K00J92U
A30A2R2037	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A30A2R2039	315-0361-00		RES,FXD,FILM:360 OHM,5%,0.25W	19701	5043CX360R0J
A30A2R2042	315-0623-00		RES,FXD,FILM:62K OHM,5%,0.25W	19701	5043CX62K00J
A30A2RT2045	307-0472-00		RES,THERMAL:100K OHM,5%,DISC NTC	15454	07DE104J-220-EC
A30A2VR1010	152-0175-00	B010379	SEMICON DVC,DI:ZEN,SI,5.6V,5%,0.5W,DO-7 (OPTION 30,31 ONLY)	14552	T03810976
A30A2VR1015	152-0175-00		SEMICON DVC,DI:ZEN,SI,5.6V,5%,0.5W,DO-7	14552	T03810976
A30A2VR2025	152-0166-00	B010379	SEMICON DVC,DI:ZEN,SI,6.2V,5%,400MM,DO-7 (OPTION 30,31 ONLY)	04713	SZ11738RL

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A30A2VR2038	152-0166-00			SEMICON DVC,DI:ZEN,SI,6.2V,5%,400MW,DO-7	04713	SZ11738RL
A30A57	670-7913-00			CIRCUIT BD ASSY:GPIB INTERFACE (492AP ONLY)	80009	670-7913-00
A30A57C1011	290-0524-00			CAP,FXD,ELCTLT:4.7UF,20%,10V	05397	T368A475M010AZ
A30A57C1012	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A30A57C1013	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A30A57L1011	108-0836-00			COIL,RF:FIXED,14UH	80009	108-0836-00
A30A57P1011	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A30A57P1012	131-2203-02			CONN,RCPT,ELEC:CKT BD,24 CONT,FEMALE	29587	57-20240-11(398)
A30A57P1013	131-2581-00			CONN,RCPT,ELEC:CKT BD,4 X 7 CONT,FEMALE	91506	528-AG29D
A30A57R1011	317-0103-00			RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A30A57S1011	260-1721-00			SWITCH,ROCKER:8,SPST,125MA,30VDC	81073	76SB08S
A30A57U1011	156-1415-01			MICROCKT,DGTL:OCTAL GPIB XCVR-MANAGEMENT	27014	DS75161A NA+
A30A57U1012	156-1414-02			MICROCKT,DGTL:OCTAL GPIB BUS XCVR,SCRN	27014	DS75160A N
A30A76	670-5558-02			CIRCUIT BD ASSY:RELAY DRIVER	80009	670-5558-02
A30A76C2012	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A30A76C2024	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A30A76C2036	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A30A76C2038	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A30A76CR1013	152-0322-00			SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A30A76J1017	131-1437-00			CONN,RCPT,ELEC:D SER,25 FEM CONT	71468	DB25S-F179
A30A76J1034	131-2323-00			CONN,RCPT,ELEC:CKT BD,12/24 CONT,FEMALE	31781	307-024-526-300
A30A76R1013	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A30A76R2019	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A30A76R2038	315-0472-00			RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A30A76U2015	156-1111-02			MICROCKT,DGTL:OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A30A76U2025	156-1111-02			MICROCKT,DGTL:OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A30A76U2033	156-1111-02			MICROCKT,DGTL:OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A30A76U2038	156-0381-02			MICROCKT,DGTL:QUAD 2-INP EXCL OR GATE	80009	156-0381-02
A32	119-1015-00	B010100	B010589	FILTER,AMPL:110MHZ	80009	119-1015-00
A32	119-1015-01	B010590		FILTER AMPL:110MHZ	80009	119-1015-01
A32C321	281-0825-00			CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A32C323	281-0825-00			CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A32C1054	281-0165-00			CAP,VAR,AIR DI:0.8-10PF,250V	73899	MVM-010W
A32P320	131-0938-00			CONN,RCPT,ELEC:SMB,FEMALE	24931	32JRI25-1
A32P321	131-0938-00			CONN,RCPT,ELEC:SMB,FEMALE	24931	32JRI25-1
A32Q3018	151-0650-00			TRANSISTOR:NPN,SI,TO-39	S0545	2SC1252
A32A1	-----			CIRCUIT BD ASSY:110 IF (PART OF A32)		
A32A1C1012	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A32A1C1022	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A32A1C2010	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A32A1C2012	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A32A1C2029	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A32A1C2035	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A32A1C2036	290-0574-00			CAP,FXD,ELCTLT:47UF,10%,20V	05397	T368C476K0202AS
A32A1C2037	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A32A1C2047	281-0164-00			CAP,VAR,AIR DI:0.6-6PF,250V	73899	MVM-006W
A32A1C2051	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A32A1C3032	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A32A1C3036	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A32A1C3043	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A32A1C3044	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A32A1C3045	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A32A1C4020	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A32A1C4026	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A32A1C4035	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A32A1C4036	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA



Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A32A1C4045	283-0156-00			CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A32A1CR1029	152-0579-00	B010100	B010589	SEMICON DVC,DI:SW,SI,100V,2.5A,A196P	12969	UM6601B
A32A1CR1029	152-0524-00	B010590		SEMICON DVC,DI:SW,SI,100V,0.1A,DO-35	28480	5082-1779
A32A1CR3030	152-0579-00	B010100	B010589	SEMICON DVC,DI:SW,SI,100V,2.5A,A196P	12969	UM6601B
A32A1CR3030	152-0524-00	B010590		SEMICON DVC,DI:SW,SI,100V,0.1A,DO-35	28480	5082-1779
A32A1E3036	276-0507-00			SHLD BEAD,ELEK:FERRITE	02114	56-590-65B/3B
A32A1E4046	276-0507-00			SHLD BEAD,ELEK:FERRITE	02114	56-590-65B/3B
A32A1E4053	276-0569-00	B010590		CORE,EM:TOROID,FERRITE	28733	T1 20606-C2050
A32A1L1039	108-0395-00			COIL,RF:FIXED,64UH	80009	108-0395-00
A32A1L2044	108-0956-00			COIL,RF:FIXED	80009	108-0956-00
A32A1Q4037	151-0650-00			TRANSISTOR:NPN,SI,TO-39	S0545	2SC1252
A32A1Q4053	151-0650-00			TRANSISTOR:NPN,SI,TO-39	S0545	2SC1252
A32A1R1012	301-0330-00			RES,FXD,FILM:33 OHM,5%,0.5W	19701	5053CX33R00J
A32A1R1015	311-1281-00			RES,VAR,NONW:TRMR,2.5K OHM,0.5W	32997	33295-L58-252
A32A1R2014	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A32A1R2019	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A32A1R2028	321-0210-00			RES,FXD,FILM:1.50K OHM,1%,0.125W,TC=TO	19701	5033ED1K50F
A32A1R2029	321-0289-00			RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A32A1R2030	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A32A1R2032	317-0510-00			RES,FXD,CMPNS:51 OHM,5%,0.125W	01121	BB5105
A32A1R2038	317-0180-00			RES,FXD,CMPNS:18 OHM,5%,0.125W	01121	BB1805
A32A1R2039	317-0301-00			RES,FXD,CMPNS:300 OHM,5%,0.125W	01121	BB3015
A32A1R2043	317-0301-00			RES,FXD,CMPNS:300 OHM,5%,0.125W	01121	BB3015
A32A1R3014	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A32A1R3029	317-0510-00			RES,FXD,CMPNS:51 OHM,5%,0.125W	01121	BB5105
A32A1R3035	321-0239-00			RES,FXD,FILM:3.01K OHM,1%,0.125W,TC=TO	19701	5043ED3K010F
A32A1R3042	315-0271-00			RES,FXD,FILM:270 OHM,5%,0.25W	57668	NTR25J-E270E
A32A1R4012	301-0330-00			RES,FXD,FILM:33 OHM,5%,0.5W	19701	5053CX33R00J
A32A1R4018	315-0681-00			RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A32A1R4029	307-0113-00			RES,FXD,CMPNS:5.1 OHM,5%,0.25W	01121	CB51G5
A32A1R4030	315-0222-00			RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A32A1R4032	315-0681-00			RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A32A1R4038	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A32A1R4039	315-0222-00			RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A32A1R4043	315-0221-00			RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A32A1R4047	315-0681-00			RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A32A1R4058	315-0241-00			RES,FXD,FILM:240 OHM,5%,0.25W	19701	5043CX240R0J
A32A1T2020	120-0902-00			XFMR,TOROID:	80009	120-0902-00
A32A1T3041	120-1235-00			TRANSFORMER,RF:BALUN	80009	120-1235-00
A32A1T3054	120-1235-00			TRANSFORMER,RF:BALUN	80009	120-1235-00
A34	119-2008-00			OSC/MIXER ASSY:3RD CONVERTER	80009	119-2008-00
A34C341	281-0697-00			CAP,FXD,CER DI:5000PF,+100-0%,100V	72982	2425-003W5W0502Z
A34C342	281-0697-00			CAP,FXD,CER DI:5000PF,+100-0%,100V	72982	2425-003W5W0502Z
A34C343	281-0697-00			CAP,FXD,CER DI:5000PF,+100-0%,100V	72982	2425-003W5W0502Z
A34C344	281-0697-00			CAP,FXD,CER DI:5000PF,+100-0%,100V	72982	2425-003W5W0502Z
A34P340	131-0951-01			CONN,RCPT,ELEC:SNAP-ON,MALE	98291	051-051-0329-220
A34P341	131-0951-01			CONN,RCPT,ELEC:SNAP-ON,MALE	98291	051-051-0329-220
A34P342	131-0951-01			CONN,RCPT,ELEC:SNAP-ON,MALE	98291	051-051-0329-220
A34P344	131-0951-01			CONN,RCPT,ELEC:SNAP-ON,MALE	98291	051-051-0329-220
A34P346	131-0951-01			CONN,RCPT,ELEC:SNAP-ON,MALE	98291	051-051-0329-220
A34P347	131-0951-01			CONN,RCPT,ELEC:SNAP-ON,MALE	98291	051-051-0329-220
A34U1017	156-0872-02			MICROCKT,LINER:VOLTAGE RGLTR,SCREENED	80009	156-0872-02
A34U1025	156-0285-01			MICROCKT,LINER:VOLTAGE REGULATOR,CHK	04713	MC7812CTD
A34A1	-----			CIRCUIT BD ASSY:3RD CONVERTER (PART OF A34)		
A34A1C1026	283-0347-00			CAP,FXD,CER DI:68PF,5%,100V	72982	8121A108P3K680J
A34A1C1038	281-0165-00			CAP,VAR,AIR DI:0.8-10PF,250V	73899	MVM-010W
A34A1C1044	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA

Replaceable Electrical Parts  
492A/492AP Service Vol. 2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A34A1C1049	283-0191-00		CAP, FXD, CER DI: 0.022UF, 20%, 50V	04222	SR205C223MAA
A34A1C2011	283-0223-00		CAP, FXD, CER DI: 3PF, +/-5PF, 50V	TK0679	TC501-NPO-309D
A34A1C2021	283-0347-00		CAP, FXD, CER DI: 68PF, 5%, 100V	72982	8121A108P3K680J
A34A1C2022	283-0223-00		CAP, FXD, CER DI: 3PF, +/-5PF, 50V	TK0679	TC501-NPO-309D
A34A1C2023	283-0223-00		CAP, FXD, CER DI: 3PF, +/-5PF, 50V	TK0679	TC501-NPO-309D
A34A1C2033	283-0191-00		CAP, FXD, CER DI: 0.022UF, 20%, 50V	04222	SR205C223MAA
A34A1C2039	283-0107-00		CAP, FXD, CER DI: 51PF, 5%, 200V	04222	SR206A510JAA
A34A1C2041	283-0168-00		CAP, FXD, CER DI: 12PF, 5%, 100V	04222	SR151A120JAA
A34A1C2042	283-0140-00		CAP, FXD, CER DI: 4.7PF, +/-0.25PF, 50V	72982	8101E003A479C
A34A1C2044	283-0191-00		CAP, FXD, CER DI: 0.022UF, 20%, 50V	04222	SR205C223MAA
A34A1C2046	283-0191-00		CAP, FXD, CER DI: 0.022UF, 20%, 50V	04222	SR205C223MAA
A34A1C3022	290-0804-00		CAP, FXD, ELCTLT: 10UF, +50-20%, 25V	55680	ULB1E100TAAANA
A34A1C3036	283-0203-00		CAP, FXD, CER DI: 0.47UF, 20%, 50V	04222	SR305SC474MAA
A34A1C3041	283-0203-00		CAP, FXD, CER DI: 0.47UF, 20%, 50V	04222	SR305SC474MAA
A34A1C3046	283-0191-00		CAP, FXD, CER DI: 0.022UF, 20%, 50V	04222	SR205C223MAA
A34A1C3055	290-0804-00		CAP, FXD, ELCTLT: 10UF, +50-20%, 25V	55680	ULB1E100TAAANA
A34A1CR3039	152-0650-00		SEMICONDCVC, DI: VVC, 30V, 11.5PF, A276	50101	U11-4101
A34A1L1041	108-1129-00		COIL, RF: FIXED, 100MH	80009	108-1129-00
A34A1L2022	108-0606-00		COIL, RF: FIXED, 31NH	80009	108-0606-00
A34A1L2023	108-0606-00		COIL, RF: FIXED, 31NH	80009	108-0606-00
A34A1L2052	108-0436-00		COIL, RF: FIXED, 240UH ON FORM	80009	108-0436-00
A34A1L3041	108-1161-00		COIL, RF: FXD, 175NH	80009	108-1161-00
A34A1Q2038	151-0282-00		TRANSISTOR: NPN, SI, TO-72	04713	SRF2625
A34A1Q2041	151-0282-00		TRANSISTOR: NPN, SI, TO-72	04713	SRF2625
A34A1Q2042	151-0282-00		TRANSISTOR: NPN, SI, TO-72	04713	SRF2625
A34A1R1011	321-1068-07		RES, FXD, FILM: 50.5 OHM, 0.1%, 0.125W, TC=T9	57668	RB14 BZE 50E5
A34A1R1021	321-0306-00		RES, FXD, FILM: 15.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED15J00F
A34A1R1022	321-0243-00		RES, FXD, FILM: 3.32K OHM, 1%, 0.125W, TC=TO	19701	5033ED3K32F
A34A1R1024	317-0302-00		RES, FXD, CMPSN: 3K OHM, 5%, 0.125W	01121	BB3025
A34A1R1041	311-1261-00		RES, VAR, NONW: TRMR, 500 OHM, 0.5W	32997	3329P-L58-501
A34A1R1042	321-0960-07		RES, FXD, FILM: 513 OHM, 0.1%, 0.125W, TC=T9	24546	NE55E5130B
A34A1R1043	321-0239-03		RES, FXD, FILM: 3.01K OHM, 0.25%, 0.125W, TC=T2	19701	5033RC3K01C
A34A1R1044	317-0100-00		RES, FXD, CMPSN: 10 OHM, 5%, 0.125W	01121	BB1005
A34A1R1045	317-0201-00		RES, FXD, CMPSN: 200 OHM, 5%, 0.125W	01121	BB2015
A34A1R1048	317-0201-00		RES, FXD, CMPSN: 200 OHM, 5%, 0.125W	01121	BB2015
A34A1R1051	315-0132-00		RES, FXD, FILM: 1.3K OHM, 5%, 0.25W	57668	NTR25J-E01K3
A34A1R2011	321-0193-07		RES, FXD, FILM: 1K OHM, 0.1%, 0.125W, TC=T9	19701	5033RE1K000B
A34A1R2038	317-0680-00		RES, FXD, CMPSN: 68 OHM, 5%, 0.125W	01121	BB6805
A34A1R2042	317-0750-00		RES, FXD, CMPSN: 75 OHM, 5%, 0.125W	01121	BB7505
A34A1R2044	315-0911-00		RES, FXD, FILM: 910 OHM, 5%, 0.25W	57668	NTR25J-E910E
A34A1R2045	317-0201-00		RES, FXD, CMPSN: 200 OHM, 5%, 0.125W	01121	BB2015
A34A1R2046	317-0201-00		RES, FXD, CMPSN: 200 OHM, 5%, 0.125W	01121	BB2015
A34A1R2047	317-0750-00		RES, FXD, CMPSN: 75 OHM, 5%, 0.125W	01121	BB7505
A34A1R3031	317-0201-00		RES, FXD, CMPSN: 200 OHM, 5%, 0.125W	01121	BB2015
A34A1R3032	317-0242-00		RES, FXD, CMPSN: 2.4K OHM, 5%, 0.125W	01121	BB2425
A34A1R3034	317-0103-00		RES, FXD, CMPSN: 10K OHM, 5%, 0.125W	01121	BB1035
A34A1R3035	317-0103-00		RES, FXD, CMPSN: 10K OHM, 5%, 0.125W	01121	BB1035
A34A1R3041	317-0103-00		RES, FXD, CMPSN: 10K OHM, 5%, 0.125W	01121	BB1035
A34A1R3042	317-0103-00		RES, FXD, CMPSN: 10K OHM, 5%, 0.125W	01121	BB1035
A34A1R3044	315-0911-00		RES, FXD, FILM: 910 OHM, 5%, 0.25W	57668	NTR25J-E910E
A34A1R3046	317-0220-00		RES, FXD, CMPSN: 22 OHM, 5%, 0.125W	01121	BB2205
A34A1U2022	155-0285-00		MICROCKT, DGTL: CALIBRATOR	80009	155-0285-00
A34A1U3031	155-0287-00		MICROCKT, DGTL: DISTRIBUTION AMPLIFIER	80009	155-0287-00
A34A1U3051	155-0286-00		MICROCKT, DGTL: MIXER	80009	155-0286-00
A34A1VR1051	152-0456-00		SEMICONDCVC, DI: ZEN, SI, 6.2V, 5%, 0.4W, DO-7	04713	1N827
A34A1Y3038	158-0258-00		XTAL UNIT, QTZ: 100MHZ, 5PPM, -15 TO +75 DEG	00809	HC-35/U
A34A2	-----		CIRCUIT BD ASSY: 100MHZ OSC REGULATOR (PART OF A34)		

Component No.	Tektronix		Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
	Part No.	Effective	Dscnt				
A34A2C1015	290-0973-00				CAP,FXD,ELCTLT:100UF,20%,25VDC	55680	ULB1E101MPA
A34A2C1021	290-0973-00				CAP,FXD,ELCTLT:100UF,20%,25VDC	55680	ULB1E101MPA
A34A2L1015	108-1112-00				COIL,RF:FIXED 170UH	80009	108-1112-00
A34A2L1025	108-1112-00				COIL,RF:FIXED 170UH	80009	108-1112-00
A34A2R1015	315-0103-00				RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A34A2R1021	315-0103-00				RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A34A2W1017	175-8737-00				CA ASSY,SP,ELEC:5,26 AWG,4.0 L,RIBBON	TK1375	175-8737-00
A34A3	119-1905-01				RELAY ASSEMBLY: (OPTION 07 ONLY)	80009	119-1905-01
A34A3C345	281-0825-00				CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A34A3A1	670-8491-01				CIRCUIT BD ASSY:RELAY (OPTION 07 ONLY)	80009	670-8491-01
A34A3A1C1010	283-0220-03				CAP,FXD,CER DI:0.01UF,20%,50V SQUARE	04222	SR155C103MAA
A34A3A1CR1010	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A34A3A1CR1012	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A34A3A1CR1014	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A34A3A1CR1016	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A34A3A1CR1018	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A34A3A1CR1019	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A34A3A1K1010	148-0108-00				RELAY,ARMATURE:2 FORM C,1.0A,28VDC,COIL 5VD C 61 OHM	11532	720-5
A34A3A1R1010	321-0083-00				RES,FXD,FILM:71.5 OHM,1%,0.125W,TC=TO	07716	CEAD71R50F
A34A3A1R1012	321-0090-00				RES,FXD,FILM:84.5 OHM,1%,0.125W,TC=TO	91637	CMF55116G84R50F
A34A3A1R1014	321-0143-00				RES,FXD,FILM:301 OHM,1%,0.125W,TC=TO	07716	CEAD301R0F
A34A3A1R1016	301-0101-00				RES,FXD,FILM:100 OHM,5%,0.5W	01121	EB1015
A36A1U2046	156-1335-00				MICROCKT,DGTL:LSTTL,DUAL RETRIGGERABLE RESE TTABLE MONOSTABLE MV,SCRN	80009	156-1335-00
A38	670-7947-02	B010100	B010189		CIRCUIT BD ASSY:FRONT PANEL	80009	670-7947-02
A38	670-7947-03	B010190			CIRCUIT BD ASSY:FRONT PNL	80009	670-7947-03
A38C1016	283-0239-00				CAP,FXD,CER DI:0.022UF,10%,50V	04222	3439-050C-223K
A38C1047	283-0204-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A38C2046	283-0776-00				CAP,FXD,MICA DI:2130 PF,1%,500V	00853	D195F2131F0
A38C3030	283-0154-00				CAP,FXD,CER DI:22PF,5%,50V	04222	SR155A220JAA
A38C4028	283-0204-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A38C6021	283-0204-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A38C6091	283-0204-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A38CR1017	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A38CR2018	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A38CR2043	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A38CR3012	152-0322-00				SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A38CR3013	152-0322-00				SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A38CR4017	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A38CR4027	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A38CR6035	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A38CR6090	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A38DS1048	150-1068-00				LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS1054	150-1068-00				LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS1121	150-1068-00				LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS2014	150-1068-00				LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS2016	150-1031-00				LT EMITTING DIO:RED,650NM,40MA MAX	50434	HLMP-1002
A38DS2048	150-1068-00				LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS2049	150-1068-00				LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS2056	150-1068-00				LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS2058	150-1068-00				LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS2122	150-1068-00				LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS2123	150-1068-00				LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3035	150-1068-00				LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3036	150-1068-00				LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A38DS3037	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3038	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3043	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3044	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3045	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3046	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3047	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3048	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3052	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3053	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3055	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3122	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3123	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS4046	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS4052	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS4122	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS4123	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS5015	150-1029-00		LT EMITTING DIO:GREEN,565NM,35MA	58361	Q6480/MV5274C
A38DS5050	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS5120	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS5124	150-1031-00		LT EMITTING DIO:RED,650NM,40MA MAX	50434	HLMP-1002
A38DS6046	150-1033-00		LT EMITTING DIO:AMBER,585NM,40MA MAX	50434	HLMP-1401
A38DS6052	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS6062	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38L1045	108-0742-00		COIL,RF:FIXED,83UH	80009	108-0742-00
A38R1015	315-0334-00		RES,FXD,FILM:330K OHM,5%,0.25W	57668	NTR25J-E 330K
A38R1019	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A38R1026	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A38R1028	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A38R1030	315-0563-00		RES,FXD,FILM:56K OHM,5%,0.25W	19701	5043CX56K00J
A38R1031	315-0563-00		RES,FXD,FILM:56K OHM,5%,0.25W	19701	5043CX56K00J
A38R1039	307-0594-00		RES NTWK,FXD,FI:(8)220 OHM,2%,0.125W	11236	750-81-R220
A38R1053	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A38R1055	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A38R1056	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A38R1121	311-2051-00		RES,VAR,NONWw:PNL,10K OHM,20%,0.5W	01121	WR8602
A38R2019	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A38R2021	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A38R2031	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A38R2041	307-0696-00		RES NTWK,FXD,FI:7,10K OHM,2%,0.15W EACH	01121	108A103
A38R2044	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A38R2045	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A38R3119	307-0592-00		RES NTWK,FXD,FI:9,220 OHM,2%,2W	11236	750-101-R220
A38R4043	311-2051-00		RES,VAR,NONWw:PNL,10K OHM,20%,0.5W	01121	WR8602
A38R4054	307-0594-00		RES NTWK,FXD,FI:(8)220 OHM,2%,0.125W	11236	750-81-R220
A38R4059	307-0594-00		RES NTWK,FXD,FI:(8)220 OHM,2%,0.125W	11236	750-81-R220
A38R4121	311-2051-00		RES,VAR,NONWw:PNL,10K OHM,20%,0.5W	01121	WR8602
A38R5011	315-0202-00		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A38R5012	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A38R6049	311-2049-00		RES,VAR,NONWw:PNL,5K OHM,20%,0.5W	01121	WRA1A028S502M
A38R6051	311-2050-00		RES,VAR,NONWw:PNL,1K OHM,20%,0.5W	01121	WRA1A028S102M
A38R6059	311-0187-00		RES,FXD,FILM:866 OHM,1%,0.125W,TC=TO	07716	CEAD866ROF
A38R6060	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A38R6062	311-2054-00		RES,VAR,NONWw:PNL,20K OHM,20%,0.5W	01121	WRA1A048S203M
A38R6101	321-0250-00		RES,FXD,FILM:3.92K OHM,1%,0.125W,TC=TO	07716	CEAD39200F
A38R6102	321-0198-00		RES,FXD,FILM:1.13K OHM,1%,0.125W,TC=TO	07716	CEAD11300F
A38R6104	311-2052-00		RES,VAR,NONWw:PNL,20K OHM,20%,0.5W	01121	WRA1A028S203M
A38R6106	311-2052-00		RES,VAR,NONWw:PNL,20K OHM,20%,0.5W	01121	WRA1A028S203M

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A38S1023	263-0020-02			SWITCH PB ASSY:MOMENTARY	80009	263-0020-02
A38S1048	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S1054	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S1121	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S2014	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S2020	263-0020-02			SWITCH PB ASSY:MOMENTARY	80009	263-0020-02
A38S2035	263-0054-01	B010100	B010189	SWITCH,ROTARY:OPTICAL	80009	263-0054-01
A38S2035	263-0054-02	B010190		SWITCH,ROTARY:OPTICAL	80009	263-0054-02
A38S2048	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S2049	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S2056	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S2058	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S2122	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S2123	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3035	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3036	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3037	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3038	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3043	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3044	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3045	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3046	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3047	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3048	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3052	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3053	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3055	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3122	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3123	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S4046	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S4052	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S4122	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S4123	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S5050	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S5120	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S6052	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S6062	263-0020-01			SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38U1024	156-0876-00			MICROCKT,DGTL:CMOS,HEX SCHMITT TRIGGER	27014	MM74C14 J OR N
A38U1049	156-0651-02			MICROCKT,DGTL:8-BIT PRL-OUT SER SHF RGTR	80009	156-0651-02
A38U2013	156-0388-03			MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	80009	156-0388-03
A38U2020	156-0385-02			MICROCKT,DGTL:HEX INVERTER,SCRN	80009	156-0385-02
A38U3013	156-0388-03			MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	80009	156-0388-03
A38U3039	160-2357-00	B010100	B010716	MICROCKT,DGTL:8 BIT MICROCOMPUTER	80009	160-2357-00
A38U3039	160-2357-01	B010717		MICROCKT,DGTL:8 BIT MICROCOMPUTER,PRGM	80009	160-2357-01
A38U4014	156-0722-02			MICROCKT,DGTL:TRIPLE 3-INP NAND W/OC OUT	80009	156-0722-02
A38U4021	156-1432-02			MICROCKT,DGTL:DUAL 2/4 LINE DECODER/DEMUX S CREENED	80009	156-1432-02
A38U4030	156-0956-02			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT,SCRN	80009	156-0956-02
A38U5021	156-1432-02			MICROCKT,DGTL:DUAL 2/4 LINE DECODER/DEMUX S CREENED	80009	156-1432-02
A38U5045	156-0651-02			MICROCKT,DGTL:8-BIT PRL-OUT SER SHF RGTR	80009	156-0651-02
A38U6024	156-0469-02			MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A38U6028	156-0651-02			MICROCKT,DGTL:8-BIT PRL-OUT SER SHF RGTR	80009	156-0651-02
A38U6045	156-0651-02			MICROCKT,DGTL:8-BIT PRL-OUT SER SHF RGTR	80009	156-0651-02
A38U6081	156-0651-02			MICROCKT,DGTL:8-BIT PRL-OUT SER SHF RGTR	80009	156-0651-02
A38U6090	156-1161-00			MICROCKT,LINEAR:VOLTAGE REGULATOR,POS,ADJ	12969	UC317T
A38Y3030	158-0185-00			XTAL UNIT,QTZ:6 MHZ,0.015%,PAR	33096	CCAT101352
A40	670-8389-01			CIRCUIT BD ASSY:VIDEO PROCESSOR	80009	670-8389-01

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A40C2016	285-1056-00		CAP,FXD,PLASTIC:1UF,2%,50V	14752	650B1A105G
A40C2051	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C2057	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C2061	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C2066	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C2068	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3011	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3015	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3026	285-0597-00		CAP,FXD,PLASTIC:0.001UF,1%,100V	14752	410B18102F
A40C3034	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3035	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3037	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3042	290-0755-00		CAP,FXD,ELCTLT:100UF,+50%-20%,10WVDC	54473	ECE-A10V100L
A40C3045	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3048	290-0745-00		CAP,FXD,ELCTLT:22UF,+50-20%,25WVDC	54473	ECE-A25V22L
A40C3052	290-0745-00		CAP,FXD,ELCTLT:22UF,+50-20%,25WVDC	54473	ECE-A25V22L
A40C3056	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3058	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3059	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3062	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C4011	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C4014	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40CR2051	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A40CR3045	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A40CR4016	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A40CR4060	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A40L4042	108-0881-00		COIL,RF:FIXED,40.1UH	80009	108-0881-00
A40L4052	108-0881-00		COIL,RF:FIXED,40.1UH	80009	108-0881-00
A40L4053	108-0881-00		COIL,RF:FIXED,40.1UH	80009	108-0881-00
A40Q3038	151-0261-00		TRANSISTOR:PNP,SI,TO-77	80009	151-0261-00
A40Q4025	151-0224-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS6917
A40Q4060	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A40R1012	311-1338-00		RES,VAR,NONWV:TRMR,20K OHM,0.75W	02111	43P203T672
A40R1013	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1015	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1019	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1022	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1024	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1026	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1028	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1032	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1034	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1036	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1038	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1043	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1045	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1047	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1051	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1053	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1057	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1059	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1061	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1063	321-0171-00		RES,FXD,FILM:590 OHM,1%,0.125W,TC=TO	19701	5033ED590ROF
A40R1067	321-0360-00		RES,FXD,FILM:54.9K OHM,1%,0.125W,TC=TO	19701	5033ED54K90F
A40R1069	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1070	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R2021	321-0265-00		RES,FXD,FILM:5.62K OHM,1%,0.125W,TC=TO	19701	5043ED5K620F
A40R2022	321-0361-00		RES,FXD,FILM:56.2K OHM,1%,0.125W,TC=TO	07716	CEAD56201F

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A40R2023	321-0452-00		RES,FXD,FILM:499K OHM,1%,0.125W,TC=TO	19701	5043ED499K0F
A40R2051	321-0231-00		RES,FXD,FILM:2.49K OHM,1%,0.125W,TC=TO	19701	5033ED2K49F
A40R2053	321-0097-00		RES,FXD,FILM:100 OHM,1%,0.125W,TC=TO	91637	CMF551166100ROF
A40R2054	321-0318-00		RES,FXD,FILM:20.0K OHM,1%,0.125W,TC=TO	19701	5033ED20K00F
A40R2055	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A40R2056	321-0277-00		RES,FXD,FILM:7.50K OHM,1%,0.125W,TC=TO	24546	NA55D7501F
A40R2057	321-0329-00		RES,FXD,FILM:26.1K OHM,1%,0.125W,TC=TO	19701	5043ED26K10F
A40R2058	321-0260-00		RES,FXD,FILM:4.99K OHM,1%,0.125W,TC=TO	19701	5033ED4K990F
A40R2064	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A40R2066	321-0327-00		RES,FXD,FILM:24.9K OHM,1%,0.125W,TC=TO	07716	CEAD24901F
A40R3011	321-0294-00		RES,FXD,FILM:11.3K OHM,1%,0.125W,TC=TO	19701	5033ED11K30F
A40R3012	321-0308-00		RES,FXD,FILM:15.8K OHM,1%,0.125W,TC=TO	07716	CEAD 15801F
A40R3020	321-0239-00		RES,FXD,FILM:3.01K OHM,1%,0.125W,TC=TO	19701	5043ED3K010F
A40R3023	315-0122-00		RES,FXD,FILM:1.2K OHM,5%,0.25W	57668	NTR25J-E01K2
A40R3024	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A40R3025	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A40R3028	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=TO	07716	CEAD12401F
A40R3030	311-1917-00		RES,VAR,NONNW:TRMR,5K OHM,10%,0.5 W	32997	3386C-T07-502
A40R3046	321-0318-00		RES,FXD,FILM:20.0K OHM,1%,0.125W,TC=TO	19701	5033ED20K00F
A40R3053	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A40R3058	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A40R3059	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A40R3064	315-0152-00		RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A40R3065	315-0303-00		RES,FXD,FILM:30K OHM,5%,0.25W	19701	5043CX30K00J
A40R4010	321-0306-00		RES,FXD,FILM:15.0K OHM,1%,0.125W,TC=TO	19701	5033ED15J00F
A40R4011	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A40R4012	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A40R4013	321-0335-00		RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A40R4014	321-0335-00		RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A40R4015	321-0328-00		RES,FXD,FILM:25.5K OHM,1%,0.125W,TC=TO	19701	5043ED25K50F
A40R4017	321-0308-00		RES,FXD,FILM:15.8K OHM,1%,0.125W,TC=TO	07716	CEAD 15801F
A40R4018	321-0304-00		RES,FXD,FILM:14.3K OHM,1%,0.125W,TC=TO	19701	5033ED14K30F
A40R4022	315-0162-00		RES,FXD,FILM:1.6K OHM,5%,0.25W	19701	5043CX1K600J
A40R4023	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A40R4024	321-0304-00		RES,FXD,FILM:14.3K OHM,1%,0.125W,TC=TO	19701	5033ED14K30F
A40R4025	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A40R4027	321-0260-00		RES,FXD,FILM:4.99K OHM,1%,0.125W,TC=TO	19701	5033ED4K990F
A40R4028	321-0243-00		RES,FXD,FILM:3.32K OHM,1%,0.125W,TC=TO	19701	5033ED3K32F
A40R4029	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A40R4046	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A40R4060	315-0471-00		RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A40R4065	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A40R4066	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A40R4067	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A40R4068	315-0241-00		RES,FXD,FILM:240 OHM,5%,0.25W	19701	5043CX240R0J
A40U2015	156-1211-00		MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	27014	LF13333N
A40U2039	155-0106-00		MICROCKT,DGTL:NORMAL CKT	80009	155-0106-00
A40U2055	156-0158-04		MICROCKT,LINER:DUAL OPNL AMPL	01295	MC1458JG
A40U2066	156-0770-00		MICROCKT,LINER:OPNL AMPL	27014	LF356H
A40U3015	156-0570-00		MICROCKT,LINER:DUAL COMPARATOR	27014	LM319H
A40U3025	156-1211-00		MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	27014	LF13333N
A40U3035	156-0913-02		MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A40U3040	156-0469-02		MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A40U3045	156-0158-04		MICROCKT,LINER:DUAL OPNL AMPL	01295	MC1458JG
A40U3062	156-0770-00		MICROCKT,LINER:OPNL AMPL	27014	LF356H
A40U3063	156-1211-00		MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	27014	LF13333N
A40VR3011	152-0662-00		SEMICON DVC,DI:ZEN,SI,5V,1%,400MW,DO-7	04713	SZG195RL
A40VR4011	152-0662-00		SEMICON DVC,DI:ZEN,SI,5V,1%,400MW,DO-7	04713	SZG195RL

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A40VR4028	152-0195-00		SEMICON DVC,DI:ZEN,SI,5.1V,5%,0.4W,DO-7	04713	SZ11755RRL
A40W3026	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A42	672-0166-01		CIRCUIT BD ASSY:PRESELECTOR DRIVER (OPTION 01 ONLY)	80009	672-0166-01
A42Q565	151-0426-00		TRANSISTOR:NPN,SI,TO-220	80009	151-0426-00
A42A1	670-5552-05		CIRCUIT BD ASSY:PRESELECTOR DRIVER (OPTION 01 ONLY)	80009	670-5552-05
A42A1C2026	283-0070-00		CAP,FXD,CER DI:30PF,10%,50V	51642	200-050-NP0-300K
A42A1C2045	283-0070-00		CAP,FXD,CER DI:30PF,10%,50V	51642	200-050-NP0-300K
A42A1C2065	283-0330-00		CAP,FXD,CER DI:100PF,5%,50V	05397	C320C101J5R5CA
A42A1C3021	283-0190-00		CAP,FXD,CER DI:0.47UF,5%,50V	04222	SR305C474JAA
A42A1C3028	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A42A1C3043	283-0004-00		CAP,FXD,CER DI:0.02UF,+80-20%,150V	59660	855-558Z5V0203Z
A42A1C3048	283-0051-00		CAP,FXD,CER DI:0.0033UF,5%,100V	04222	SR301A332JAA
A42A1C3052	283-0070-00		CAP,FXD,CER DI:30PF,10%,50V	51642	200-050-NP0-300K
A42A1C3061	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A42A1C4038	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A42A1C4041	290-0718-00		CAP,FXD,ELCTLT:22UF,20%,35V	56289	196D226X0035PE4
A42A1C4044	290-0718-00		CAP,FXD,ELCTLT:22UF,20%,35V	56289	196D226X0035PE4
A42A1C4061	290-0158-00		CAP,FXD,ELCTLT:50UF,+75-15%,25V	26769	40LW506B025U1A
A42A1C4071	290-0209-00		CAP,FXD,ELCTLT:50UF,+75-10%,25V	56289	30D506G025CC9
A42A1C5026	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A42A1C5041	290-0718-00		CAP,FXD,ELCTLT:22UF,20%,35V	56289	196D226X0035PE4
A42A1C5046	290-0718-00		CAP,FXD,ELCTLT:22UF,20%,35V	56289	196D226X0035PE4
A42A1C5051	290-0755-00		CAP,FXD,ELCTLT:100UF,+50%-20%,10WVDC	54473	ECE-A10V100L
A42A1C5061	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A42A1CR1020	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A42A1CR1021	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A42A1CR2065	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A42A1CR2077	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A42A1CR2078	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A42A1CR3061	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A42A1CR3073	152-0353-00		SEMICON DVC,DI:RECT,SI,800V,1W	05828	GP10K-014
A42A1CR4012	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A42A1CR4013	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A42A1CR4032	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A42A1CR4061	152-0333-00		SEMICON DVC,DI:SW,SI,55V,200MA,DO-35	07263	FDH-6012
A42A1L4056	108-0881-00		COIL,RF:FIXED,40.1UH	80009	108-0881-00
A42A1L5051	108-0881-00		COIL,RF:FIXED,40.1UH	80009	108-0881-00
A42A1Q1011	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A42A1Q1022	151-1022-00		TRANSISTOR:FET,N-CHAN,SI,TO-18	80009	151-1022-00
A42A1Q1024	151-1022-00		TRANSISTOR:FET,N-CHAN,SI,TO-18	80009	151-1022-00
A42A1Q2034	151-1022-00		TRANSISTOR:FET,N-CHAN,SI,TO-18	80009	151-1022-00
A42A1Q2036	151-1022-00		TRANSISTOR:FET,N-CHAN,SI,TO-18	80009	151-1022-00
A42A1Q2074	151-1022-00		TRANSISTOR:FET,N-CHAN,SI,TO-18	80009	151-1022-00
A42A1Q3025	151-0290-00		TRANSISTOR:NPN,SI,TO-39	80009	151-0290-00
A42A1Q3061	151-1045-00		TRANSISTOR:FET,P-CHAN,SI,TO-92	04713	SPS628
A42A1Q3077	151-1066-00		TRANSISTOR:FET,P-CHAN,SI,TO-92	80009	151-1066-00
A42A1Q4025	151-0134-00		TRANSISTOR:PNP,SI,TO-39	04713	SM3195
A42A1Q4037	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A42A1Q5052	151-0429-00		TRANSISTOR:DARLINGTON,PNP,SI,TO-126	80009	151-0429-00
A42A1R1013	315-0273-00		RES,FXD,FILM:27K OHM,5%,0.25W	57668	NTR25J-E27K0
A42A1R1017	321-0363-00		RES,FXD,FILM:59.0K OHM,1%,0.125W,TC=T0	07716	CEAD59001F
A42A1R1018	321-0376-00		RES,FXD,FILM:80.6K OHM,1%,0.125W,TC=T0	19701	5043ED80K60F
A42A1R1019	315-0105-00		RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A42A1R1021	321-1654-07		RES,FXD,FILM:651K OHM,0.1%,0.125W,TC=T9	19701	5033RE651K0B
A42A1R1022	325-0322-00		RES,FXD,FILM:26.35K OHM,0.1%,0.3W	07088	K747 26.35 KOHM
A42A1R1023	325-0321-00		RES,FXD,FILM:50.87K OHM,0.05%,0.3W	07088	K747 50.87 KOHM



Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A42A1R1024	325-0320-00		RES,FXD,FILM:7.532K OHM,0.05%,0.3W	07088	K747 7.532 KOHM
A42A1R1025	321-0450-01		RES,FXD,FILM:475K OHM,0.5%,0.125W,TC=TO MI	24546	NA55D4753D
A42A1R1026	325-0317-00		RES,FXD,FILM:84.9K OHM,0.1%,0.3W	07088	K747 84.9 KOHM
A42A1R1027	315-0105-00		RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A42A1R1031	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A42A1R1032	325-0319-00		RES,FXD,FILM:100K OHM,0.1%,0.3W	07088	K747 100.0 KOHM
A42A1R1033	321-0414-00		RES,FXD,FILM:200K OHM,1%,0.125W,TC=TO	07716	CEAD20002F
A42A1R1034	315-0105-00		RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A42A1R1035	321-0510-00		RES,FXD,FILM:2.00M OHM,1%,0.125W,TC=TO	03888	PME55D20003F
A42A1R1036	321-1653-04		RES,FXD,FILM:2.25M OHM,0.1%,0.125W,TC=T2	91637	CMF55116D22503B
A42A1R1037	321-0405-00		RES,FXD,FILM:162K OHM,1%,0.125W,TC=TO	07716	CEAD16202F
A42A1R1045	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A42A1R1049	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A42A1R1052	311-1337-00		RES,VAR,NONWV:TRMR,25K OHM,0.5W	32997	3006P-W84-253
A42A1R1054	311-1337-00		RES,VAR,NONWV:TRMR,25K OHM,0.5W	32997	3006P-W84-253
A42A1R1056	311-1337-00		RES,VAR,NONWV:TRMR,25K OHM,0.5W	32997	3006P-W84-253
A42A1R1061	311-1319-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A42A1R1063	311-1337-00		RES,VAR,NONWV:TRMR,25K OHM,0.5W	32997	3006P-W84-253
A42A1R1064	311-1337-00		RES,VAR,NONWV:TRMR,25K OHM,0.5W	32997	3006P-W84-253
A42A1R1065	311-1337-00		RES,VAR,NONWV:TRMR,25K OHM,0.5W	32997	3006P-W84-253
A42A1R1073	325-0318-00		RES,FXD,FILM:95.7K OHM,0.5%,0.3W	07088	K747 95.7 KOHM
A42A1R1074	321-1652-04		RES,FXD,FILM:375K OHM,0.1%,0.125W,TC=T2	91637	MFF1816D37502B
A42A1R1075	325-0325-00		RES,FXD,FILM:35.97K OHM,0.1%,0.3W	07088	K747 35.97 KOHM
A42A1R1076	325-0328-00		RES,FXD,FILM:141K OHM,1%,0.5W	18612	A104D 141KOHM 1%
A42A1R2012	315-0473-00		RES,FXD,FILM:47K OHM,5%,0.25W	57668	NTR25J-E47K0
A42A1R2013	315-0473-00		RES,FXD,FILM:47K OHM,5%,0.25W	57668	NTR25J-E47K0
A42A1R2014	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A42A1R2015	321-0771-01		RES,FXD,FILM:50 OHM,0.5%,0.125W,TC=TO	57668	RB140XE 50E
A42A1R2021	325-0324-00		RES,FXD,FILM:50K OHM,0.1%,0.3W	07088	K747 50.0 KOHM
A42A1R2022	315-0105-00		RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A42A1R2027	321-0319-00		RES,FXD,FILM:20.5K OHM,1%,0.125W,TC=TO	19701	5033ED20K50F
A42A1R2036	321-0347-00		RES,FXD,FILM:40.2K OHM,1%,0.125W,TC=TO	91637	CMF55116G40201F
A42A1R2062	321-0753-06		RES,FXD,FILM:9K OHM,0.25%,0.125W,TC=T9	07716	CEAE90000C
A42A1R2063	321-0753-06		RES,FXD,FILM:9K OHM,0.25%,0.125W,TC=T9	07716	CEAE90000C
A42A1R2064	315-0105-00		RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A42A1R2066	311-1264-00		RES,VAR,NONWV:TRMR,1.5K OHM,0.5W	32997	3329P-158-152
A42A1R2069	321-0441-00		RES,FXD,FILM:383K OHM,1%,0.125W,TC=TO	19701	5043ED383K0F
A42A1R2072	321-0449-00		RES,FXD,FILM:464K OHM,1%,0.125W,TC=TO	19701	5043ED464K0F
A42A1R2073	321-0891-00		RES,FXD,FILM:800K OHM,1%,0.125W,TC=TO	19701	5043ED800K0F
A42A1R2074	321-0415-00		RES,FXD,FILM:205K OHM,1%,0.125W,TC=TO	07716	CEAD20502F
A42A1R2075	321-0995-00		RES,FXD,FILM:549K OHM,1%,0.125W,TC=TO	24546	NA55D5493F
A42A1R2077	321-0432-00		RES,FXD,FILM:309K OHM,1%,0.125W,TC=TO	07716	CEAD30902F
A42A1R2078	321-0441-00		RES,FXD,FILM:383K OHM,1%,0.125W,TC=TO	19701	5043ED383K0F
A42A1R3011	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A42A1R3012	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A42A1R3013	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A42A1R3014	321-0460-00		RES,FXD,FILM:604K OHM,1%,0.125W,TC=TO	07716	CEAD60402F
A42A1R3021	321-0356-00		RES,FXD,FILM:49.9K OHM,1%,0.125W,TC=TO	19701	5033ED49K90F
A42A1R3028	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A42A1R3041	325-0316-00		RES,FXD,FILM:57.55K OHM,0.1%,0.3W	07088	K747 57.55 KOHM
A42A1R3042	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A42A1R3043	315-0202-C0		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A42A1R3044	321-0434-00		RES,FXD,FILM:324K OHM,1%,0.125W,TC=TO	07716	CEAD32402F
A42A1R3045	321-0891-00		RES,FXD,FILM:800K OHM,1%,0.125W,TC=TO	19701	5043ED800K0F
A42A1R3046	325-0319-00		RES,FXD,FILM:100K OHM,0.1%,0.3W	07088	K747 100.0 KOHM
A42A1R3047	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A42A1R3052	325-0315-00		RES,FXD,FILM:20K OHM,0.05%,0.3W	07088	K747 20KOHM .05%
A42A1R3053	325-0315-00		RES,FXD,FILM:20K OHM,0.05%,0.3W	07088	K747 20KOHM .05%

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A42A1R3054	321-0320-00		RES,FXD,FILM:21.0K OHM,1%,0.125W,TC=TO	19701	5033ED21K00F
A42A1R3055	321-0284-00		RES,FXD,FILM:8.87K OHM,1%,0.125W,TC=TO	19701	5043ED8K870F
A42A1R3056	321-0357-03		RES,FXD,FILM:51.1K OHM,0.25%,0.125W,TC=T2	07716	CEAC51101C
A42A1R3061	321-0451-00		RES,FXD,FILM:487K OHM,1%,0.125W,TC=TO	19701	5043ED487K0F
A42A1R3072	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A42A1R4011	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A42A1R4013	321-0440-00		RES,FXD,FILM:374K OHM,1%,0.125W,TC=TO	07716	CEAD37402F
A42A1R4014	321-0642-00		RES,FXD,FILM:20.3K OHM,0.25%,0.125W,T=T9	19701	5033RE20K30C
A42A1R4016	315-0113-00		RES,FXD,FILM:11K OHM,5%,0.25W	19701	5043CX11K00J
A42A1R4030	315-0202-00		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A42A1R4031	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A42A1R4032	315-0273-00		RES,FXD,FILM:27K OHM,5%,0.25W	57668	NTR25J-E27K0
A42A1R4040	315-0473-00		RES,FXD,FILM:47K OHM,5%,0.25W	57668	NTR25J-E47K0
A42A1R4041	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A42A1R4042	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A42A1R4043	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A42A1R4044	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A42A1R4048	315-0105-00		RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A42A1R4049	310-0705-00		RES,FXD,WW:3 OHM 0.25%,2W,TC=5PPM/DEG C	80009	310-0705-00
A42A1R4051	321-0238-00		RES,FXD,FILM:2.94K OHM,1%,0.125W,TC=TO	07716	CEAD29400F
A42A1R4052	321-0258-00		RES,FXD,FILM:4.75K OHM,1%,0.125W,TC=TO	19701	5033ED4K750F
A42A1R4054	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A42A1R4063	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A42A1R4064	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A42A1R5015	315-0242-00		RES,FXD,FILM:2.4K OHM,5%,0.25W	57668	NTR25J-E02K4
A42A1R5064	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A42A1R5065	315-0755-00		RES,FXD,FILM:7.5M OHM,5%,0.25W	19701	5043CX7M500J
A42A1R5066	315-0475-00		RES,FXD,FILM:4.7M OHM,5%,0.25W	01121	CB4755
A42A1U1011	156-0158-04		MICROCKT,LINER:DUAL OPNL AMPL	01295	MC1458JG
A42A1U1067	156-0937-00		MICROCKT,LINER:VOLTAGE REFERENCE	24355	AD580LH
A42A1U2028	156-0512-03		MICROCKT,LINER:OPNL AMPL	04713	LM308J-8
A42A1U2045	156-0512-03		MICROCKT,LINER:OPNL AMPL	04713	LM308J-8
A42A1U2047	156-0512-03		MICROCKT,LINER:OPNL AMPL	04713	LM308J-8
A42A1U2054	156-0420-00		MICROCKT,LINER:OPNL AMPL	27014	LM321H
A42A1U3054	156-0512-03		MICROCKT,LINER:OPNL AMPL	04713	LM308J-8
A42A1U4061	156-0385-02		MICROCKT,DGTL:HEX INVERTER,SCRN	80009	156-0385-02
A42A1U5022	156-0411-00		MICROCKT,LINER:SGL SPLY COMPARATOR	04713	LM339N
A42A1U5031	156-0913-02		MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A42A1U5036	156-0469-02		MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A42A1VR3011	152-0265-00		SEMICON DVC,DI:ZEN,SI,24V,5%,0.4W	04713	1N970B
A42A1VR3012	152-0281-00		SEMICON DVC,DI:ZEN,SI,22V,5%,0.4W,DO-7	12954	1N969B/DO-35
A42A1VR3061	152-0514-00		SEMICON DVC,DI:ZEN,SI,10V,1%,0.4W,DO-7	04713	SZG15RL
A42A1VR3074	152-0120-00		SEMICON DVC,DI:ZEN,SI,10V,5%,1W,A31A	04713	SZ1619
A42A1W3048	131-0556-00		CONN,RCPT,ELEC:12 CONTACT FEMALE	80009	131-0556-00
A44	672-0158-00		CIRCUIT BD ASSY:1ST LO DRIVER	80009	672-0158-00
A44Q352	151-0415-00		TRANSISTOR:NPN,SI,TO-127	04713	SJE419
A44A1	670-9051-00		CIRCUIT BD ASSY:1ST LO DRIVER	80009	670-9051-00
A44A1C1011	283-0203-00		CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR305SC474MAA
A44A1C1018	283-0203-00		CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR305SC474MAA
A44A1C1020	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A44A1C1029	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A44A1C2011	290-0804-00		CAP,FXD,ELCTLT:10UF,+50-20%,25V	55680	ULB1E100TAAANA
A44A1C2017	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A44A1C2018	283-0330-00		CAP,FXD,CER DI:100PF,5%,50V	05397	C320C101J5R5CA
A44A1C2019	290-0804-00		CAP,FXD,ELCTLT:10UF,+50-20%,25V	55680	ULB1E100TAAANA
A44A1C2021	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A44A1C2022	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A44A1C2025	290-0301-00		CAP,FXD,ELCTLT:10UF,10%,20V	05397	T110B106K020AS

Component No.	Tektronix		Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
	Part No.	Effective	Dscont				
A44A1C2026	283-0326-00				CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A44A1C2032	283-0060-00				CAP,FXD,CER DI:100PF,5%,200V	59660	855-535U2J101J
A44A1C2042	283-0065-00				CAP,FXD,CER DI:0.001UF,5%,50V	59660	0835-591Y5E0102J
A44A1C2043	283-0213-00				CAP,FXD,CER DI:300PF,5%,100V	04222	3429-100A-301J
A44A1C2044	283-0198-00				CAP,FXD,CER DI:0.22UF,20%,50V	05397	C330C224M5U1CA
A44A1C2045	283-0005-00				CAP,FXD,CER DI:0.01UF,+100-0%,250V	04222	SR303E103ZAA
A44A1C2046	283-0060-00				CAP,FXD,CER DI:100PF,5%,200V	59660	855-535U2J101J
A44A1C2048	283-0212-00				CAP,FXD,CER DI:2UF,20%,50V	04222	SR405E205MAA
A44A1C2050	283-0195-00				CAP,FXD,CER DI:680PF,5%,50V	04222	SR205A681JAA
A44A1C2051	283-0005-00				CAP,FXD,CER DI:0.01UF,+100-0%,250V	04222	SR303E103ZAA
A44A1C2054	283-0060-00				CAP,FXD,CER DI:100PF,5%,200V	59660	855-535U2J101J
A44A1C2056	290-0302-00				CAP,FXD,ELCTLT:100UF,10%,20V	05397	T110D107K020MS
A44A1C3013	283-0326-00				CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A44A1C3019	283-0111-00				CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A44A1C3020	283-0175-00				CAP,FXD,CER DI:10PF,5%,200V	05397	C312C100D2G5CA 8
A44A1C3027	283-0326-00				CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A44A1C3033	283-0326-00				CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A44A1C3034	283-0111-00				CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A44A1C3039	290-0574-00				CAP,FXD,ELCTLT:47UF,10%,20V	05397	T368C476K0202AS
A44A1C3045	290-0778-00				CAP,FXD,ELCTLT:1UF,20%,50V,NPLZD	54473	ECE-A50N1
A44A1C3046	290-0158-00				CAP,FXD,ELCTLT:50UF,+75-15%,25V	26769	40LW506B025U1A
A44A1C3047	290-0776-00				CAP,FXD,ELCTLT:22UF,+50-20%,10V	55680	ULA1A220TAA
A44A1C3048	283-0191-00				CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A44A1C4014	283-0111-00				CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A44A1C4016	283-0177-00				CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A44A1C4046	290-0574-00				CAP,FXD,ELCTLT:47UF,10%,20V	05397	T368C476K0202AS
A44A1CR1052	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A44A1CR1053	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A44A1CR1054	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A44A1CR2024	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A44A1CR3014	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A44A1CR3031	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A44A1CR3044	152-0323-00				SEMICON DVC,DI:SW,SI,35V,0.1A,DO-7	14433	WG1518
A44A1CR3047	152-0333-00				SEMICON DVC,DI:SW,SI,55V,200MA,DO-35	07263	FDH-6012
A44A1K3034	148-0064-00				RELAY,REED:FORM A,110MA,28VDC	15636	RA-30231051-96
A44A1L4038	108-0881-00				COIL,RF:FIXED,40.1UH	80009	108-0881-00
A44A1L4041	108-0881-00				COIL,RF:FIXED,40.1UH	80009	108-0881-00
A44A1Q1028	151-0190-00				TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A44A1Q2025	151-0188-00				TRANSISTOR:PNP,SI,TO-92	80009	151-0188-00
A44A1Q2029	151-0302-00				TRANSISTOR:NPN,SI,TO-18	04713	ST899
A44A1Q2035	151-0301-00				TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A44A1Q2039	151-0302-00				TRANSISTOR:NPN,SI,TO-18	04713	ST899
A44A1Q2040	151-1022-00				TRANSISTOR:FET,N-CHAN,SI,TO-18	80009	151-1022-00
A44A1Q2045	151-0619-00				TRANSISTOR:NPN,DUAL,SIX LEAD,TO-5	27014	SL41341
A44A1Q2051	151-0301-00				TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A44A1Q2052	151-0619-00				TRANSISTOR:NPN,DUAL,SIX LEAD,TO-5	27014	SL41341
A44A1Q3019	151-1097-00				TRANSISTOR:FE,SI,TO-92	04713	SPF713
A44A1Q3028	151-0302-00				TRANSISTOR:NPN,SI,TO-18	04713	ST899
A44A1Q3047	151-1022-00				TRANSISTOR:FET,N-CHAN,SI,TO-18	80009	151-1022-00
A44A1R1011	315-0101-00				RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A44A1R1013	311-1240-00				RES,VAR,NONWV:TRMR,25K OHM,10%,0.5W	32997	3386X-T07-253
A44A1R1014	321-0363-00				RES,FXD,FILM:59.0K OHM,1%,0.125W,TC=TO	07716	CEAD59001F
A44A1R1015	321-0363-00				RES,FXD,FILM:59.0K OHM,1%,0.125W,TC=TO	07716	CEAD59001F
A44A1R1018	315-0101-00				RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A44A1R1019	321-0363-00				RES,FXD,FILM:59.0K OHM,1%,0.125W,TC=TO	07716	CEAD59001F
A44A1R1020	321-0001-00				RES,FXD,FILM:10 OHM,1%,0.125W,TC=TO	19701	5033RD10R00FMS
A44A1R1021	321-0222-00				RES,FXD,FILM:2.00K OHM,1%,0.125W,TC=TO	19701	5033ED2K00F
A44A1R1022	311-1240-00				RES,VAR,NONWV:TRMR,25K OHM,10%,0.5W	32997	3386X-T07-253

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A44A1R1024	321-0162-00		RES,FXD,FILM:475 OHM,1%,0.125W,TC=T0	19701	5033ED475R0F
A44A1R1025	321-0162-00		RES,FXD,FILM:475 OHM,1%,0.125W,TC=T0	19701	5033ED475R0F
A44A1R1026	311-1240-00		RES,VAR,NONWV:TRMR,25K OHM,10%,0.5W	32997	3386X-T07-253
A44A1R1028	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A44A1R1029	321-0001-00		RES,FXD,FILM:10 OHM,1%,0.125W,TC=T0	19701	5033RD10R00FMS
A44A1R1030	317-0102-00		RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A44A1R1031	311-2168-00		RES,VAR,NONWV:TRMR,10K OHM,10%,0.5W	18612	1280G 10K OHM 1%
A44A1R1032	311-2168-00		RES,VAR,NONWV:TRMR,10K OHM,10%,0.5W	18612	1280G 10K OHM 1%
A44A1R1034	311-2168-00		RES,VAR,NONWV:TRMR,10K OHM,10%,0.5W	18612	1280G 10K OHM 1%
A44A1R1035	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A44A1R1036	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A44A1R1038	321-0289-07		RES,FXD,FILM:10.0K OHM,0.1%,0.125W,TC=T9	19701	5033RE10K00B
A44A1R1039	321-0273-00		RES,FXD,FILM:6.81K OHM,1%,0.125W,TC=T0	07716	CEAD68100F
A44A1R1040	310-0706-01		RES,FXD,WV:25 OHM,1%,11W,TC=3.5 PPM/DEG C	80009	310-0706-01
A44A1R1041	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A44A1R1042	321-0322-00		RES,FXD,FILM:22.1K OHM,0.1%,0.125W,TC=T0	19701	5033ED22K10F
A44A1R1043	321-0322-00		RES,FXD,FILM:22.1K OHM,0.1%,0.125W,TC=T0	19701	5033ED22K10F
A44A1R1044	321-0090-00		RES,FXD,FILM:84.5 OHM,1%,0.125W,TC=T0	91637	CMF55116G84R50F
A44A1R1045	321-0207-00		RES,FXD,FILM:1.40K OHM,1%,0.125W,TC=T0	19701	5033ED1K400F
A44A1R1046	321-0373-00		RES,FXD,FILM:75.0K OHM,1%,0.125W,TC=T0	19701	5033ED75K00F
A44A1R1047	315-0472-00		RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A44A1R1048	315-0302-00		RES,FXD,FILM:3K OHM,5%,0.25W	57668	NTR25J-E03K0
A44A1R1049	321-0306-00		RES,FXD,FILM:15.0K OHM,1%,0.125W,TC=T0	19701	5033ED15J00F
A44A1R1050	321-0306-00		RES,FXD,FILM:15.0K OHM,1%,0.125W,TC=T0	19701	5033ED15J00F
A44A1R1051	321-0306-00		RES,FXD,FILM:15.0K OHM,1%,0.125W,TC=T0	19701	5033ED15J00F
A44A1R1052	321-0373-00		RES,FXD,FILM:75.0K OHM,1%,0.125W,TC=T0	19701	5033ED75K00F
A44A1R1053	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A44A1R1054	315-0200-00		RES,FXD,FILM:20 OHM,5%,0.25W	19701	5043CX20R00J
A44A1R1055	321-0163-00		RES,FXD,FILM:487 OHM,1%,0.125W,TC=T0	07716	CEAD487R0F
A44A1R2012	307-0542-00		RES NTWK,FXD,FI:(5)10K OHM,5%,0.125W	01121	106A1030R706A103
A44A1R2014	321-0383-00		RES,FXD,FILM:95.3K OHM,1%,0.125W,TC=T0	07716	CEAD95301F
A44A1R2015	321-0337-00		RES,FXD,FILM:31.6K OHM,1%,0.125W,TC=T0	07716	CEAD31601F
A44A1R2016	321-0222-00		RES,FXD,FILM:2.00K OHM,1%,0.125W,TC=T0	19701	5033ED2K00F
A44A1R2017	321-0001-00		RES,FXD,FILM:10 OHM,1%,0.125W,TC=T0	19701	5033RD10R00FMS
A44A1R2021	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A44A1R2022	321-0265-00		RES,FXD,FILM:5.62K OHM,1%,0.125W,TC=T0	19701	5043ED5K620F
A44A1R2022	321-0373-00		RES,FXD,FILM:75.0K OHM,1%,0.125W,TC=T0	19701	5033ED75K00F
A44A1R2023	315-0391-00		RES,FXD,FILM:390 OHM,5%,0.25W	57668	NTR25J-E390E
A44A1R2024	321-0193-00		RES,FXD,FILM:1K OHM,1%,0.125W,TC=T0	19701	5033ED1K00F
A44A1R2025	321-0001-00		RES,FXD,FILM:10 OHM,1%,0.125W,TC=T0	19701	5033RD10R00FMS
A44A1R2026	315-0472-00		RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A44A1R2027	321-0896-03		RES,FXD,FILM:9.8K OHM,0.25%,0.125W,TC=T2	19701	5033RE9K800C
A44A1R2029	315-0510-00		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A44A1R2031	321-0289-09		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=T9	19701	5033RE10K00F
A44A1R2036	325-0269-00		RES,FXD,FILM:22K OHM,1%,0.3W,TC=1PPM/DEG C	07088	K747 22K OHM 1%
A44A1R2037	325-0258-00		RES,FXD,FILM:5.62K OHM,0.25%,0.3W	07088	K747 5.62K OHM
A44A1R2041	325-0323-00		RES,FXD,FILM:10.88K OHM,0.5%,0.3W	07088	K747 10.88 KOHM
A44A1R2042	325-0326-00		RES,FXD,FILM:2.67K OHM,0.5%,0.3W	07088	K747 2.67 KOHM
A44A1R2043	325-0271-00		RES,FXD,FILM:51.1K OHM,0.25%,0.3W	07088	K747 51.1K OHM
A44A1R2044	315-0274-00		RES,FXD,FILM:270K OHM,5%,0.25W	57668	NTR25J-E270K
A44A1R2051	325-0326-00		RES,FXD,FILM:2.67K OHM,0.5%,0.3W	07088	K747 2.67 KOHM
A44A1R2052	325-0327-00		RES,FXD,FILM:4.72K OHM,0.5%,0.3W	07088	K747 4.72 KOHM
A44A1R2053	321-0263-00		RES,FXD,FILM:5.36K OHM,1%,0.125W,TC=T0	07716	CEAD53600F
A44A1R2054	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A44A1R3012	315-0203-00		RES,FXD,FILM:20K OHM,5%,0.25W	57668	NTR25J-E 20K
A44A1R3013	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A44A1R3014	321-0306-00		RES,FXD,FILM:15.0K OHM,1%,0.125W,TC=T0	19701	5033ED15J00F
A44A1R3015	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=T0	19701	5033ED10K0F

Component No.	Tektronix		Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
	Part No.	Effective	Discont				
A44A1R3026	321-0001-00				RES,FXD,FILM:10 OHM,1%,0.125W,TC=TO	19701	5033RD10R00FM5
A44A1R3027	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10R000J
A44A1R3028	315-0912-00				RES,FXD,FILM:9.1K OHM,5%,0.25W	57668	NTR25J-E09K1
A44A1R3031	315-0562-00				RES,FXD,FILM:5.6K OHM,5%,0.25W	57668	NTR25J-E05K6
A44A1R3032	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10R000J
A44A1R3040	315-0154-00				RES,FXD,FILM:150K OHM,5%,0.25W	57668	NTR25J-E150K
A44A1R3046	315-0222-00				RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A44A1R3048	315-0102-00				RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A44A1R3049	315-0123-00				RES,FXD,FILM:12K OHM,5%,0.25W	57668	NTR25J-E12K0
A44A1R4012	315-0473-00				RES,FXD,FILM:47K OHM,5%,0.25W	57668	NTR25J-E47K0
A44A1R4014	315-0101-00				RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A44A1R4015	315-0101-00				RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A44A1R4016	315-0102-00				RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A44A1R4037	315-0470-00				RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A44A1R4038	307-0103-00				RES,FXD,CMPSN:2.7 OHM,5%,0.25W	01121	CB27G5
A44A1R4043	307-0103-00				RES,FXD,CMPSN:2.7 OHM,5%,0.25W	01121	CB27G5
A44A1R4044	315-0470-00				RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A44A1U1013	156-1160-00				MICROCKT,LINER:VOLTAGE REGULATOR	04713	MC78L12ACG
A44A1U1016	156-1256-00				MICROCKT,LINER:MONOLITHIC QUAD ANALOG	32293	IH5010CDD/CJD
A44A1U1018	156-1207-00				MICROCKT,LINER:VOLTAGE REGULATOR,-12 V	04713	MC79L12ACG
A44A1U1025	156-0158-04				MICROCKT,LINER:DUAL OPNL AMPL	01295	MC1458JG
A44A1U2018	156-0512-03				MICROCKT,LINER:OPNL AMPL	04713	LM308J-8
A44A1U2032	156-0512-03				MICROCKT,LINER:OPNL AMPL	04713	LM308J-8
A44A1U2043	156-0512-03				MICROCKT,LINER:OPNL AMPL	04713	LM308J-8
A44A1U2052	156-0512-03				MICROCKT,LINER:OPNL AMPL	04713	LM308J-8
A44A1U3014	156-0411-02				MICROCKT,LINER:QUAD COMPARATOR,SCREENED	04713	LM339JDS
A44A1U3022	156-0967-00				MICROCKT,LINER:D/A CONVERTER	24355	AD561J
A44A1U4017	156-0913-02				MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A44A1U4022	156-0913-02				MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A44A1U4024	156-0913-02				MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A44A1U4034	156-0469-02				MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A44A1VR1055	152-0526-00				SEMICOND DVC,DI:ZEN,SI,6.35V,1%,0.4W,D0-7	14552	DT840615A
A44A1W1027	131-0566-00				BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A44A1W2034	131-0566-00				BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A44A1W2045	131-0566-00				BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A44A1W3048	131-0566-00				BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A46	672-0165-00				CIRCUIT BD ASSY:CENTER FREQ CONTROL	80009	672-0165-00
A46A1	670-9094-00				CIRCUIT BD ASSY:CENTER FREQ CONT	80009	670-9094-00
A46A1C1029	283-5004-00				CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A46A1C1030	283-5002-00				CAP,FXD,CER DI:1000PF,10%,50V	14674	12061A102KAT050R
A46A1C1033	283-5004-00				CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A46A1C1043	285-0894-00				CAP,FXD,PLASTIC:5UF,5%,50V	14752	A650DIA505J
A46A1C1061	283-5004-00				CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A46A1C1065	283-5002-00				CAP,FXD,CER DI:1000PF,10%,50V	14674	12061A102KAT050R
A46A1C1066	283-5004-00				CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A46A1C2015	283-5001-00				CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A46A1C2037	290-5001-00				CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A46A1C2040	290-5001-00				CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A46A1C2043	290-5001-00				CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A46A1C2050	283-5001-00				CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A46A1C2069	290-5001-00				CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A46A1C2074	290-5001-00				CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A46A1C2076	285-0894-00				CAP,FXD,PLASTIC:5UF,5%,50V	14752	A650DIA505J
A46A1C3040	290-5001-00				CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A46A1C3045	290-5001-00				CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A46A1C3076	290-5001-00				CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A46A1CR1024	152-5000-00				SEMICOND DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A46A1CR1025	152-5000-00				SEMICOND DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A46A1CR1026	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A46A1CR1033	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A46A1CR1035	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A46A1CR1056	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A46A1CR1058	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A46A1CR1064	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A46A1CR1067	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A46A1CR1069	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A46A1L4055	108-0417-01		COIL,RF:FIXED,110UH	80009	108-0417-01
A46A1Q1024	151-5000-00		TRANSISTOR:PMP,SI,SOT-23	80009	151-5000-00
A46A1Q1058	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A46A1Q1061	151-5000-00		TRANSISTOR:PMP,SI,SOT-23	80009	151-5000-00
A46A1Q1065	151-5002-00		TRANSISTOR:JFET,N-CH,RDS=60	04713	MMBF4392T1
A46A1Q2017	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A46A1Q2031	151-5002-00		TRANSISTOR:JFET,N-CH,RDS=60	04713	MMBF4392T1
A46A1R1011	321-1741-00		RES SET,MATCHED:10K/10K OHM,1%,0.125W (MATCHED SET W/A46A1R1012)	TK1360	SPF-143-1
A46A1R1012	321-1741-00		RES SET,MATCHED:10K/10K OHM,1%,0.125W (MATCHED SET W/A46A1R1011)	TK1360	SPF-143-1
A46A1R1013	321-1741-00		RES SET,MATCHED:10K/10K OHM,1%,0.125W (MATCHED SET W/A46A1R1014)	TK1360	SPF-143-1
A46A1R1014	321-1741-00		RES SET,MATCHED:10K/10K OHM,1%,0.125W (MATCHED SET W/A46A1R1013)	TK1360	SPF-143-1
A46A1R1015	321-1742-00		RES SET,MATCHED:5K/10K/10.5K OHM,1%,0.125W (MATCHED SET W/A46A1R1016,A46A1R1020)	TK1360	SPF-143-2
A46A1R1016	321-1742-00		RES SET,MATCHED:5K/10K/10.5K OHM,1%,0.125W (MATCHED SET W/A46A1R1015,A46A1R1020)	TK1360	SPF-143-2
A46A1R1020	321-1742-00		RES SET,MATCHED:5K/10K/10.5K OHM,1%,0.125W (MATCHED SET W/A46A1R1015,A46A1R1016)	TK1360	SPF-143-2
A46A1R1021	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A46A1R1022	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A46A1R1023	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A46A1R1024	321-5038-00		RES,FXD,FILM:47.5K,1%,0.125W	01121	BCK4752FT
A46A1R1025	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A46A1R1026	321-5011-00		RES,FXD,FILM:274 OHM,1%,0.125W	01121	BCK2740FT
A46A1R1027	321-5018-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A46A1R1028	311-1238-00		RES,VAR,NONWW:TRMR,5K OHM,0.5W	32997	3386X-DY6-502
A46A1R1029	321-5047-00		RES,FXD,FILM:100K,1%,0.125W	01121	BCK1003FT
A46A1R1030	321-5049-00		RES,FXD,FILM:1 MEG,1%,0.125W	01121	BCK1004FT
A46A1R1031	321-5049-00		RES,FXD,FILM:1 MEG,1%,0.125W	01121	BCK1004FT
A46A1R1032	311-1336-00		RES,VAR,NONWW:TRMR,100K OHM,0.75W	02111	43P104T672
A46A1R1033	321-5049-00		RES,FXD,FILM:1 MEG,1%,0.125W	01121	BCK1004FT
A46A1R1034	321-5018-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A46A1R1035	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A46A1R1036	321-0604-00		RES,FXD,FILM:30K OHM,0.25%,0.125W,TC=T2	19701	5033RC30K00C
A46A1R1039	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A46A1R1048	321-1741-00		RES SET,MATCHED:10K/10K OHM,1%,0.125W (MATCHED SET W/A46A1R1049)	TK1360	SPF-143-1
A46A1R1049	321-1741-00		RES SET,MATCHED:10K/10K OHM,1%,0.125W (MATCHED SET W/A46A1R1048)	TK1360	SPF-143-1
A46A1R1050	321-1741-00		RES SET,MATCHED:10K/10K OHM,1%,0.125W (MATCHED SET W/A46A1R1051)	TK1360	SPF-143-1
A46A1R1051	321-1741-00		RES SET,MATCHED:10K/10K OHM,1%,0.125W (MATCHED SET W/A46A1R1050)	TK1360	SPF-143-1
A46A1R1052	321-1742-00		RES SET,MATCHED:5K/10K/10.5K OHM,1%,0.125W (MATCHED SET W/A46A1R1053,A46A1R1055)	TK1360	SPF-143-2
A46A1R1053	321-1742-00		RES SET,MATCHED:5K/10K/10.5K OHM,1%,0.125W (MATCHED SET W/A46A1R1052,A46A1R1055)	TK1360	SPF-143-2
A46A1R1054	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A46A1R1055	321-1742-00		RES SET,MATCHED:5K/10K/10.5K OHM,1%,0.125W	TK1360	SPF-143-2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
			(MATCHED SET W/A46A1R1052,A46A1R1053)		
A46A1R1056	321-5038-00		RES,FXD,FILM:47.5K,1%,0.125W	01121	BCK4752FT
A46A1R1057	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A46A1R1058	321-5018-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A46A1R1059	321-5011-00		RES,FXD,FILM:274 OHM,1%,0.125W	01121	BCK2740FT
A46A1R1061	321-5018-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A46A1R1062	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A46A1R1063	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A46A1R1064	321-5047-00		RES,FXD,FILM:100K,1%,0.125W	01121	BCK1003FT
A46A1R1065	321-5049-00		RES,FXD,FILM:1 MEG,1%,0.125W	01121	BCK1004FT
A46A1R1066	321-5049-00		RES,FXD,FILM:1 MEG,1%,0.125W	01121	BCK1004FT
A46A1R1067	321-5049-00		RES,FXD,FILM:1 MEG,1%,0.125W	01121	BCK1004FT
A46A1R1068	321-5018-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A46A1R1070	321-0385-00		RES,FXD,FILM:100K OHM,1%,0.125W,TC=T0	19701	5033ED100K0F
A46A1R1073	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A46A1R2017	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A46A1R2019	321-5018-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A46A1R2028	321-5000-00		RES,FXD,FILM:10 OHM,1%,0.125W	57668	MCR18EZHFW10E
A46A1R2029	321-5000-00		RES,FXD,FILM:10 OHM,1%,0.125W	57668	MCR18EZHFW10E
A46A1R2038	321-5043-00		RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A46A1R2039	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A46A1R2046	321-5043-00		RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A46A1R2059	321-5000-00		RES,FXD,FILM:10 OHM,1%,0.125W	57668	MCR18EZHFW10E
A46A1R2060	321-5000-00		RES,FXD,FILM:10 OHM,1%,0.125W	57668	MCR18EZHFW10E
A46A1R2061	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A46A1R2067	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A46A1R2069	321-5043-00		RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A46A1R2074	321-5043-00		RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A46A1R3040	311-1238-00		RES,VAR,NONWV:TRMR,5K OHM,0.5W	32997	3386X-DY6-502
A46A1R3075	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A46A1R4040	311-1241-00		RES,VAR,NONWV:TRMR,100K OHM,0.5W	32997	3386X-T07-104
A46A1R4062	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A46A1R4063	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A46A1U1030	156-1851-00		MICROCKT,LINER:OPERATIONAL AMPLIFIER,SCRN	06665	OP-27BIGZ
A46A1U1035	156-1582-00		MICROCKT,LINER:OPERATIONAL AMPL,BIPOLAR	80009	156-1582-00
A46A1U1055	156-5000-00		MICROCKT,LINER:VOLTAGE COMPARATOR	04713	LM311D
A46A1U1065	156-1851-00		MICROCKT,LINER:OPERATIONAL AMPLIFIER,SCRN	06665	OP-27BIGZ
A46A1U2010	156-1851-00		MICROCKT,LINER:OPERATIONAL AMPLIFIER,SCRN	06665	OP-27BIGZ
A46A1U2015	156-1851-00		MICROCKT,LINER:OPERATIONAL AMPLIFIER,SCRN	06665	OP-27BIGZ
A46A1U2019	156-5000-00		MICROCKT,LINER:VOLTAGE COMPARATOR	04713	LM311D
A46A1U2020	156-1548-01		MICROCKT,INTFC:CMOS,D/A CONVERTER,12 BIT,CU RRENT OUT,MULTIPLYING,AD7541AJN,DIP18.3	51640	AD7541AJN
A46A1U2030	156-1548-01		MICROCKT,INTFC:CMOS,D/A CONVERTER,12 BIT,CU RRENT OUT,MULTIPLYING,AD7541AJN,DIP18.3	51640	AD7541AJN
A46A1U2045	156-1851-00		MICROCKT,LINER:OPERATIONAL AMPLIFIER,SCRN	06665	OP-27BIGZ
A46A1U2050	156-1851-00		MICROCKT,LINER:OPERATIONAL AMPLIFIER,SCRN	06665	OP-27BIGZ
A46A1U2055	156-1548-01		MICROCKT,INTFC:CMOS,D/A CONVERTER,12 BIT,CU RRENT OUT,MULTIPLYING,AD7541AJN,DIP18.3	51640	AD7541AJN
A46A1U2060	156-1548-01		MICROCKT,INTFC:CMOS,D/A CONVERTER,12 BIT,CU RRENT OUT,MULTIPLYING,AD7541AJN,DIP18.3	51640	AD7541AJN
A46A1U2070	156-1582-00		MICROCKT,LINER:OPERATIONAL AMPL,BIPOLAR	80009	156-1582-00
A46A1U3015	156-5035-00		MICROCKT,DGTL:LSTTL,OCTAL D FF	18324	N74LS374D
A46A1U3025	156-5035-00		MICROCKT,DGTL:LSTTL,OCTAL D FF	18324	N74LS374D
A46A1U3035	156-5035-00		MICROCKT,DGTL:LSTTL,OCTAL D FF	18324	N74LS374D
A46A1U3050	156-5035-00		MICROCKT,DGTL:LSTTL,OCTAL D FF	18324	N74LS374D
A46A1U3060	156-5035-00		MICROCKT,DGTL:LSTTL,OCTAL D FF	18324	N74LS374D
A46A1U3070	156-5035-00		MICROCKT,DGTL:LSTTL,OCTAL D FF	18324	N74LS374D
A46A1U4015	156-5032-00		MICROCKT,DGTL:LSTTL,QUAD 2 INP NOR GATE	18324	N74LS02D

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
	Part No.	Effective	Discont			
A46A1U4025	156-5035-00			MICROCKT,DGTL:LSTTL,OCTAL D FF	18324	N74LS374D
A46A1U4035	156-5034-00			MICROCKT,DGTL:LSTTL,OCTAL BFR W/3 STATE OUT	18324	N74LS244D
A46A1U4045	156-5033-00			MICROCKT,DGTL:LSTTL,3 TO 8 LINE ODCDR/DEMUX	18324	74LS138D
A46A1U4060	156-5032-00			MICROCKT,DGTL:LSTTL,QUAD 2 INP NOR GATE	18324	N74LS02D
A48	672-0157-00			CIRCUIT BD ASSY:SPAN ATTENUATOR	80009	672-0157-00
A48A1	670-5550-01			CIRCUIT BD ASSY:SPAN ATTENUATOR	80009	670-5550-01
A48A1C1013	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C1014	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C1019	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C1023	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C1024	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C1027	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C1029	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C1032	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C1034	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C1036	290-0535-00			CAP,FXD,ELCTLT:33UF,20%,10V TANTALUM	56289	196D336X0010KA1
A48A1C1058	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C2024	283-0359-00			CAP,FXD,CER DI:1000PF,10%,200V	04222	SR212A102KAA
A48A1C2026	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C2035	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C2036	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C2037	283-0672-00			CAP,FXD,MICA DI:200PF,1%,500V	00853	D155F2010FO
A48A1C2042	281-0525-00			CAP,FXD,CER DI:470PF,+/-94PF,500V	52763	2RDPLZ007 470PMO
A48A1C2044	281-0523-00			CAP,FXD,CER DI:100PF,20%,350V	52763	2RDPLZ007 100PMU
A48A1C2050	283-0330-00			CAP,FXD,CER DI:100PF,5%,50V	05397	C320C101J5R5CA
A48A1C2052	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C3031	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C3032	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C4035	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C4038	290-0158-00			CAP,FXD,ELCTLT:50UF,+75-15%,25V	26769	40LW506B025U1A
A48A1C4056	290-0574-00			CAP,FXD,ELCTLT:47UF,10%,20V	05397	T368C476K0202AS
A48A1C5018	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C5038	290-0158-00			CAP,FXD,ELCTLT:50UF,+75-15%,25V	26769	40LW506B025U1A
A48A1C5048	290-0574-00			CAP,FXD,ELCTLT:47UF,10%,20V	05397	T368C476K0202AS
A48A1C5055	290-0722-00			CAP,FXD,ELCTLT:100 UF,20%,10V	56289	196D107X0010PE3
A48A1CR1049	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR1051	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR1056	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR1061	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR2051	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR2053	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR3056	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR4056	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR4062	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR4068	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR4069	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1K3065	148-0079-00			RELAY,REED:2 FORM A,110MA,28VDC,COIL 5VDC	15636	RA30382051-99
A48A1K3075	148-0079-00			RELAY,REED:2 FORM A,110MA,28VDC,COIL 5VDC	15636	RA30382051-99
A48A1K4055	148-0064-00			RELAY,REED:FORM A,110MA,28VDC	15636	RA-30231051-96
A48A1K4062	148-0064-00			RELAY,REED:FORM A,110MA,28VDC	15636	RA-30231051-96
A48A1K4072	148-0079-00			RELAY,REED:2 FORM A,110MA,28VDC,COIL 5VDC	15636	RA30382051-99
A48A1L4048	108-0881-00			COIL,RF:FIXED,40.1UH	80009	108-0881-00
A48A1L4053	108-0417-01			COIL,RF:FIXED,110UH	80009	108-0417-01
A48A1L4055	108-0881-00			COIL,RF:FIXED,40.1UH	80009	108-0881-00
A48A1Q2023	151-0301-00			TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A48A1Q2025	151-1022-00			TRANSISTOR:FET,N-CHAN,SI,TO-18	80009	151-1022-00
A48A1Q2028	151-1022-00			TRANSISTOR:FET,N-CHAN,SI,TO-18	80009	151-1022-00
A48A1Q2062	151-0390-00			TRANSISTOR:DARLINGTON,NPN,SI	04713	SPS3414GRMPSU45



Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A48A1Q3056	151-0391-00		TRANSISTOR:DARLINGTON,PNP,SI	04713	SPS6867K
A48A1R1013	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R1014	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R1019	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R1023	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R1024	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R1027	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R1032	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R1033	315-0472-00		RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A48A1R1034	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R1046	315-0106-00		RES,FXD,FILM:10M OHM,5%,0.25W	01121	CB1065
A48A1R1052	315-0431-00		RES,FXD,FILM:430 OHM,5%,0.25W	19701	5043CX430R0J
A48A1R1054	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A48A1R1056	321-0222-00		RES,FXD,FILM:2.00K OHM,1%,0.125W,TC=TO	19701	5033ED2K00F
A48A1R1058	315-0300-00		RES,FXD,FILM:30 OHM,5%,0.25W	19701	5043CX30R00J
A48A1R1059	315-0300-00		RES,FXD,FILM:30 OHM,5%,0.25W	19701	5043CX30R00J
A48A1R1063	311-1336-00		RES,VAR,NONWV:TRMR,100K OHM,0.75W	02111	43P104T672
A48A1R1065	311-1339-00		RES,VAR,NONWV:TRMR,5K OHM,0.75W	02111	43P502T672
A48A1R1067	311-1339-00		RES,VAR,NONWV:TRMR,5K OHM,0.75W	02111	43P502T672
A48A1R1071	311-1339-00		RES,VAR,NONWV:TRMR,5K OHM,0.75W	02111	43P502T672
A48A1R1077	321-0001-00		RES,FXD,FILM:10 OHM,1%,0.125W,TC=TO	19701	5033RD10R00FMS
A48A1R2019	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R2022	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R2035	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R2036	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R2038	321-0306-00		RES,FXD,FILM:15.0K OHM,1%,0.125W,TC=TO	19701	5033ED15J00F
A48A1R2044	321-0299-00		RES,FXD,FILM:12.7K OHM,1%,0.125W,TC=TO	19701	5033ED12K70F
A48A1R2046	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A48A1R2048	315-0203-00		RES,FXD,FILM:20K OHM,5%,0.25W	57668	NTR25J-E 20K
A48A1R2049	315-0431-00		RES,FXD,FILM:430 OHM,5%,0.25W	19701	5043CX430R0J
A48A1R2050	315-0431-00		RES,FXD,FILM:430 OHM,5%,0.25W	19701	5043CX430R0J
A48A1R2051	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A48A1R2053	315-0203-00		RES,FXD,FILM:20K OHM,5%,0.25W	57668	NTR25J-E 20K
A48A1R2066	308-0756-00		RES,FXD,WV:100 OHM,1%,3W	14193	SA31-1000F
A48A1R2068	321-0754-07		RES,FXD,FILM:900 OHM,0.1%,0.125W,TC=T9	19701	5033RE900R0B
A48A1R2072	321-0895-07		RES,FXD,FILM:90 OHM,0.1%,0.125W,TC=T9	57668	RB14 BZE 90E
A48A1R2074	321-0895-07		RES,FXD,FILM:90 OHM,0.1%,0.125W,TC=T9	57668	RB14 BZE 90E
A48A1R2076	321-0001-00		RES,FXD,FILM:10 OHM,1%,0.125W,TC=TO	19701	5033RD10R00FMS
A48A1R3022	315-0475-00		RES,FXD,FILM:4.7M OHM,5%,0.25W	01121	CB4755
A48A1R3024	315-0105-00		RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A48A1R3026	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A48A1R3028	321-0306-00		RES,FXD,FILM:15.0K OHM,1%,0.125W,TC=TO	19701	5033ED15J00F
A48A1R3029	315-0153-00		RES,FXD,FILM:15K OHM,5%,0.25W	19701	5043CX15K00J
A48A1R3036	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A48A1R3038	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A48A1R3042	321-0299-00		RES,FXD,FILM:12.7K OHM,1%,0.125W,TC=TO	19701	5033ED12K70F
A48A1R3044	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A48A1R3046	321-0299-00		RES,FXD,FILM:12.7K OHM,1%,0.125W,TC=TO	19701	5033ED12K70F
A48A1R3047	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R3048	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A48A1R4032	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A48A1R4034	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A48A1R4035	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A48A1R4036	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R4037	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R4038	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R4056	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A48A1R4064	321-0001-00		RES,FXD,FILM:10 OHM,1%,0.125W,TC=TO	19701	5033RD10R00FMS

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont		Name & Description	Mfr. Code	Mfr. Part No.
A48A1R4065	321-0754-07			RES,FXD,FILM:900 OHM,0.1%,0.125W,TC=T9	19701	5033RE900R0B
A48A1R4066	321-0895-07			RES,FXD,FILM:90 OHM,0.1%,0.125W,TC=T9	57668	RB14 BZE 90E
A48A1R5052	315-0470-00			RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A48A1R5058	322-0043-00			RES,FXD,FILM:27.4 OHM,1%,0.25W,TC=T0	91637	CMF55116
A48A1R5068	321-0097-00			RES,FXD,FILM:100 OHM,1%,0.125W,TC=T0	91637	CMF55116G100ROF
A48A1U1025	156-0913-02			MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A48A1U1042	156-0719-00			MICROCKT,LINER:CMOS,10 BIT MULTIPLYING DAC	24355	AD7533LN
A48A1U2015	156-0913-02			MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A48A1U2042	156-0512-03			MICROCKT,LINER:OPNL AMPL	04713	LM308J-8
A48A1U3025	156-1256-00			MICROCKT,LINER:MONOLITHIC QUAD ANALOG	32293	IH5010CDD/CJD
A48A1U3032	156-0512-03			MICROCKT,LINER:OPNL AMPL	04713	LM308J-8
A48A1U3036	156-0512-03			MICROCKT,LINER:OPNL AMPL	04713	LM308J-8
A48A1U4015	156-0956-02			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT,SCRN	80009	156-0956-02
A48A1U4025	156-0541-02			MICROCKT,DGTL:DUAL 2-TO 4-LINE DCDR/DEMUX	80009	156-0541-02
A48A1U4042	156-0140-02			MICROCKT,DGTL:HEX BUFFERS W/OC HV OUT,	80009	156-0140-02
A48A1U5025	156-0469-02			MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A48A1VR1044	152-0514-00			SEMICOND DVC,DI:ZEN,SI,10V,1%,0.4W,DO-7	04713	SZG15RL
A50	119-1992-01	B010100	B010469	CIRCUIT BD ASSY:	80009	119-1992-01
A50	119-1992-02	B010470	B010715	PHASE LOCK ASSY:	80009	119-1992-02
A50	119-1992-03	B010716		PHASE LOCK ASSY:	80009	119-1992-03
A50A1	670-5519-01			CIRCUIT BD ASSY:SYNTHESIZER	80009	670-5519-01
A50A1C1010	283-0203-00			CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR305SC474MAA
A50A1C1030	283-0032-00			CAP,FXD,CER DI:470PF,5%,500V	59660	831-000-Z5E0471J
A50A1C1040	283-0177-00			CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A1C2010	283-0032-00			CAP,FXD,CER DI:470PF,5%,500V	59660	831-000-Z5E0471J
A50A1C2020	283-0032-00			CAP,FXD,CER DI:470PF,5%,500V	59660	831-000-Z5E0471J
A50A1C2021	283-0177-00			CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A1C2040	283-0032-00			CAP,FXD,CER DI:470PF,5%,500V	59660	831-000-Z5E0471J
A50A1C2050	283-0177-00			CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A1C2051	290-0513-00			CAP,FXD,ELCTL:510UF,+75-10%,25V	26769	40EW517C015U1A
A50A1C3029	283-0156-00			CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A50A1C3030	283-0010-00			CAP,FXD,CER DI:0.05UF,+80-20%,50V	04222	SR305E503ZAA
A50A1C3031	283-0032-00			CAP,FXD,CER DI:470PF,5%,500V	59660	831-000-Z5E0471J
A50A1L3029	108-0311-00			COIL,RF:FIXED,150NH	TK1345	108-0311-00
A50A1Q3040	151-0188-00			TRANSISTOR:PMP,SI,TO-92	80009	151-0188-00
A50A1Q3041	151-0188-00			TRANSISTOR:PMP,SI,TO-92	80009	151-0188-00
A50A1R1040	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A50A1R2040	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A50A1R2041	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A50A1R2042	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A50A1R2043	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A50A1R2044	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A50A1R3020	315-0391-00			RES,FXD,FILM:390 OHM,5%,0.25W	57668	NTR25J-E390E
A50A1R3021	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A50A1R3022	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A50A1R3023	315-0241-00			RES,FXD,FILM:240 OHM,5%,0.25W	19701	5043CX240R0J
A50A1R3040	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A50A1R3041	315-0471-00			RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A50A1R3042	315-0471-00			RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A50A1R3043	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A50A1R3050	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A50A1R3051	315-0201-00			RES,FXD,FILM:200 OHM,5%,0.25W	57668	NTR25J-E100E
A50A1U1010	156-0277-00			MICROCKT,LINER:VOLTAGE REGULATOR	04713	LM340T-5.0
A50A1U1020	156-0844-02			MICROCKT,DGTL:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A(NP3)
A50A1U1030	156-0844-02			MICROCKT,DGTL:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A(NP3)
A50A1U1040	156-0331-03			MICROCKT,DGTL:DUAL D TYPE POSITIVE EDGE	01295	SN74S74NP3
A50A1U2010	156-0844-02			MICROCKT,DGTL:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A(NP3)
A50A1U2020	156-0796-01			MICROCKT,DGTL:8 STG SHF & STORE BUS RGTR	02735	CD4094BFX

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A50A1U2030	156-0796-01		MICROCKT,DGTL:8 STG SHF & STORE BUS RGTR	02735	CD4094BFX
A50A1U3030	156-0230-02		MICROCKT,DGTL:ECL,DUAL D-TYPE M/S FF	04713	MC10131LD
A50A2	670-5520-01	B010100 B010469	CIRCUIT BD ASSY:STROBE DRIVER	80009	670-5520-01
A50A2	670-9068-00	B010470	CIRCUIT BD ASSY:STROBE DRIVER	80009	670-9068-00
A50A2C1014	290-5001-00		CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A50A2C1030	290-5000-00		CAP,FXD,ELCTLT:1UF,20%,50V	TK0900	S50V1MICROF
A50A2C1035	283-5010-00		CAP,FXD,CER DI:0.22UF,10%,25V	95275	VJ1210YR22KXA
A50A2C1036	283-5010-00		CAP,FXD,CER DI:0.22UF,10%,25V	95275	VJ1210YR22KXA
A50A2C1040	283-5002-00		CAP,FXD,CER DI:1000PF,10%,50V	14674	12061A102KAT050R
A50A2C1041	283-5003-00		CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A50A2C1042	283-5010-00		CAP,FXD,CER DI:0.22UF,10%,25V	95275	VJ1210YR22KXA
A50A2C1043	283-5010-00		CAP,FXD,CER DI:0.22UF,10%,25V	95275	VJ1210YR22KXA
A50A2C1045	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A50A2C1048	283-5001-00		CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A50A2C1049	283-5001-00		CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A50A2C1060	283-5000-00		CAP,FXD,CER DI:10PF,5%,50V	95275	VJ1206A100JXA
A50A2C1062	283-5000-00		CAP,FXD,CER DI:10PF,5%,50V	95275	VJ1206A100JXA
A50A2C1064	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A50A2C1065	283-5010-00		CAP,FXD,CER DI:0.22UF,10%,25V	95275	VJ1210YR22KXA
A50A2C1066	283-5010-00		CAP,FXD,CER DI:0.22UF,10%,25V	95275	VJ1210YR22KXA
A50A2C1067	283-5000-00		CAP,FXD,CER DI:10PF,5%,50V	95275	VJ1206A100JXA
A50A2C1068	283-5011-00		CAP,FXD,CER DI:33PF,5%,50V	95275	VJ1206A330JXA
A50A2C2092	283-0107-00		CAP,FXD,CER DI:51PF,5%,200V	04222	SR206A510JAA
A50A2FL1024	119-1029-00		FILTER,BANDPASS:5.00674 TO 5.0188 MHZ	80009	119-1029-00
A50A2L1015	108-5003-00		RES,FXD,WW:1000HM,5%,2.5W,SMD	54583	NL453232T-120K
A50A2L1035	108-5003-00		RES,FXD,WW:1000HM,5%,2.5W,SMD	54583	NL453232T-120K
A50A2Q1040	151-5001-00		TRANSISTOR:NPN,SI, SOT-23	80009	151-5001-00
A50A2Q1045	151-5002-00		TRANSISTOR:JFET,N-CH,RDS=60	04713	MMBF4392T1
A50A2R1040	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A50A2R1042	321-5003-00		RES,FXD,FILM:18.2 OHM,1%,0.125W	57668	MCR18EZHFV 18E2
A50A2R1043	321-5043-00		RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A50A2R1044	321-5043-00		RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A50A2R1045	321-5018-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A50A2R1046	321-5008-00		RES,FXD,FILM:150 OHM,1%,0.125W	01121	BCK1500FT
A50A2R1048	321-5029-00		RES,FXD,FILM:8.25K,1%,0.125W	01121	BCK8251FT
A50A2R1062	321-5003-00		RES,FXD,FILM:18.2 OHM,1%,0.125W	57668	MCR18EZHFV 18E2
A50A2R1063	321-5009-00		RES,FXD,FILM:182 OHM,1%,0.125W	01121	BCK1820FT
A50A2R1065	321-5000-00		RES,FXD,FILM:10 OHM,1%,0.125W	57668	MCR18EZHFV10E
A50A2R1068	321-5014-00		RES,FXD,FILM:475 OHM,1%,0.125W	01121	BCK4750FT
A50A2U1015	156-5031-00		MICROCKT,DGTL:STTL,4-BIT UP/DOWN SYN COUNT ER	18324	N74S169AD
A50A2U1035	156-5030-00		MICROCKT,DGTL:STTL,QUAD TWO INPUT AND GATE	18324	N74S08D
A50A2U1036	156-0991-00		MICROCKT,LINER:VOLTAGE REGULATOR	04713	MC78L05ACP
A50A3	670-5522-02		CIRCUIT BD ASSY:OFFSET MIXER	80009	670-5522-02
A50A3C1021	283-0203-00		CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR305SC474MAA
A50A3C1030	290-0527-00		CAP,FXD,ELCTLT:15UF,20%,20V	05397	T368B156M020AS
A50A3C1031	283-0010-00		CAP,FXD,CER DI:0.05UF,+80-20%,50V	04222	SR305E503ZAA
A50A3C1040	283-0203-00		CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR305SC474MAA
A50A3C1050	283-0010-00		CAP,FXD,CER DI:0.05UF,+80-20%,50V	04222	SR305E503ZAA
A50A3C2012	283-0010-00		CAP,FXD,CER DI:0.05UF,+80-20%,50V	04222	SR305E503ZAA
A50A3C2020	283-0010-00		CAP,FXD,CER DI:0.05UF,+80-20%,50V	04222	SR305E503ZAA
A50A3C2041	283-0010-00		CAP,FXD,CER DI:0.05UF,+80-20%,50V	04222	SR305E503ZAA
A50A3C2050	290-0513-00		CAP,FXD,ELCTLT:510UF,+75-10%,25V	26769	40EW517C015U1A
A50A3CR1010	152-0322-00		SEMICONV DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A50A3CR1011	152-0322-00		SEMICONV DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A50A3CR2010	152-0322-00		SEMICONV DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A50A3CR2021	152-0322-00		SEMICONV DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A50A3L2020	108-0226-00		COIL,RF:FIXED,100UH	76493	B4257

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A50A3Q1020	151-0301-00			TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A50A3Q1030	151-0301-00			TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A50A3Q1040	151-0302-00			TRANSISTOR:NPN,SI,TO-18	04713	ST899
A50A3Q2021	151-0434-00			TRANSISTOR:PNP,SI,TO-72	04713	SS7144
A50A3R1010	321-0068-00			RES,FXD,FILM:49.9 OHM,0.1%,0.125W,TC=TO	91637	CMF55116G49R90F
A50A3R1011	321-0068-00			RES,FXD,FILM:49.9 OHM,0.1%,0.125W,TC=TO	91637	CMF55116G49R90F
A50A3R1020	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A50A3R1022	315-0510-00			RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A50A3R1023	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A50A3R1030	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A50A3R1031	315-0432-00			RES,FXD,FILM:4.3K OHM,5%,0.25W	57668	NTR25J-E04K3
A50A3R1040	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A50A3R1041	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10R00J
A50A3R1042	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A50A3R1050	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A50A3R2010	321-0068-00			RES,FXD,FILM:49.9 OHM,0.1%,0.125W,TC=TO	91637	CMF55116G49R90F
A50A3R2021	321-0068-00			RES,FXD,FILM:49.9 OHM,0.1%,0.125W,TC=TO	91637	CMF55116G49R90F
A50A3R2025	315-0471-00			RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A50A3R2026	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A50A3R2030	315-0510-00			RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A50A3R2031	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A50A3R2032	315-0510-00			RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A50A3R2040	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A50A3T1010	120-1011-00			TRANSFORMER,RF:TOROID	80009	120-1011-00
A50A3T2010	120-1011-00			TRANSFORMER,RF:TOROID	80009	120-1011-00
A50A3T2030	120-0459-00			XFMR,TOROID:	80009	120-0459-00
A50A3U1030	156-0991-00			MICROCKT,LINER:VOLTAGE REGULATOR	04713	MC78L05ACP
A50A3U1050	156-0388-03			MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	80009	156-0388-03
A50A3U2040	156-0991-00			MICROCKT,LINER:VOLTAGE REGULATOR	04713	MC78L05ACP
A50A3U2050	156-0386-02			MICROCKT,DGTL:TRIPLE 3-INP NAND GATE,SCRN	80009	156-0386-02
A50A4	670-7921-02	B010100	B010469	CIRCUIT BD ASSY:ERROR AMPL	80009	670-7921-02
A50A4	670-7921-03	B010470		CIRCUIT BD ASSY:ERROR AMPL	80009	670-7921-03
A50A4C1011	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C1012	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C1031	283-0177-00			CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A4C1032	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C1037	283-0177-00			CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A4C1038	283-0339-00			CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA
A50A4C1068	283-0177-00			CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A4C1078	290-0782-00			CAP,FXD,ELCTLT:4.7UF,+75-20%,35VDC	55680	ULB1V4R7TAAANA
A50A4C1079	283-0032-00			CAP,FXD,CER DI:470PF,5%,500V	59660	831-000-Z5E0471J
A50A4C2013	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C2015	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C2019	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C2021	283-0032-00			CAP,FXD,CER DI:470PF,5%,500V	59660	831-000-Z5E0471J
A50A4C2034	283-0177-00			CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A4C2035	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C2048	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C2049	283-0070-00			CAP,FXD,CER DI:30PF,10%,50V	51642	200-050-NP0-300K
A50A4C2059	283-0687-00			CAP,FXD,MICA DI:560PF,2%,300V	00853	D153F561G0
A50A4C2060	283-0177-00			CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A4C2061	283-0176-00			CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A50A4C2062	283-0339-00			CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA
A50A4C2063	283-0330-00	B010470		CAP,FXD,CER DI:100PF,5%,50V	05397	C320C101J5R5CA
A50A4C2065	283-0028-00			CAP,FXD,CER DI:0.0022UF,20%,50V	59660	0805585Y5S0222M
A50A4C2067	283-0177-00			CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A4C2069	283-0203-00			CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR3055C474MAA
A50A4C2071	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A50A4C2072	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C2077	283-0339-00		CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA
A50A4C2078	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A50A4C2082	290-0942-00		CAP,FXD,ELCTLT:100UF,+100-10%,25V	55680	UPA1E101MAH
A50A4C3010	283-0203-00		CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR305SC474MAA
A50A4C3011	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C3044	283-0239-00		CAP,FXD,CER DI:0.022UF,10%,50V	04222	3439-050C-223K
A50A4C3050	290-0804-00		CAP,FXD,ELCTLT:10UF,+50-20%,25V	55680	ULB1E100TAAANA
A50A4C3051	283-0032-00		CAP,FXD,CER DI:470PF,5%,500V	59660	831-000-Z5EQ471J
A50A4C3060	283-0177-00		CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A4C3065	283-0115-00		CAP,FXD,CER DI:47PF,5%,200V	59821	2DDT60K470J
A50A4CR3069	152-0141-02		SEMICONDCV,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A50A4L3010	108-1112-00		COIL,RF:FIXED 170UH	80009	108-1112-00
A50A4L3060	108-1112-00		COIL,RF:FIXED 170UH	80009	108-1112-00
A50A4L3070	120-0382-00		COIL,RF:210UH,+28%-43%,14 TURNS	80009	120-0382-00
A50A4Q2030	151-0301-00		TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A50A4R1011	321-0001-00		RES,FXD,FILM:10 OHM,1%,0.125W,TC=TO	19701	5033RD10R00FMS
A50A4R1021	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A50A4R1022	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A50A4R1023	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A50A4R1024	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A50A4R1031	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A50A4R1032	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A50A4R1034	321-0143-00		RES,FXD,FILM:301 OHM,1%,0.125W,TC=TO	07716	CEAD301ROF
A50A4R1035	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A50A4R1037	315-0510-00		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A50A4R1038	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A50A4R1043	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A50A4R1054	315-0510-00		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A50A4R1061	311-1263-00		RES,VAR,NONW:1K OHM,10%,0.50W	32997	3329P-L58-102
A50A4R1072	315-0161-00		RES,FXD,FILM:160 OHM,5%,0.25W	57668	NTR25J-E 160E
A50A4R1075	307-0114-00		RES,FXD,CMPSN:6.2 OHM,5%,0.25W	01121	CB62G5
A50A4R2013	315-0510-00		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A50A4R2014	321-0001-00		RES,FXD,FILM:10 OHM,1%,0.125W,TC=TO	19701	5033RD10R00FMS
A50A4R2015	321-0243-00		RES,FXD,FILM:3.32K OHM,1%,0.125W,TC=TO	19701	5033ED3K32F
A50A4R2016	321-0001-00		RES,FXD,FILM:10 OHM,1%,0.125W,TC=TO	19701	5033RD10R00FMS
A50A4R2017	315-0202-00		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A50A4R2018	321-0243-00		RES,FXD,FILM:3.32K OHM,1%,0.125W,TC=TO	19701	5033ED3K32F
A50A4R2028	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A50A4R2029	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A50A4R2031	315-0510-00		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A50A4R2038	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A50A4R2042	321-0186-00		RES,FXD,FILM:845 OHM,1%,0.125W,TC=TO	19701	5043ED845R0F
A50A4R2043	315-0204-00		RES,FXD,FILM:200K OHM,5%,0.25W	19701	5043CX200K0J
A50A4R2048	315-0510-00		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A50A4R2049	315-0123-00		RES,FXD,FILM:12K OHM,5%,0.25W	57668	NTR25J-E12K0
A50A4R2051	321-0356-00		RES,FXD,FILM:49.9K OHM,1%,0.125W,TC=TO	19701	5033ED49K90F
A50A4R2052	321-0261-00		RES,FXD,FILM:5.11K OHM,1%,0.125W,TC=TO	19701	5033ED5K110F
A50A4R2061	315-0202-00		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A50A4R2062	315-0202-00		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A50A4R2066	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A50A4R2067	315-0682-00		RES,FXD,FILM:6.8K OHM,5%,0.25W	57668	NTR25J-E06K8
A50A4R2083	321-0155-00		RES,FXD,FILM:402 OHM,1%,0.125W,TC=TO	07716	CEAD402ROF
A50A4R3010	315-0620-00		RES,FXD,FILM:62 OHM,5%,0.25W	19701	5043CX63R00J
A50A4R3011	307-0105-00		RES,FXD,CMPSN:3.9 OHM,5%,0.25W	01121	CB 39G5
A50A4R3046	315-0300-00		RES,FXD,FILM:30 OHM,5%,0.25W	19701	5043CX30R00J
A50A4R3051	321-0179-00		RES,FXD,FILM:715 OHM,1%,0.125W,TC=TO	07716	CEAD715ROF
A50A4R3052	321-0269-00		RES,FXD,FILM:6.19K OHM,1%,0.125W,TC=TO	07716	CEAD61900F

Replaceable Electrical Parts  
492A/492AP Service Vol. 2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A50A4R3054	321-0180-00			RES,FXD,FILM:732 OHM,1%,0.125W,TC=TO	07716	CEAD732R0F
A50A4R3068	315-0682-00			RES,FXD,FILM:6.8K OHM,5%,0.25W	57668	NTR25J-E06K8
A50A4R3077	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A50A4R3078	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A50A4R3082	311-1281-00			RES,VAR,NONW:TRMR,2.5K OHM,0.5W	32997	3329S-L58-252
A50A4R3083	321-0155-00			RES,FXD,FILM:402 OHM,1%,0.125W,TC=TO	07716	CEAD402R0F
A50A4U1015	156-0570-00			MICROCKT,LINER:DUAL COMPARATOR	27014	LM319H
A50A4U1035	156-1126-01			MICROCKT,LINER:VOLTAGE COMPARATOR,SELECTED	01295	LM311JG4
A50A4U1042	156-0991-00			MICROCKT,LINER:VOLTAGE REGULATOR	04713	MC78L05ACP
A50A4U2025	156-0796-01			MICROCKT,DGTL:8 STG SHF & STORE BUS RGTR	02735	CD4094BFX
A50A4U2037	156-1211-00			MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	27014	LF13333N
A50A4U2048	156-0105-02			MICROCKT,LINER:OPNL AMPL,SELECTED	01295	LM301AJG4
A50A4U2065	156-0742-02			MICROCKT,LINER:OPNL AMPL,SELECTED	27014	LM318N/A+
A50A4U2075	156-0277-01			MICROCKT,LINER:VOLTAGE RGLTR,POS 5V,SCRN	04713	MC7805CTD
A50A4U3017	156-1160-00			MICROCKT,LINER:VOLTAGE REGULATOR	04713	MC78L12ACG
A50A4U3075	156-0132-00	B010100	B010475	MICROCKT,LINER:OPNL AMPL	34371	HA2-911-5
A50A4U3075	156-1851-00	B010476		MICROCKT,LINER:OPERATIONAL AMPLIFIER,SCRN	06665	OP-27BIGZ
A50A4VR2065	152-0175-01			SEMICON DVC,DI:ZEN,SI,5.6V,5%,0.4W,DO-7	04713	SZG5021RL
A50A4VR3047	152-0647-00			SEMICON DVC,DI:ZENER,SI,6.8V,5%,400MW,DO-7	04713	1N957B
A50A4VR3048	152-0647-00			SEMICON DVC,DI:ZENER,SI,6.8V,5%,400MW,DO-7	04713	1N957B
A50A4W1050	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A50A4W2084	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A50A5	670-5524-02	B010100	B010715	CIRCUIT BD ASSY:CONTROLLED OSC	80009	670-5524-02
A50A5	670-5524-03	B010716		CIRCUIT BD ASSY:CONTROLLED OSC	80009	670-5524-03
A50A5C1011	281-0810-00			CAP,FXD,CER DI:5.6PF,+/-0.5PF,100V	04222	MA101A5R6DAA
A50A5C1012	283-0260-00			CAP,FXD,CER DI:5.6PF,+/-0.25PF,200V	51642	150 200NP0569C
A50A5C1013	281-0161-00			CAP,VAR,CER DI:5-15PF,350V	59660	518-000A5-15
A50A5C1024	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A5C1025	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A5C1031	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A5C1038	281-0622-00			CAP,FXD,CER DI:47PF,1%,500V (NOMINAL VALUE,SELECTED)	52763	2RDPLZ007 47POLC
A50A5C1041	281-0165-00			CAP,VAR,AIR DI:0.8-10PF,250V	73899	MVM-010W
A50A5C1042	281-0165-00			CAP,VAR,AIR DI:0.8-10PF,250V	73899	MVM-010W
A50A5C1048	281-0622-00			CAP,FXD,CER DI:47PF,1%,500V (NOMINAL VALUE SELECTED)	52763	2RDPLZ007 47POLC
A50A5C2011	281-0168-00			CAP,VAR,AIR DI:1.3-5.4PF,250V	74970	187-0103-005
A50A5C2021	283-0346-00			CAP,FXD,CER DI:0.47UF,+80-20%,100V	20932	5034ES100RD474Z
A50A5C2022	290-0527-00			CAP,FXD,ELCTLT:15UF,20%,20V	05397	T368B156M020AS
A50A5C2023	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A5C2034	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A5C2041	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A5C2042	283-0195-00			CAP,FXD,CER DI:680PF,5%,50V	04222	SR205A681JAA
A50A5C2043	283-0195-00			CAP,FXD,CER DI:680PF,5%,50V	04222	SR205A681JAA
A50A5CR1011	152-0719-00			SEMICON DVC,DI:VVC,SI,100 PF,5%,30V,DO-7	04713	SMV1501
A50A5CR1012	152-0719-00			SEMICON DVC,DI:VVC,SI,100 PF,5%,30V,DO-7	04713	SMV1501
A50A5L1011	108-0105-00			COIL,RF:FIXED,1.59UH	80009	108-0105-00
A50A5L1025	108-0991-00			COIL,RF:FIXED,800NH	80009	108-0991-00
A50A5L1035	108-0990-00			COIL,RF:FIXED,750NH	80009	108-0990-00
A50A5L2034	108-0395-00			COIL,RF:FIXED,64UH	80009	108-0395-00
A50A5L2043	108-0962-00			COIL,RF:FXD,750NH	80009	108-0962-00
A50A5P1025	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A50A5P1033	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A50A5Q1028	151-0188-00			TRANSISTOR:PNP,SI,TO-92	80009	151-0188-00
A50A5Q2025	151-0712-01			TRANSISTOR:SELECTED	04713	SPS8223-1
A50A5Q2026	151-0712-01			TRANSISTOR:SELECTED	04713	SPS8223-1
A50A5Q2033	151-0712-01			TRANSISTOR:SELECTED	04713	SPS8223-1
A50A5Q2041	151-0712-01			TRANSISTOR:SELECTED	04713	SPS8223-1

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A50A5R1024	315-0201-00			RES,FXD,FILM:200 OHM,5%,0.25W	57668	NTR25J-E200E
A50A5R1026	315-0471-00			RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A50A5R1030	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A50A5R1031	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A50A5R1032	315-0390-00			RES,FXD,FILM:39 OHM,5%,0.25W	57668	NTR25J-E39E0
A50A5R1033	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A50A5R2020	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A50A5R2021	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A50A5R2022	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A50A5R2025	315-0182-00			RES,FXD,FILM:1.8K OHM,5%,0.25W	57668	NTR25J-E1K8
A50A5R2026	321-0182-00			RES,FXD,FILM:768 OHM,1%,0.125W,TC=TO	07716	CEAD768R0F
A50A5R2027	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A50A5R2031	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A50A5R2032	315-0220-00			RES,FXD,FILM:22 OHM,5%,0.25W	19701	5043CX22R00J
A50A5R2033	315-0471-00			RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A50A5R2034	315-0101-00	B010100	B010715	RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A50A5R2034	315-0201-00	B010716		RES,FXD,FILM:200 OHM,5%,0.25W	57668	NTR25J-E200E
A50A5R2038	315-0182-00			RES,FXD,FILM:1.8K OHM,5%,0.25W	57668	NTR25J-E1K8
A50A5R2041	315-0103-00	B010100	B010715	RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A50A5R2041	315-0822-00	B010716		RES,FXD,FILM:8.2K OHM,5%,0.25W	19701	5043CX8K200J
A50A5R2042	315-0151-00			RES,FXD,FILM:150 OHM,5%,0.25W	57668	NTR25J-E150E
A50A5R2043	315-0201-00			RES,FXD,FILM:200 OHM,5%,0.25W	57668	NTR25J-E200E
A50A5U2021	156-1160-00			MICROCKT,LINER:VOLTAGE REGULATOR	04713	MC78L12ACG
A50A5Y2012	158-0172-00			XTAL UNIT,QTZ:25.064 MHZ,0.001%,SERIES	33096	CCAT101267
A51	672-0164-00			CIRCUIT BD ASSY:COUNTER	80009	672-0164-00
A51A1	670-7899-01			CIRCUIT BD ASSY:COUNTER	80009	670-7899-01
A51A1C1014	283-0156-00			CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A51A1C1016	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A51A1C1038	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A51A1C2010	283-0195-00			CAP,FXD,CER DI:680PF,5%,50V	04222	SR205A681JAA
A51A1C2034	283-0156-00			CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A51A1C2044	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A51A1C2046	283-0175-00			CAP,FXD,CER DI:10PF,5%,200V	05397	C312C100D2G5CA 8
A51A1C2050	283-0156-00			CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A51A1C2052	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A51A1C2054	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A51A1C2056	283-0114-00			CAP,FXD,CER DI:1500PF,5%,200V	59660	805-534-Y5D0152J
A51A1C2058	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A51A1C2059	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A51A1C3010	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A51A1C3020	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A51A1C3050	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A51A1C3052	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A51A1C3054	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A51A1C3058	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A51A1C4042	290-0748-00			CAP,FXD,ELCTLT:10UF,+50-20%,25WVDC	54473	ECE-BIEV100S
A51A1CR1012	152-0322-00			SEMICON DVC,DI:Schottky,SI,15V,1.2PF,DO-35	50434	5082-2672
A51A1CR1030	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A51A1CR1040	152-0322-00			SEMICON DVC,DI:Schottky,SI,15V,1.2PF,DO-35	50434	5082-2672
A51A1CR1042	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A51A1CR1044	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A51A1CR2040	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A51A1CR2048	152-0322-00			SEMICON DVC,DI:Schottky,SI,15V,1.2PF,DO-35	50434	5082-2672
A51A1CR3056	152-0322-00			SEMICON DVC,DI:Schottky,SI,15V,1.2PF,DO-35	50434	5082-2672
A51A1CR3058	152-0322-00			SEMICON DVC,DI:Schottky,SI,15V,1.2PF,DO-35	50434	5082-2672
A51A1CR4040	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A51A1L2056	108-0734-00			COIL,RF:FIXED,163NH	TK1345	108-0734-00
A51A1L4016	108-0828-00			COIL,RF:FXD,56.4UH	80009	108-0828-00

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A51A1P1036	131-0265-00		CONN,RCPT,ELEC:MINTR,CKT BD MTD,MALE,RTANG	98291	051-053-0000
A51A1P1056	131-0265-00		CONN,RCPT,ELEC:MINTR,CKT BD MTD,MALE,RTANG	98291	051-053-0000
A51A1Q1018	151-0367-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS 8811
A51A1Q1034	151-0369-00		TRANSISTOR:PNP,SI,X-55	04713	SPS8273
A51A1Q1044	151-0369-00		TRANSISTOR:PNP,SI,X-55	04713	SPS8273
A51A1Q4034	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A51A1Q4052	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A51AIR1012	315-0472-00		RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A51AIR1014	315-0201-00		RES,FXD,FILM:200 OHM,5%,0.25W	57668	NTR25J-E200E
A51AIR1016	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A51AIR1020	317-0103-00		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A51AIR1021	317-0103-00		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A51AIR1030	315-0271-00		RES,FXD,FILM:270 OHM,5%,0.25W	57668	NTR25J-E270E
A51AIR1032	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A51AIR1034	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A51AIR1042	315-0271-00		RES,FXD,FILM:270 OHM,5%,0.25W	57668	NTR25J-E270E
A51AIR1044	315-0751-00		RES,FXD,FILM:750 OHM,5%,0.25W	57668	NTR25J-E750E
A51AIR1046	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A51AIR1056	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A51AIR2022	315-0561-00		RES,FXD,FILM:560 OHM,5%,0.25W	19701	5043CX560R0J
A51AIR2030	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A51AIR2032	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A51AIR2034	315-0122-00		RES,FXD,FILM:1.2K OHM,5%,0.25W	57668	NTR25J-E01K2
A51AIR2036	315-0301-00		RES,FXD,FILM:300 OHM,5%,0.25W	57668	NTR25J-E300E
A51AIR2038	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A51AIR2042	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A51AIR2044	315-0122-00		RES,FXD,FILM:1.2K OHM,5%,0.25W	57668	NTR25J-E01K2
A51AIR3010	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A51AIR3012	315-0361-00		RES,FXD,FILM:360 OHM,5%,0.25W	19701	5043CX360R0J
A51AIR3030	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A51AIR3034	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A51AIR3044	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A51AIR3048	315-0153-00		RES,FXD,FILM:15K OHM,5%,0.25W	19701	5043CX15K00J
A51AIR3052	315-0821-00		RES,FXD,FILM:820 OHM,5%,0.25W	19701	5043CX820R0J
A51AIR3054	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A51AIR3056	315-0242-00		RES,FXD,FILM:2.4K OHM,5%,0.25W	57668	NTR25J-E02K4
A51AIR3058	315-0202-00		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A51AIR4010	315-0561-00		RES,FXD,FILM:560 OHM,5%,0.25W	19701	5043CX560R0J
A51AIR4018	315-0472-00		RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A51AIR4020	315-0472-00		RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A51AIR4028	307-0696-00		RES NTWK,FXD,FI:7,10K OHM,2%,0.15W EACH	01121	108A103
A51AIR4036	315-0472-00		RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A51AIR4038	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A51AIR4050	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A51AIR4052	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A51AIU1018	156-0994-02		MICROCKT,DGTL:8 INPUT DATA SEL/MUX,SCRN	80009	156-0994-02
A51AIU1022	156-0796-01		MICROCKT,DGTL:8 STG SHF & STORE BUS RGTR	02735	CD4094BFX
A51AIU1028	156-1172-01		MICROCKT,DGTL:DUAL 4 BIT BIN CNTR,SCRN	80009	156-1172-01
A51AIU1038	156-0230-02		MICROCKT,DGTL:ECL,DUAL D-TYPE M/S FF	04713	MC10131LD
A51AIU1046	156-0994-02		MICROCKT,DGTL:8 INPUT DATA SEL/MUX,SCRN	80009	156-0994-02
A51AIU1050	156-1172-01		MICROCKT,DGTL:DUAL 4 BIT BIN CNTR,SCRN	80009	156-1172-01
A51AIU2010	156-1172-01		MICROCKT,DGTL:DUAL 4 BIT BIN CNTR,SCRN	80009	156-1172-01
A51AIU2018	156-1183-00		MICROCKT,DGTL:STTL,PRESET BINARY LATCH/CNTR	01295	SN74S197NP3
A51AIU2026	156-0914-02		MICROCKT,DGTL:OCT ST BFR W/3 STATE OUT,SCRN	80009	156-0914-02
A51AIU2030	156-0729-01	B010100	MICROCKT,DGTL:3 STATE HEX,SCREENED	27014	DM80L98N/A+
A51AIU2030	156-0720-02	B010683	MICROCKT,DGTL:HEX DRVR,4-TO-2 LINE ENABLE	80009	156-0720-02
A51AIU2034	156-1172-01		MICROCKT,DGTL:DUAL 4 BIT BIN CNTR,SCRN	80009	156-1172-01
A51AIU2040	156-0469-02		MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02



Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A51A1U2046	156-0331-03			MICROCKT,DGTL:DUAL D TYPE POSITIVE EDGE	01295	SN74S74NP3
A51A1U2050	156-1172-01			MICROCKT,DGTL:DUAL 4 BIT BIN CNTR,SCRN	80009	156-1172-01
A51A1U2056	156-0902-00			MICROCKT,DGTL:FM IF AMPL	04713	MC1355P
A51A1U3010	156-0383-02			MICROCKT,DGTL:QUAD 2-INP NOR GATE,SCRN,	80009	156-0383-02
A51A1U3018	156-0799-01			MICROCKT,DGTL:DECADE CNTR/DIVIDER,SCRN	04713	MC14017BCLD
A51A1U3024	156-0914-02			MICROCKT,DGTL:OCT ST BFR W/3 STATE OUT,SCRN	80009	156-0914-02
A51A1U3030	156-0914-02			MICROCKT,DGTL:OCT ST BFR W/3 STATE OUT,SCRN	80009	156-0914-02
A51A1U3034	156-0914-02			MICROCKT,DGTL:OCT ST BFR W/3 STATE OUT,SCRN	80009	156-0914-02
A51A1U3040	156-0798-02			MICROCKT,DGTL:DUAL 14/1-LINE SEL/MUX SCRN	80009	156-0798-02
A51A1U3046	156-0385-02			MICROCKT,DGTL:HEX INVERTER,SCRN	80009	156-0385-02
A51A1U3048	156-0366-02			MICROCKT,DGTL:CMOS,DUAL D FLIP-FLOP,SCRN	02735	CD4013BFX
A51A1U4056	156-1172-01			MICROCKT,DGTL:DUAL 4 BIT BIN CNTR,SCRN	80009	156-1172-01
A54	670-8586-01	8010100	8010229	CIRCUIT BD ASSY:MEMORY	80009	670-8586-01
A54	670-8586-02	8010230		CIRCUIT BD ASSY:MEMORY	80009	670-8586-02
A54	670-9599-00			CIRCUIT BD ASSY:MEMORY (OPTION 39 ONLY)	80009	670-9599-00
A54BT2040	146-0044-00			BATTERY, DRY:3V, 0.17AH @ 0.85MA, BUTTON CELL, LITHIUM-MANGANESE DIOXIDE	00681	ORDER BY DESCR
A54BT2040	146-0057-00			BATTERY, DRY:1.5V NOMINAL (OPTION 39 ONLY)	80009	146-0057-00
A54BT2041	146-0057-00			BATTERY, DRY:1.5V NOMINAL (OPTION 39 ONLY)	80009	146-0057-00
A54BT2042	146-0057-00			BATTERY, DRY:1.5V NOMINAL (OPTION 39 ONLY)	80009	146-0057-00
A54C1010	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C1020	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C1030	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C1034	290-5001-00			CAP, FXD, ELCTLT:10UF, 20%, 16V	TK0900	ALCHIP-S16V10UF
A54C2020	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C2030	290-5001-00			CAP, FXD, ELCTLT:10UF, 20%, 16V	TK0900	ALCHIP-S16V10UF
A54C2040	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C2050	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C2054	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C2056	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C2060	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C3020	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C3030	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C3034	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C3040	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C3042	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C3046	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C4050	290-5001-00			CAP, FXD, ELCTLT:10UF, 20%, 16V	TK0900	ALCHIP-S16V10UF
A54CR1030	152-5001-00			SEMICON DVC, DI: SCHOTTKY, SI, 50V, 1PF, SOT-23	80009	152-5001-00
A54CR2020	152-5000-00			SEMICON DVC, DI: SW, SI, 70V, COM CATHODE	04713	BAV70
A54CR2024	152-5000-00			SEMICON DVC, DI: SW, SI, 70V, COM CATHODE	04713	BAV70
A54CR2030	152-5000-00			SEMICON DVC, DI: SW, SI, 70V, COM CATHODE	04713	BAV70
A54CR3030	152-5001-00			SEMICON DVC, DI: SCHOTTKY, SI, 50V, 1PF, SOT-23	80009	152-5001-00
A54L4040	108-0836-00			COIL, RF: FIXED, 14UH	80009	108-0836-00
A54Q2025	151-5001-00			TRANSISTOR: NPN, SI, SOT-23	80009	151-5001-00
A54Q2030	151-5001-00			TRANSISTOR: NPN, SI, SOT-23	80009	151-5001-00
A54Q2035	151-5001-00			TRANSISTOR: NPN, SI, SOT-23	80009	151-5001-00
A54Q2037	151-5000-00			TRANSISTOR: PNP, SI, SOT-23	80009	151-5000-00
A54R1030	321-5014-00			RES, FXD, FILM: 475 OHM, 1%, 0.125W	01121	BCK4750FT
A54R1046	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A54R1048	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A54R1050	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A54R1051	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A54R1052	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A54R1054	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A54R1056	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A54R1057	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A54R1058	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A54R2020	321-5026-00			RES,FXD,FILM:4.75K,1%,0.125W	01121	BCK4751FT
A54R2026	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A54R2032	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A54R2033	321-5018-00			RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A54R2034	321-5047-00			RES,FXD,FILM:100K,1%,0.125W	01121	BCK1003FT
A54R2035	321-5039-00			RES,FXD,FILM:56.2K,1%,0.125W	01121	BCK5622FT
A54R2036	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A54R2037	321-5015-00			RES,FXD,FILM:562 OHM,1%,0.125W	01121	BCK5620FT
A54R2038	321-5018-00			RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A54R3030	321-5006-00			RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A54R3032	321-5006-00			RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A54R3034	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A54S1050	260-1721-00			SWITCH,ROCKER:8,SPST,125MA,30VDC	81073	76SB08S
A54U1010	156-1842-00			IC,MEMORY:CMOS,SRAM:8K X 8,150NS,OE;,DIP28.6	80009	156-1842-00
A54U1020	156-2473-00			IC,MEMORY:CMOS,SRAM:8K X 8,200NS,10UA,OE;,DIP28.6	TK0961	uPD4464C-20
A54U1030	156-2473-00			IC,MEMORY:CMOS,SRAM:8K X 8,200NS,10UA,OE;,DIP28.6	TK0961	uPD4464C-20
A54U2040	156-5001-00			MICROCKT,DGTL:LSTTL,QUAD 2 INPUT NAND GATE	01295	SN74LS00D
A54U2045	156-5005-00			MICROCKT,DGTL:DUAL 2-TO 4-LINE DCDR/DEMUX	01295	SN74LS139D
A54U2050	156-5034-00			MICROCKT,DGTL:LSTTL,OCTAL BFR W/3 STATE OUT	18324	N74LS244D
A54U3020	156-1842-00			IC,MEMORY:CMOS,SRAM:8K X 8,150NS,OE;,DIP28.6	80009	156-1842-00
A54U3025	156-5005-00			MICROCKT,DGTL:DUAL 2-TO 4-LINE DCDR/DEMUX	01295	SN74LS139D
A54U3030	156-5032-00			MICROCKT,DGTL:LSTTL,QUAD 2 INP NOR GATE	18324	N74LS02D
A54U3040	156-5033-00			MICROCKT,DGTL:LSTTL,3 TO 8 LINE DCDR/DEMUX	18324	74LS138D
A54U3045	156-5033-00			MICROCKT,DGTL:LSTTL,3 TO 8 LINE DCDR/DEMUX	18324	74LS138D
A54U3050	160-3520-01	B010100	B010229	MICROCKT,DGTL:32768 X 8 EPROM,PRGM	80009	160-3520-00
A54U3050	160-3520-01	B010230		MICROCKT,DGTL:32768 X 8 EPROM,PRGM	80009	160-3520-01
A54U3060	160-3521-00	B010100	B010229	MICROCKT,DGTL:32768 X 8 EPROM,PRGM	80009	160-3521-00
A54U3060	160-3521-01	B010230		MICROCKT,DGTL:32768 X 8 EPROM,PRGM	80009	160-3521-01
A54U4020	156-5009-00			MICROCKT,DGTL:OCTAL D FF W/CLEAR	80009	156-5009-00
A54U4030	156-5003-00			MICROCKT,DGTL:LSTTL,DUAL D-TYPE FF	01295	SN74LS74D
A54U4040	156-5033-00			MICROCKT,DGTL:LSTTL,3 TO 8 LINE DCDR/DEMUX	18324	74LS138D
A54W1030	321-5051-00			RES,FXD,FILM:0 OHM,1%,0.125W	80009	321-5051-00
A56	670-8585-01	B010100	B010229	CIRCUIT BD ASSY:GPIB	80009	670-8585-01
A56	670-8585-02	B010230		CIRCUIT BD ASSY:GRIP	80009	670-8585-02
A56C1045	283-5004-00			CAP;FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C1056	290-5001-00			CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A56C1064	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C1074	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C1085	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C1088	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C1094	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C1099	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C1106	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C2057	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C2074	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C2075	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C2076	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C2077	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C2078	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C2084	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A56C2095	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C2105	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C2107	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C3072	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C3074	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C3075	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C3076	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A56C4051	290-5001-00			CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A56DS1047	150-1068-00			LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A56DS1048	150-1068-00			LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A56DS1049	150-1068-00			LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A56DS1050	150-1068-00			LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A56DS1052	150-1068-00			LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A56DS1053	150-1068-00			LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A56DS1054	150-1068-00			LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A56L4048	108-0836-00			COIL,RF:FIXED,14UH	80009	108-0836-00
A56R1042	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R1043	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R2044	321-5013-00			RES,FXD,FILM:392 OHM,1%,0.125W	01121	BCK3920FT
A56R2045	321-5013-00			RES,FXD,FILM:392 OHM,1%,0.125W	01121	BCK3920FT
A56R2046	321-5013-00			RES,FXD,FILM:392 OHM,1%,0.125W	01121	BCK3920FT
A56R2047	321-5013-00			RES,FXD,FILM:392 OHM,1%,0.125W	01121	BCK3920FT
A56R2072	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R2075	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R2076	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R2077	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R2078	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R3041	321-5013-00			RES,FXD,FILM:392 OHM,1%,0.125W	01121	BCK3920FT
A56R3042	321-5013-00			RES,FXD,FILM:392 OHM,1%,0.125W	01121	BCK3920FT
A56R3043	321-5013-00			RES,FXD,FILM:392 OHM,1%,0.125W	01121	BCK3920FT
A56R3074	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R3075	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R3076	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R3077	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R3086	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R3087	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R4082	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R4083	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R4084	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R4085	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R4086	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R6014	321-5010-00			RES,FXD,FILM:221 OHM,1%,0.125W	01121	BCK221FT
A56U1010	160-3522-00	B010100	B010229	MICROCKT,DGTL:32768 X 8 EPROM,PRGM	80009	160-3522-00
A56U1010	160-3522-01	B010230		MICROCKT,DGTL:32768 X 8 EPROM,PRGM	80009	160-3522-01
A56U1020	160-3523-00	B010100	B010229	MICROCKT,DGTL:32768 X 8 EPROM,PRGM	80009	160-3523-00
A56U1020	160-3523-01	B010230		MICROCKT,DGTL:32768 X 8 EPROM,PRGM	80009	160-3523-01
A56U1025	160-3524-00	B010100	B010229	MICROCKT,DGTL:32768 X 8 EPROM,PRGM	80009	160-3524-00
A56U1025	160-3524-01	B010230		MICROCKT,DGTL:32768 X 8 EPROM,PRGM	80009	160-3524-01
A56U1035	160-3525-00	B010100	B010229	MICROCKT,DGTL:32768 X 8 EPROM,PRGM	80009	160-3525-00
A56U1035	160-3525-01	B010230		MICROCKT,DGTL:32768 X 8 EPROM,PRGM	80009	160-3525-01
A56U1040	156-5033-00			MICROCKT,DGTL:LSTTL,3 TO 8 LINE DCDR/DEMUX	18324	74LS138D
A56U1055	156-5033-00			MICROCKT,DGTL:LSTTL,3 TO 8 LINE DCDR/DEMUX	18324	74LS138D
A56U2040	156-5001-00			MICROCKT,DGTL:LSTTL,QUAD 2 INPUT NAND GATE	01295	SN74LS00D
A56U2044	156-5009-00			MICROCKT,DGTL:OCTAL D FF W/CLEAR	80009	156-5009-00
A56U2045	156-5006-00			MICROCKT,DGTL:LSTTL,OCTAL INVERTER BUFFER	01295	SN74LS240D
A56U2050	156-1444-01			MICROCKT,DGTL:NMOS,GPIB INTFC CONTROLLER	01295	TMS9914A (NL
A56U3015	160-3526-00	B010100	B010229	MICROCKT,DGTL:32768 X 8 EPROM,PRGM	80009	160-3526-00
A56U3015	160-3526-01	B010230		MICROCKT,DGTL:32768 X 8 EPROM,PRGM	80009	160-3526-01

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A56U3020	160-3527-01	B010230	MICROCKT,DGTL:32768 X 8 EPROM,PRGM	80009	160-3527-01
A56U3040	156-5001-00		MICROCKT,DGTL:LSTTL,QUAD 2 INPUT NAND GATE	01295	SN74LS00D
A56U3045	156-5036-00		MICROCKT,DGTL:LSTTL,QUAD TWO INPUT EXCLUSIV E	80009	156-5036-00
A56U4040	156-5001-00		MICROCKT,DGTL:LSTTL,QUAD 2 INPUT NAND GATE	01295	SN74LS00D
A56W1044	321-5051-00		RES,FXD,FILM:0 OHM,1%,0.125W	80009	321-5051-00
A56A1	670-7916-01		CIRCUIT BD ASSY:GPIB EXTENDER	80009	670-7916-01
A56A1P560	131-2581-00		CONN,RCPT,ELEC:CKT BD,4 X 7 CONT,FEMALE	91506	528-AG29D
A56A1P566	131-1609-00		CONN,RCPT,ELEC:EDGE CARD,2 X 8,0.1 SPACING	80009	131-1609-00
A58	670-8882-00		CIRCUIT BD ASSY:PROCESSOR	80009	670-8882-00
A58C1015	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1016	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1017	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1025	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1026	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1027	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1028	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1031	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1032	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1033	283-5001-00		CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A58C1034	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1035	283-5001-00		CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A58C1036	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C2015	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C2030	290-5003-00		CAP,FXD,ELCTLT:47UF,20%,10V	56289	193D476X0010E2
A58C2031	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C2032	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C2033	283-5001-00		CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A58C2034	283-5002-00		CAP,FXD,CER DI:100PF,10%,50V	14674	12061A102KAT050R
A58C2035	283-5001-00		CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A58C2036	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C3015	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C3020	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C3025	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C3030	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C3034	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C3035	290-5001-00		CAP,FXD,ELCTLT:10UF,20%,16V	TK090C	ALCHIP-S16V10UF
A58C3036	290-5003-00		CAP,FXD,ELCTLT:47UF,20%,10V	56289	193D476X0010E2
A58CR1030	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A58CR2020	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A58CR2025	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A58L1035	108-5002-00		RES,FXD,WW:20 OHM,5%,2.5W,SMD	54583	NL453232T-150K
A58L3035	108-0836-00		COIL,RF:FIXED,14UH	80009	108-0836-00
A58Q1030	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A58Q2030	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A58Q2035	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A58R1010	321-5027-00		RES,FXD,FILM:5.62K,1%,0.125W	01121	BCK5621FT
A58R1021	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R1022	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R1023	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R1024	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R1025	321-5027-00		RES,FXD,FILM:5.62K,1%,0.125W	01121	BCK5621FT
A58R1026	321-5027-00		RES,FXD,FILM:5.62K,1%,0.125W	01121	BCK5621FT
A58R1030	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R1031	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R1032	321-5035-00		RES,FXD,FILM:27.4K,1%,0.125W	01121	BCK2742FT
A58R1033	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R1034	321-5018-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A58R1035	321-5021-00			RES, FXD, FILM: 1.82K, 1%, 0.125W	01121	BCK1821FT
A58R1036	321-5035-00			RES, FXD, FILM: 27.4K, 1%, 0.125W	01121	BCK2742FT
A58R1037	321-5035-00			RES, FXD, FILM: 27.4K, 1%, 0.125W	01121	BCK2742FT
A58R1038	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R2020	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R2021	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R2022	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R2023	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R2024	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R2025	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R2030	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R2031	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R2032	321-5018-00			RES, FXD, FILM: 1.00K, 1%, 0.125W	01121	BCK1001FT
A58R2033	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R2034	321-5021-00			RES, FXD, FILM: 1.82K, 1%, 0.125W	01121	BCK1821FT
A58R2035	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R2036	321-5018-00			RES, FXD, FILM: 1.00K, 1%, 0.125W	01121	BCK1001FT
A58R2037	321-5035-00			RES, FXD, FILM: 27.4K, 1%, 0.125W	01121	BCK2742FT
A58R2038	321-5018-00			RES, FXD, FILM: 1.00K, 1%, 0.125W	01121	BCK1001FT
A58R2039	321-5018-00			RES, FXD, FILM: 1.00K, 1%, 0.125W	01121	BCK1001FT
A58R2045	321-5027-00			RES, FXD, FILM: 5.62K, 1%, 0.125W	01121	BCK5621FT
A58R3010	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R3011	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R3012	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R3013	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R3014	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R3015	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R3016	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R3017	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R3030	321-5021-00			RES, FXD, FILM: 1.82K, 1%, 0.125W	01121	BCK1821FT
A58R3031	321-5021-00			RES, FXD, FILM: 1.82K, 1%, 0.125W	01121	BCK1821FT
A58R3032	321-5018-00			RES, FXD, FILM: 1.00K, 1%, 0.125W	01121	BCK1001FT
A58R3033	321-5021-00			RES, FXD, FILM: 1.82K, 1%, 0.125W	01121	BCK1821FT
A58R3034	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58R3035	321-5021-00			RES, FXD, FILM: 1.82K, 1%, 0.125W	01121	BCK1821FT
A58R3036	321-5006-00			RES, FXD, FILM: 100 OHM, 1%, 0.125W	01121	BCK1000FT
A58R3037	321-5021-00			RES, FXD, FILM: 1.82K, 1%, 0.125W	01121	BCK1821FT
A58R3044	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A58U1010	156-0427-03	B010100	B010412	MICROCKT, DGTL: NMOS, PERIPHERAL INTFC ADPTR	04713	MC6821L
A58U1010	156-0427-04	B010413		MICROCKT, DGTL: PERIPHERAL INTERFACE ADPTR	04713	MC6821LD
A58U1015	156-5016-00			MICROCKT, DGTL: LSTTL, OCTAL BUS XCVR	80009	156-5016-00
A58U1020	156-1458-00			MICROCKT, DGTL: NMOS, DMA CONTROLLER	04713	MC6844 (P OR L)
A58U1024	156-5034-00			MICROCKT, DGTL: LSTTL, OCTAL BFR W/3 STATE OUT	18324	N74LS244D
A58U1025	156-1342-01	B010100	B010536	MICROCKT, DGTL: NMOS, MPU, 8-BIT W/CLK	04713	SC67127P
A58U1025	156-1342-00	B010537		MICROCKT, DGTL: NMOS, 8 BIT W/CLOCK & RAM	04713	MC6802P
A58U1030	156-5048-00			MICROCKT, DGTL: LSTTL, QUAD, 2 INP & W/OC OUT	18324	N74LS09D
A58U1035	156-5015-00			MICROCKT, DGTL: HEX INVERTER	01295	SN74LS04D
A58U2015	156-1426-00			MICROCKT, DGTL: NMOS, PROGRAMMABLE TIMER MDL	04713	MC68B40 (L OR P)
A58U2025	156-5016-00			MICROCKT, DGTL: LSTTL, OCTAL BUS XCVR	80009	156-5016-00
A58U2030	156-5034-00			MICROCKT, DGTL: LSTTL, OCTAL BFR W/3 STATE OUT	18324	N74LS244D
A58U2035	156-5024-00			MICROCKT, DGTL: LSTTL, HEX INVERTER W/OPEN	01295	SN74LS05D
A58U2036	156-5012-00			MICROCKT, DGTL: LSTTL, DUAL, 4 INPUT NAND	01295	SN74LS20C
A58U3010	156-5016-00			MICROCKT, DGTL: LSTTL, OCTAL BUS XCVR	80009	156-5016-00
A58U3015	156-5034-00			MICROCKT, DGTL: LSTTL, OCTAL BFR W/3 STATE OUT	18324	N74LS244D
A58U3020	156-5034-00			MICROCKT, DGTL: LSTTL, OCTAL BFR W/3 STATE OUT	18324	N74LS244D
A58U3025	156-5034-00			MICROCKT, DGTL: LSTTL, OCTAL BFR W/3 STATE OUT	18324	N74LS244D
A58U3030	156-5034-00			MICROCKT, DGTL: LSTTL, OCTAL BFR W/3 STATE OUT	18324	N74LS244D

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A58U3035	156-5033-00			MICROCKT,DGTL:LSTTL,3 TO 8 LINE DCDR/DEMUX	18324	74LS138D
A58U3036	156-5014-00			MICROCKT,DGTL:LSTTL,QUAD TWO-INPUT OR GATE	01295	SN74LS32D
A58W2035	321-5051-00			RES,FXD,FILM:0 OHM,1%,0.125W	80009	321-5051-00
A58Y1030	158-0257-00			XTAL UNIT,QTZ:3.4133MHZ,0.01%,ANTIRESONANT	33096	CCAT101872
A60	670-9100-01	B010100	B010431	CIRCUIT BD ASSY:DIGITAL STORAGE INTERFACE	80009	670-9100-01
A60	670-9100-02	B010432		CIRCUIT BD ASSY:DIGITAL STORAGE INTERFACE	80009	670-9100-02
A60C1031	283-0346-00			CAP,FXD,CER DI:0.47UF,+80-20%,100V	20932	5034ES100RD474Z
A60C2011	283-0330-00	B010100	B010431	CAP,FXD,CER DI:100PF,5%,50V	05397	C320C101J5R5CA
A60C2061	283-0065-00			CAP,FXD,CER DI:0.001UF,5%,50V	59660	0835-591Y5E0102J
A60C5061	283-0065-00			CAP,FXD,CER DI:0.001UF,5%,50V	59660	0835-591Y5E0102J
A60C6011	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A60C6041	290-0527-00			CAP,FXD,ELCLTL:15UF,20%,20V	05397	T368B156M020AS
A60C6042	290-0527-00			CAP,FXD,ELCLTL:15UF,20%,20V	05397	T368B156M020AS
A60C6043	290-0527-00			CAP,FXD,ELCLTL:15UF,20%,20V	05397	T368B156M020AS
A60C6051	283-0346-00			CAP,FXD,CER DI:0.47UF,+80-20%,100V	20932	5034ES100RD474Z
A60L6041	108-0598-00			COIL,RF:FIXED,200UH	80009	108-0598-00
A60L6042	108-0598-00			COIL,RF:FIXED,200UH	80009	108-0598-00
A60L6043	108-0598-00			COIL,RF:FIXED,200UH	80009	108-0598-00
A60R1011	315-0153-00			RES,FXD,FILM:15K OHM,5%,0.25W	19701	5043CX15K00J
A60R1032	321-0199-00			RES,FXD,FILM:1.15K OHM,1%,0.125W,TC=TO	07716	CEAD11500F
A60R1033	321-0277-00			RES,FXD,FILM:7.50K OHM,1%,0.125W,TC=TO	24546	NA55D7501F
A60R1034	321-0188-00			RES,FXD,FILM:887 OHM,1%,0.125W,TC=TO	07716	CEAD887R0F
A60R1040	311-1915-00			RES,VAR,NONWV:TRMR,20K OHM,10%,0.5 W	32997	3386C-T07-203
A60R1050	311-1921-00			RES,VAR,NONWV:TRMR,250 OHM,10%,0.5 W	32997	3386C-T07-251
A60R1053	321-0188-00			RES,FXD,FILM:887 OHM,1%,0.125W,TC=TO	07716	CEAD887R0F
A60R1055	311-1915-00			RES,VAR,NONWV:TRMR,20K OHM,10%,0.5 W	32997	3386C-T07-203
A60R1060	311-1921-00			RES,VAR,NONWV:TRMR,250 OHM,10%,0.5 W	32997	3386C-T07-251
A60R2011	315-0152-00	B010100	B010431	RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A60R3011	315-0152-00			RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A60R3061	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A60R3062	321-0412-00			RES,FXD,FILM:191K OHM,1%,0.125W,TC=TO	07716	CEAD19102F
A60R3063	321-0232-00			RES,FXD,FILM:2.55K OHM,1%,0.125W,TC=TO	19701	5043ED2K550F
A60R4040	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A60R4061	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A60R5041	315-0221-00			RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A60R5042	321-0402-00			RES,FXD,FILM:150K OHM,1%,0.125W,TC=TO	19701	5033ED150K0F
A60R5061	321-0412-00			RES,FXD,FILM:191K OHM,1%,0.125W,TC=TO	07716	CEAD19102F
A60R5062	321-0277-00			RES,FXD,FILM:7.50K OHM,1%,0.125W,TC=TO	24546	NA55D7501F
A60R5063	321-0232-00			RES,FXD,FILM:2.55K OHM,1%,0.125W,TC=TO	19701	5043ED2K550F
A60R6011	307-0446-00			RES NTWK,FXD,FI:10K OHM,20%,(9)RES	11236	750-101-R10K
A60R6041	307-0446-00			RES NTWK,FXD,FI:10K OHM,20%,(9)RES	11236	750-101-R10K
A60R6051	321-0277-00			RES,FXD,FILM:7.50K OHM,1%,0.125W,TC=TO	24546	NA55D7501F
A60R6052	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A60R6053	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A60U1010	156-0385-02			MICROCKT,DGTL:HEX INVERTER,SCRN	80009	156-0385-02
A60U1020	156-0391-02			MICROCKT,DGTL:HEX LATCH W/CLEAR,SCRN	80009	156-0391-02
A60U2010	156-0480-02			MICROCKT,DGTL:QUAD 2-INP & GATE,SCRN	80009	156-0480-02
A60U2020	156-0927-02	B010100	B010452	MICROCKT,LINER:DIGITAL/ANALOG CONVERTER	80009	156-0927-02
A60U2020	156-0927-00	B010453		MICROCKT,LINER:DGTL TO ANLG CONV	18324	MC3410(CF OR F)
A60U2030	156-0391-02			MICROCKT,DGTL:HEX LATCH W/CLEAR,SCRN	80009	156-0391-02
A60U2040	156-0452-02			MICROCKT,DGTL:4-WIDE,2-INP AOI,SCREENED	04713	SN74LS54 ND/JD
A60U2050	156-0388-03			MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	30009	156-0388-03
A60U3010	156-0382-02			MICROCKT,DGTL:QUAD 2 INP NAND GATE BURN	80009	156-0382-02
A60U3020	156-2565-00			MICROCKT,DGTL:H MOS,CUSTOM,INTEGRATED WAVEFO RM PROCESSOR	80009	156-2565-00
A60U3040	156-0391-02			MICROCKT,DGTL:HEX LATCH W/CLEAR,SCRN	80009	156-0391-02
A60U3050	156-1226-00			MICROCKT,LINER:DUAL COMPARATOR	18324	LM319F

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A60U4010	156-1228-00			IC, MEMORY: NMOS, SRAM; 4K X 1, 70NS; , DIP18.3	34335	AM2147-70DC
A60U4040	156-0927-02	B010100	B010452	MICROCKT, LINEAR: DIGITAL/ANALOG CONVERTER	80009	156-0927-02
A60U4040	156-0927-00	B010453		MICROCKT, LINEAR: DGTL TO ANLG CONV	18324	MC3410(CF OR F)
A60U4060	156-1126-01			MICROCKT, LINEAR: VOLTAGE COMPARATOR, SELECTED	01295	LM311JG4
A60U5010	156-1228-00			IC, MEMORY: NMOS, SRAM; 4K X 1, 70NS; , DIP18.3	34335	AM2147-70DC
A60U5020	156-2566-00	B010100	B010431	MICROCKT, DGTL: CMOS, GATE ARRAY	TK1873	CKT141D
A60U5020	156-2566-01	B010432		MICROCKT, DGTL: CMOS, ASIC, STD CELL, HORIZ DGTL STORAGE PINS I6 & 18 NOT CONNECTED	80009	156-2566-01
A60U5040	156-0852-02			MICROCKT, DGTL: LSTTL, HEX BUS DRIVER	01295	SN74LS367NP3
A60U6010	156-0391-02			MICROCKT, DGTL: HEX LATCH W/CLEAR, SCRN	80009	156-0391-02
A60U6020	156-0956-02			MICROCKT, DGTL: OCTAL BFR W/3 STATE OUT, SCRN	80009	156-0956-02
A60U6030	156-0469-02			MICROCKT, DGTL: 3/8 LINE DCDR, SCRN	80009	156-0469-02
A60U6060	156-1272-00			MICROCKT, LINEAR: DUAL OPERATIONAL AMPLIFIER	80009	156-1272-00
A60W2011	131-0566-00	B010432		BUS, CONDUCTOR: DUMMY RES, 0.094 OD X 0.225 L	24546	OMA 07
A61	672-0163-00	B010100	B010431	CIRCUIT BD ASSY: VERTICAL DIGITAL STORAGE	80009	672-0163-00
A61	672-0163-01	B010432	B010711	CIRCUIT BD ASSY: VERTICAL DIGITAL STORAGE	80009	672-0163-01
A61	672-0163-02	B010712		CIRCUIT BD ASSY: VERTICAL DIGITAL STORAGE	80009	672-0163-02
A61A1	670-9099-00	B010100	B010431	CIRCUIT BD ASSY: DIGITAL STORAGE	80009	670-9099-00
A61A1	670-9099-01	B010432	B010711	CIRCUIT BD ASSY: DIGITAL STORAGE	80009	670-9099-01
A61A1	670-9099-02	B010712		CIRCUIT BD ASSY: DIGITAL STORAGE INTERFACE	80009	670-9099-02
A61A1C1031	285-1062-00			CAP, FXD, PLASTIC: 0.005UF, 1%, 200V	19396	502F02PP460
A61A1C1035	285-1062-00			CAP, FXD, PLASTIC: 0.005UF, 1%, 200V	19396	502F02PP460
A61A1C1039	283-0221-00			CAP, FXD, CER DI: 0.47UF, 20%, 50V	04222	SR305C474MAA
A61A1C1045	283-0197-00			CAP, FXD, CER DI: 470PF, 5%, 50V	04222	SR205A471JAA
A61A1C2034	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A61A1C2035	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A61A1C2045	283-0197-00			CAP, FXD, CER DI: 470PF, 5%, 50V	04222	SR205A471JAA
A61A1C3035	283-0346-00			CAP, FXD, CER DI: 0.47UF, +80-20%, 100V	20932	5034ES100RD474Z
A61A1C3036	283-0139-00	B010100	B010431	CAP, FXD, CER DI: 150PF, 20%, 50V	05397	C312C151M5G5CA
A61A1C3037	290-0527-00			CAP, FXD, ELCTLT: 15UF, 20%, 20V	05397	T368B156M020AS
A61A1C3040	290-0527-00			CAP, FXD, ELCTLT: 15UF, 20%, 20V	05397	T368B156M020AS
A61A1C3045	290-0527-00			CAP, FXD, ELCTLT: 15UF, 20%, 20V	05397	T368B156M020AS
A61A1C3046	290-0527-00			CAP, FXD, ELCTLT: 15UF, 20%, 20V	05397	T368B156M020AS
A61A1L4035	108-0537-00			COIL, RF: FIXED, 200UH	80009	108-0537-00
A61A1L4036	108-0537-00			COIL, RF: FIXED, 200UH	80009	108-0537-00
A61A1L4045	108-0537-00			COIL, RF: FIXED, 200UH	80009	108-0537-00
A61A1L4046	108-0537-00			COIL, RF: FIXED, 200UH	80009	108-0537-00
A61A1Q4045	151-0302-00			TRANSISTOR: NPN, SI, TO-18	04713	ST899
A61AIR1014	315-0102-00			RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A61AIR1015	307-0446-00			RES, VAR, NONWW: TRMR, 250 OHM, 0.5W	11236	750-101-R10K
A61AIR1033	311-1236-00			RES, VAR, NONWW: TRMR, 250 OHM, 0.5W	32997	3386X-T07-251
A61AIR1034	311-1236-00			RES, VAR, NONWW: TRMR, 250 OHM, 0.5W	32997	3386X-T07-251
A61AIR1035	321-0188-00			RES, FXD, FILM: 887 OHM, 1%, 0.125W, TC=TO	07716	CEAD887ROF
A61AIR1036	321-0218-00			RES, FXD, FILM: 1.82K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K82F
A61AIR1037	321-0360-00			RES, FXD, FILM: 54.9K OHM, 1%, 0.125W, TC=TO	19701	5033ED54K90F
A61AIR1043	321-0395-00			RES, FXD, FILM: 127K OHM, 1%, 0.125W, TC=TO	07716	CEAD12702F
A61AIR1044	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A61AIR1045	311-1198-00			RES, VAR, NONWW: TRMR, 20K OHM, 0.5W	32997	3386X-T07-203
A61AIR1046	311-1198-00			RES, VAR, NONWW: TRMR, 20K OHM, 0.5W	32997	3386X-T07-203
A61AIR2035	315-0102-00			RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A61AIR2036	315-0102-00			RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A61AIR2037	321-0267-00			RES, FXD, FILM: 5.90K OHM, 1%, 0.125W, TC=TO	19701	5033ED5K900F
A61AIR2038	321-0201-00			RES, FXD, FILM: 1.21K OHM, 1%, 0.125W, TC=TO	19701	5043ED1K210F
A61AIR2044	321-0188-00			RES, FXD, FILM: 887 OHM, 1%, 0.125W, TC=TO	07716	CEAD887ROF
A61AIR2045	315-0105-00			RES, FXD, FILM: 1M OHM, 5%, 0.25W	19701	5043CX1M000J
A61AIR2046	321-0364-00			RES, FXD, FILM: 60.4K OHM, 1%, 0.125W, TC=TO	19701	5043ED60K40F
A61AIR2047	321-0222-00			RES, FXD, FILM: 2.00K OHM, 1%, 0.125W, TC=TO	19701	5033ED2K00F

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discnt	Name & Description	Mfr. Code	Mfr. Part No.
A61A1R2048	321-0395-00			RES,FXD,FILM:127K OHM,1%,0.125W,TC=TO	07716	CEAD12702F
A61A1R3035	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A61A1R3036	321-0260-00	B010100	B010431	RES,FXD,FILM:4.99K OHM,1%,0.125W,TC=TO	19701	5033ED4K990F
A61A1R4014	307-0446-00			RES NTWK,FXD,FI:10K OHM,20%,(9)RES	11236	750-101-R10K
A61A1R4035	317-0153-00	B010100	B010431	RES,FXD,CMPSN:15K OHM,5%,0.125W	01121	BB1535
A61A1R4044	321-0402-00			RES,FXD,FILM:150K OHM,1%,0.125W,TC=TO	19701	5033ED150K0F
A61A1R4045	321-0327-00	B010100	B010711	RES,FXD,FILM:24.9K OHM,1%,0.125W,TC=TO	07716	CEAD24901F
A61A1R4045	321-0333-00	B010712		RES,FXD,FILM:28.7K OHM,1%,0.125W,TC=TO	19701	5043ED28K70F
A61A1R4046	321-0385-00	B010100	B010711	RES,FXD,FILM:100K OHM,1%,0.125W,TC=TO	19701	5033ED100K0F
A61A1R4046	321-0387-00	B010712		RES,FXD,FILM:105K OHM,1%,0.125W,TC=TO	07716	CEAD10502F
A61A1S1015	260-1721-00			SWITCH,ROCKER:8,SPST,125MA,30VDC	81073	765B08S
A61A1U1010	156-0388-03			MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	80009	156-0388-03
A61A1U1035	156-1255-00			MICROCKT,LINER:D/A CONVERTER,8 BIT	06665	DAC08-157Q
A61A1U1040	156-0742-02			MICROCKT,LINER:OPNL AMPL,SELECTED	27014	LM318N/A+
A61A1U1045	156-0742-02			MICROCKT,LINER:OPNL AMPL,SELECTED	27014	LM318N/A+
A61A1U2010	156-0382-02			MICROCKT,DGTL:QUAD 2 INP NAND GATE BURN	80009	156-0382-02
A61A1U2015	156-0383-02			MICROCKT,DGTL:QUAD 2-INP NOR GATE,SCRN,	80009	156-0383-02
A61A1U2020	156-0994-02			MICROCKT,DGTL:8 INPUT DATA SEL/MUX,SCRN	80009	156-0994-02
A61A1U2025	156-0865-02			MICROCKT,DGTL:OCTAL D FF W/CLEAR,SCRN	80009	156-0865-02
A61A1U2026	156-0392-03			MICROCKT,DGTL:QUAD LATCH W/CLEAR,SCRN,	80009	156-0392-03
A61A1U2027	156-0388-03			MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	80009	156-0388-03
A61A1U2028	156-0865-02			MICROCKT,DGTL:OCTAL D FF W/CLEAR,SCRN	80009	156-0865-02
A61A1U2030	155-0157-00	B010100	B010431	MICROCKT,DGTL:DIGITAL STORAGE VERTICAL	80009	155-0157-00
A61A1U2030	156-2454-00	B010432		MICROCKT,DGTL:CMOS,GATE ARRAY	TK1881	3H-2185-AA
A61A1U2034	156-0330-02			MICROCKT,DGTL:HEX BUFFER,SCREENED	02735	CD4050BFX
A61A1U2035	156-1226-00			MICROCKT,LINER:DUAL COMPARATOR	18324	LM319F
A61A1U2040	156-1211-00			MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	27014	LF13333N
A61A1U2045	156-0742-02			MICROCKT,LINER:OPNL AMPL,SELECTED	27014	LM318N/A+
A61A1U3010	156-0480-02			MICROCKT,DGTL:QUAD 2-INP & GATE,SCRN,	80009	156-0480-02
A61A1U3015	156-0718-03			MICROCKT,DGTL:TRIPLE 3-INP NOR GATE,SCRN	80009	156-0718-03
A61A1U3020	156-0388-03			MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	80009	156-0388-03
A61A1U3024	156-0382-02			MICROCKT,DGTL:QUAD 2 INP NAND GATE BURN	80009	156-0382-02
A61A1U3025	156-1255-00			MICROCKT,LINER:D/A CONVERTER,8 BIT	06665	DAC08-157Q
A61A1U3030	156-0172-02	B010100	B010431	MICROCKT,DGTL:QUAD REPRIG MONOSTABLE MV	07263	74123PCQR
A61A1U3040	156-0742-02			MICROCKT,LINER:OPNL AMPL,SELECTED	27014	LM318N/A+
A61A1U3045	156-0067-12			MICROCKT,LINER:OPERATIONAL AMPLIFIER	01295	UA741CJG
A61A1U4010	156-0385-02			MICROCKT,DGTL:HEX INVERTER,SCRN	80009	156-0385-02
A61A1U4015	156-0994-02			MICROCKT,DGTL:8 INPUT DATA SEL/MUX,SCRN	80009	156-0994-02
A61A1U4020	156-0975-02			MICROCKT,DGTL:UNIV SHIFT/STORAGE REGISTER	34335	DM74LS299N-B
A61A1U4025	156-0469-02			MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A61A1U4030	156-0385-02			MICROCKT,DGTL:HEX INVERTER,SCRN	80009	156-0385-02
A61A1U4040	156-0382-02			MICROCKT,DGTL:QUAD 2 INP NAND GATE BURN	80009	156-0382-02
A62	672-1120-00			CIRCUIT BD ASSY:LOG AMP	80009	672-1120-00
A62A1	670-8008-01	B010100	B010266	CIRCUIT BD ASSY:LOG & VIDEO AMP	80009	670-8008-01
A62A1	670-8008-02	B010267		CIRCUIT BD ASSY:LOG AMP	80009	670-8008-02
A62A1C1018	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C1019	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C1031	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C1033	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C1041	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C1043	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C1049	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C1051	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A62A1C1061	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C1062	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C1063	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C1069	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A62A1C1071	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA



Component No.	Tektronix	Serial/Assembly No.		Name & Description	Mfr.	Mfr. Part No.
	Part No.	Effective	Discort		Code	
A62A1C1072	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C1073	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C1089	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C1099	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C1108	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C2031	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C2033	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C2043	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C2052	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A62A1C2054	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C2062	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A62A1C2085	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C2088	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C2090	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C2098	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C2105	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C3011	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A62A1C3025	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C3035	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C3041	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A62A1C3049	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A62A1C3069	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C3071	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A62A1C3082	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C3098	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C3099	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C3100	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C3102	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C3105	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C3111	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C4011	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C4016	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C4027	283-0201-00			CAP,FXD,CER DI:27PF,10%,200V	04222	SR152C270KAA
A62A1C4029	283-0177-00			CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A62A1C4039	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C4041	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C4044	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C4045	283-0177-00			CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A62A1C4097	283-0181-00			CAP,FXD,CER DI:1.8PF,+/-0.1%,100V	51642	100 100NP0189B
A62A1C5014	283-0191-00			CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A62A1C5024	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A62A1C5029	283-0177-00			CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A62A1C5035	283-0000-00			CAP,FXD,CER DI:0.001UF,+100-0%,500V	59660	831-610-Y5U0102P
A62A1C5039	283-0000-00			CAP,FXD,CER DI:0.001UF,+100-0%,500V	59660	831-610-Y5U0102P
A62A1C5082	283-0140-00			CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A62A1C5085	283-0160-00			CAP,FXD,CER DI:1.5PF,+/-0.1PF,50V	51642	100050NP0159B
A62A1C5103	283-0339-00			CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA
A62A1C6021	283-0648-00			CAP,FXD,MICA DI:10PF,+/-0.5PF,500V	00853	D155C10000
A62A1C6023	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A62A1C6029	283-0156-00			CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A62A1C6033	290-0574-00			CAP,FXD,ELCTLT:47UF,10%,20V	05397	T368C476K0202AS
A62A1C7011	283-0639-00			CAP,FXD,MICA DI:56PF,1%,500V	00853	D155E560F0
A62A1C7014	283-0641-00			CAP,FXD,MICA DI:180PF,1%,100V	00853	D155F181F0
A62A1C7021	283-0599-00			CAP,FXD,MICA DI:98PF,5%,500V	00853	D105F980J0
A62A1C7024	283-0728-00			CAP,FXD,MICA DI:120PF,1%,500V	00853	D155F121F0
A62A1C7032	290-0574-00			CAP,FXD,ELCTLT:47UF,10%,20V	05397	T368C476K0202AS
A62A1C7033	290-0574-00			CAP,FXD,ELCTLT:47UF,10%,20V	05397	T368C476K0202AS
A62A1C7073	283-0203-00			CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR305SC474MAA

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A62A1C7082	290-0574-00		CAP,FXD,ELCLT:47UF,10%,20V	05397	T368C476K0202AS
A62A1C7093	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A62A1C7107	283-0157-00		CAP,FXD,CER DI:7PF,5%,50V	04222	SR155A7R0DAA
A62A1C8104	283-0114-00		CAP,FXD,CER DI:1500PF,5%,200V	59660	805-534-Y5D0152J
A62A1CR1061	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR2014	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR2015	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR2031	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR2032	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR2044	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR2045	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR2062	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR2065	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR2066	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR2074	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR2075	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR2076	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR2077	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR2087	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR2088	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR2089	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR3089	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR4012	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR4015	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR4097	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR4103	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A62A1CR5027	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR5033	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A62A1CR5081	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A62A1CR7103	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A62A1CR8107	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A62A1L1051	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A62A1L2011	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A62A1L2015	108-0443-00		COIL,RF:FIXED,23.5UH	80009	108-0443-00
A62A1L2025	108-0443-00		COIL,RF:FIXED,23.5UH	80009	108-0443-00
A62A1L2041	108-0443-00		COIL,RF:FIXED,23.5UH	80009	108-0443-00
A62A1L2052	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A62A1L2055	108-0443-00		COIL,RF:FIXED,23.5UH	80009	108-0443-00
A62A1L2071	108-0443-00		COIL,RF:FIXED,23.5UH	80009	108-0443-00
A62A1L2085	108-0443-00		COIL,RF:FIXED,23.5UH	80009	108-0443-00
A62A1L3041	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A62A1L3061	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A62A1L6011	108-0702-00		COIL,RF:FIXED,36UH	80009	108-0702-00
A62A1L8021	108-0443-00		COIL,RF:FIXED,23.5UH	80009	108-0443-00
A62A1Q1025	151-0192-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS8801
A62A1Q1035	151-0192-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS8801
A62A1Q1050	151-0192-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS8801
A62A1Q1070	151-0192-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS8801
A62A1Q1080	151-0192-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS8801
A62A1Q1095	151-0192-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS8801
A62A1Q2105	151-0192-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS8801
A62A1Q3015	151-0192-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS8801
A62A1Q3030	151-0192-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS8801
A62A1Q3045	151-0192-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS8801
A62A1Q3055	151-0192-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS8801
A62A1Q3075	151-0192-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS8801
A62A1Q3090	151-0192-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS8801
A62A1Q3100	151-0192-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS8801

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A62AIQ3105	151-0192-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS8801
A62AIQ4025	151-0333-00		TRANSISTOR:SELECTED	04713	SPS1752
A62AIQ4030	151-0221-00		TRANSISTOR:PNP,SI,TO-92	80009	151-0221-00
A62AIQ4035	151-0221-00		TRANSISTOR:PNP,SI,TO-92	80009	151-0221-00
A62AIQ4070	151-1059-00		TRANSISTOR:FET,N-CHAN,30MW,TO-92 CASE	04713	ORDER BY DESC
A62AIQ4075	151-1059-00		TRANSISTOR:FET,N-CHAN,30MW,TO-92 CASE	04713	ORDER BY DESC
A62AIQ4100	151-0192-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS8801
A62AIQ5070	151-1059-00		TRANSISTOR:FET,N-CHAN,30MW,TO-92 CASE	04713	ORDER BY DESC
A62AIQ5075	151-1059-00		TRANSISTOR:FET,N-CHAN,30MW,TO-92 CASE	04713	ORDER BY DESC
A62AIQ5090	151-1059-00		TRANSISTOR:FET,N-CHAN,30MW,TO-92 CASE	04713	ORDER BY DESC
A62AIQ5095	151-1059-00		TRANSISTOR:FET,N-CHAN,30MW,TO-92 CASE	04713	ORDER BY DESC
A62AIQ6010	151-0192-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS8801
A62AIQ6090	151-0221-00		TRANSISTOR:PNP,SI,TO-92	80009	151-0221-00
A62AIQ6095	151-0221-00		TRANSISTOR:PNP,SI,TO-92	80009	151-0221-00
A62AIQ6110	151-0221-00		TRANSISTOR:PNP,SI,TO-92	80009	151-0221-00
A62AIQ6115	151-0221-00		TRANSISTOR:PNP,SI,TO-92	80009	151-0221-00
A62AIQ7110	151-1059-00		TRANSISTOR:FET,N-CHAN,30MW,TO-92 CASE	04713	ORDER BY DESC
A62AIR1024	321-0155-00		RES,FXD,FILM:402 OHM,1%,0.125W,TC=TO	07716	CEAD402ROF
A62AIR1035	321-0111-00		RES,FXD,FILM:140 OHM,1%,0.125W,TC=TO	07716	CEAD140ROF
A62AIR1045	321-0111-00		RES,FXD,FILM:140 OHM,1%,0.125W,TC=TO	07716	CEAD140ROF
A62AIR1056	321-0079-00		RES,FXD,FILM:64.9 OHM,1%,0.125W,TC=TO	91637	CMF55116G64R90F
A62AIR1070	321-0325-00		RES,FXD,FILM:23.7K OHM,1%,0.125W,TC=TO	07716	CEAD23701F
A62AIR1076	321-0065-00		RES,FXD,FILM:46.4 OHM,1%,0.125W,TC=TO	57668	RB14FXE 46E4
A62AIR1083	321-0325-00		RES,FXD,FILM:23.7K OHM,1%,0.125W,TC=TO	07716	CEAD23701F
A62AIR1084	321-0325-00		RES,FXD,FILM:23.7K OHM,1%,0.125W,TC=TO	07716	CEAD23701F
A62AIR1085	311-1277-00		RES,VAR,NONWV:TRMR,100 OHM,0.5W	32997	3329S-L58-101
A62AIR1086	321-0126-00		RES,FXD,FILM:200 OHM,1%,0.125W,TC=TO	19701	5033ED200ROF
A62AIR1097	321-0325-00		RES,FXD,FILM:23.7K OHM,1%,0.125W,TC=TO	07716	CEAD23701F
A62AIR1101	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A62AIR1111	321-0068-00		RES,FXD,FILM:49.9 OHM,0.1%,0.125W,TC=TO	91637	CMF55116G49R90F
A62AIR1112	315-0680-00		RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A62AIR2023	321-0111-00		RES,FXD,FILM:140 OHM,1%,0.125W,TC=TO	07716	CEAD140ROF
A62AIR2065	321-0276-00		RES,FXD,FILM:7.32K OHM,1%,0.125W,TC=TO	19701	5043ED7K320F
A62AIR2066	321-0234-00		RES,FXD,FILM:2.67K OHM,1%,0.125W,TC=TO	19701	5033ED2K67F
A62AIR2076	321-0253-00		RES,FXD,FILM:4.22K OHM,1%,0.125W,TC=TO	19701	5033ED 4K 220F
A62AIR2078	321-0291-00		RES,FXD,FILM:10.5K OHM,1%,0.125W,TC=TO	19701	5033ED10K50F
A62AIR2100	321-0187-00		RES,FXD,FILM:866 OHM,1%,0.125W,TC=TO	07716	CEAD866ROF
A62AIR2101	321-0271-00		RES,FXD,FILM:6.49K OHM,1%,0.125W,TC=TO	07716	CEAD64900F
A62AIR3020	307-0610-00		RES NTWK,FXD,FI:LOG AMP RES PACK	80009	307-0610-00
A62AIR3035	307-0610-00		RES NTWK,FXD,FI:LOG AMP RES PACK	80009	307-0610-00
A62AIR3050	307-0610-00		RES NTWK,FXD,FI:LOG AMP RES PACK	80009	307-0610-00
A62AIR3065	307-0610-00		RES NTWK,FXD,FI:LOG AMP RES PACK	80009	307-0610-00
A62AIR3080	307-0610-00		RES NTWK,FXD,FI:LOG AMP RES PACK	80009	307-0610-00
A62AIR3082	321-0294-00		RES,FXD,FILM:11.3K OHM,1%,0.125W,TC=TO	19701	5043ED11K30F
A62AIR3092	315-0302-00		RES,FXD,FILM:3K OHM,5%,0.25W	57668	NTR25J-E03K0
A62AIR3095	307-0610-00		RES NTWK,FXD,FI:LOG AMP RES PACK	80009	307-0610-00
A62AIR3099	315-0471-00		RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A62AIR3101	321-0187-00		RES,FXD,FILM:866 OHM,1%,0.125W,TC=TO	07716	CEAD866ROF
A62AIR3102	321-0106-00		RES,FXD,FILM:124 OHM 1%,0.125W,TC=TO	80009	321-0106-00
A62AIR3105	321-0089-00		RES,FXD,FILM:82.5 OHM,1%,0.125W,TC=TO	91637	CMF55116G82R50F
A62AIR3109	315-0241-00		RES,FXD,FILM:240 OHM,5%,0.25W	19701	5043CX240R0J
A62AIR3110	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A62AIR3111	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A62AIR4010	307-0610-00		RES NTWK,FXD,FI:LOG AMP RES PACK	80009	307-0610-00
A62AIR4015	321-0111-00		RES,FXD,FILM:140 OHM,1%,0.125W,TC=TO	07716	CEAD140ROF
A62AIR4020	311-1279-00		RES,VAR,NONWV:TRMR,500 OHM,0.5W	32997	3329S-L58-501
A62AIR4025	315-0302-00		RES,FXD,FILM:3K OHM,5%,0.25W	57668	NTR25J-E03K0
A62AIR4026	315-0302-00		RES,FXD,FILM:3K OHM,5%,0.25W	57668	NTR25J-E03K0

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A62A1R4027	315-0560-00		RES,FXD,FILM:56 OHM,5%,0.25W	57668	NTR25J-E56E0
A62A1R4031	315-0751-00		RES,FXD,FILM:750 OHM,5%,0.25W	57668	NTR25J-E750E
A62A1R4032	315-0910-00		RES,FXD,FILM:91 OHM,5%,0.25W	19701	5043CX91R00J
A62A1R4034	315-0300-00		RES,FXD,FILM:30 OHM,5%,0.25W	19701	5043CX30R00J
A62A1R4036	315-0300-00		RES,FXD,FILM:30 OHM,5%,0.25W	19701	5043CX30R00J
A62A1R4038	321-0235-00		RES,FXD,FILM:2.74K OHM,1%,0.125W,TC=TO	07716	CEAD27400F
A62A1R4039	321-0223-00		RES,FXD,FILM:2.05K OHM,1%,0.125W,TC=TO	19701	5033ED2K05F
A62A1R4045	323-0126-00		RES,FXD,FILM:200 OHM,1%,0.5W,TC=TO	75042	CECT0-2000F
A62A1R4046	301-0102-00		RES,FXD,CMPNSN:1K OHM,5%,0.50W	19701	5053CX1K000J
A62A1R4050	321-0041-00		RES,FXD,FILM:26.1 OHM,1%,0.125W,TC=TO	91637	CMF55116G26R10F
A62A1R4051	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A62A1R4052	311-1245-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3386X-DY6-103
A62A1R4061	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A62A1R4062	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A62A1R4064	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A62A1R4071	311-1245-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3386X-DY6-103
A62A1R4072	321-0452-00		RES,FXD,FILM:499K OHM,1%,0.125W,TC=TO	19701	5043ED499K0F
A62A1R4074	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A62A1R4081	311-1245-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3386X-DY6-103
A62A1R4082	321-0330-00		RES,FXD,FILM:26.7K OHM,1%,0.125W,TC=TO	07716	CEAD26701F
A62A1R4083	321-0424-00		RES,FXD,FILM:255K OHM,1%,0.125W,TC=TO	07716	CEAD25502F
A62A1R4084	321-0431-00		RES,FXD,FILM:301K OHM,1%,0.125W,TC=TO	07716	CEAD30102F
A62A1R4085	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A62A1R4091	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A62A1R4092	321-0431-00		RES,FXD,FILM:301K OHM,1%,0.125W,TC=TO	07716	CEAD30102F
A62A1R4093	321-0324-00		RES,FXD,FILM:23.2K OHM,1%,0.125W,TC=TO	07716	CEAD23201F
A62A1R4094	321-0243-00		RES,FXD,FILM:3.32K OHM,1%,0.125W,TC=TO	19701	5033ED3K32F
A62A1R4095	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A62A1R4096	321-0385-00		RES,FXD,FILM:100K OHM,1%,0.125W,TC=TO	19701	5033ED100K0F
A62A1R4097	321-0349-00		RES,FXD,FILM:42.2K OHM,1%,0.125W,TC=TO	07716	CEAD42201F
A62A1R4098	315-0202-00		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A62A1R4099	315-0102-00	6010267	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A62A1R4103	315-0362-00		RES,FXD,FILM:3.6K OHM,5%,0.25W	19701	5043CX3K600J
A62A1R4105	321-0172-00		RES,FXD,FILM:604 OHM,1%,0.125W,TC=TO	19701	5033ED604R0F
A62A1R4107	321-0171-00		RES,FXD,FILM:590 OHM,1%,0.125W,TC=TO	19701	5033ED590R0F
A62A1R4109	321-0170-00		RES,FXD,FILM:576 OHM,1%,0.125W,TC=TO	07716	CEAD576R0F
A62A1R5015	321-0139-00		RES,FXD,FILM:274 OHM,1%,0.125W,TC=TO	07716	CEAD274R0F
A62A1R5020	321-0193-00		RES,FXD,FILM:1K OHM,1%,0.125W,TC=TO	19701	5033ED1K00F
A62A1R5021	321-0389-00		RES,FXD,FILM:110K OHM,1%,0.125W,TC=TO	07716	CEAD11002F
A62A1R5022	321-0423-00		RES,FXD,FILM:249K OHM,1%,0.125W,TC=TO	19701	5043ED249K0F
A62A1R5024	315-0510-00		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A62A1R5025	315-0751-00		RES,FXD,FILM:750 OHM,5%,0.25W	57668	NTR25J-E750E
A62A1R5027	321-0126-00		RES,FXD,FILM:200 OHM,1%,0.125W,TC=TO	19701	5033ED200R0F
A62A1R5028	321-0164-00		RES,FXD,FILM:499 OHM,1%,0.125W,TC=TO	19701	5033ED499R0F
A62A1R5029	321-0268-00		RES,FXD,FILM:6.04K OHM,1%,0.125W,TC=TO	19701	5043ED6K040F
A62A1R5031	315-0181-00		RES,FXD,FILM:180 OHM,5%,0.25W	57668	NTR25J-E180E
A62A1R5032	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A62A1R5033	321-0126-00		RES,FXD,FILM:200 OHM,1%,0.125W,TC=TO	19701	5033ED200R0F
A62A1R5034	321-0193-00		RES,FXD,FILM:1K OHM,1%,0.125W,TC=TO	19701	5033ED1K00F
A62A1R5082	321-0290-00		RES,FXD,FILM:10.2K OHM,1%,0.125W,TC=TO	19701	5043ED10K20F
A62A1R5084	321-0239-00		RES,FXD,FILM:3.01K OHM,1%,0.125W,TC=TO	19701	5043ED3K010F
A62A1R5085	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A62A1R5086	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A62A1R5088	321-0309-00		RES,FXD,FILM:16.2K OHM,1%,0.125W,TC=TO	19701	5033ED16K20F
A62A1R5089	315-0473-00		RES,FXD,FILM:47K OHM,5%,0.25W	57668	NTR25J-E47K0
A62A1R5103	321-0348-00		RES,FXD,FILM:41.2K OHM,1%,0.125W,TC=TO	19701	5043ED41K20F
A62A1R5105	321-0299-00		RES,FXD,FILM:12.7K OHM,1%,0.125W,TC=TO	19701	5033ED12K70F
A62A1R5107	321-0236-00		RES,FXD,FILM:2.80K OHM,1%,0.125W,TC=TO	07716	CEAD28000F

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A62A1R5109	315-0473-00			RES,FXD,FILM:47K OHM,5%,0.25W	57668	NTR25J-E47K0
A62A1R5111	321-0150-00			RES,FXD,FILM:357 OHM,1%,0.125W,TC=TO	07716	CEAD357R0F
A62A1R6023	315-0273-00			RES,FXD,FILM:27K OHM,5%,0.25W	57668	NTR25J-E27K0
A62A1R6024	307-0106-00			RES,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB 47G5
A62A1R6029	315-0510-00			RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A62A1R6072	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A62A1R6073	321-0318-00			RES,FXD,FILM:20.0K OHM,1%,0.125W,TC=TO	19701	5033ED20K00F
A62A1R6074	321-0347-00			RES,FXD,FILM:40.2K OHM,1%,0.125W,TC=TO	91637	CMF55116G40201F
A62A1R6079	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A62A1R6080	321-0376-00			RES,FXD,FILM:80.6K OHM,1%,0.125W,TC=TO	19701	5043ED80K60F
A62A1R6081	321-0164-00			RES,FXD,FILM:499 OHM,1%,0.125W,TC=TO	19701	5033ED499R0F
A62A1R6082	321-0289-00			RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A62A1R6087	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A62A1R6091	321-0389-00			RES,FXD,FILM:110K OHM,1%,0.125W,TC=TO	07716	CEAD11002F
A62A1R6107	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A62A1R6108	321-0289-00			RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A62A1R6111	321-0300-00			RES,FXD,FILM:13.0K OHM,1%,0.125W,TC=TO	07716	CEAD13001F
A62A1R6113	315-0272-00			RES,FXD,FILM:2.7K OHM,5%,0.25W	57668	NTR25J-E02K7
A62A1R7074	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A62A1R7075	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A62A1R7083	307-0106-00			RES,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB 47G5
A62A1R7085	321-0242-00			RES,FXD,FILM:3.24K OHM,1%,0.125W,TC=TO	19701	5043ED3K240F
A62A1R7086	315-0470-00			RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A62A1R7087	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A62A1R7090	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A62A1R7092	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A62A1R7094	321-0321-00			RES,FXD,FILM:21.5K OHM,1%,0.125W,TC=TO	07716	CEAD21501F
A62A1R7095	315-0470-00			RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A62A1R7096	321-0387-00			RES,FXD,FILM:105K OHM,1%,0.125W,TC=TO	07716	CEAD10502F
A62A1R7097	321-0423-00			RES,FXD,FILM:249K OHM,1%,0.125W,TC=TO	19701	5043ED249K0F
A62A1R7099	321-0406-00			RES,FXD,FILM:165K OHM,1%,0.125W,TC=TO	07716	CEAD16502F
A62A1R7105	315-0753-00			RES,FXD,FILM:75K OHM,5%,0.25W	57668	NTR25J-E75K0
A62A1R7107	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A62A1R7111	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A62A1R8020	321-0296-00			RES,FXD,FILM:11.8K OHM,1%,0.125W,TC=TO	07716	CEAD11801F
A62A1R8021	321-0296-00			RES,FXD,FILM:11.8K OHM,1%,0.125W,TC=TO	07716	CEAD11801F
A62A1R8031	307-0106-00			RES,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB 47G5
A62A1R8034	307-0106-00			RES,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB 47G5
A62A1R8103	315-0105-00			RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A62A1R8106	315-0754-00			RES,FXD,FILM:750K OHM,5%,0.25W,MI	19701	5043CX750K0J
A62A1U4090	155-0116-00			MICROCKT,LINER:QUAD OPNL AMPL	80009	155-0116-00
A62A1U5041	156-0509-03			MICROCKT,DGTL:0/A CONVERTER,8 BIT BIN,SCRN	04713	MC1408L8DS
A62A1U5060	156-0411-02			MICROCKT,LINER:QUAD COMPARTOR,SCREENED	04713	LM339JDS
A62A1U5070	156-0385-02			MICROCKT,DGTL:HEX INVERTER,SCRN	80009	156-0385-02
A62A1U6040	156-0913-02			MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A62A1U6050	156-0913-02			MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A62A1U6060	156-0411-02			MICROCKT,LINER:QUAD COMPARTOR,SCREENED	04713	LM339JDS
A62A1U6070	156-0469-02			MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A62A1W1023	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A62A1W2013	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A64	672-0162-00	B010100	B010139	CIRCUIT BD ASSY:DEFL AMP	80009	672-0162-00
A64	672-0162-01	B010140	B010453	CIRCUIT BD ASSY:DEFL AMP	80009	672-0162-01
A64	672-0162-02	B010454	B010701	CIRCUIT BD ASSY:DEFL AMP	80009	672-0162-02
A64	672-0162-03	B010702	B010706	CIRCUIT BD ASSY:DEFLECTION AMP	80009	672-0162-03
A64	672-0162-04	B010707		CIRCUIT BD ASSY:DEFLECTION AMP	80009	672-0162-04
A64A1	670-8083-00	B010100	B010139	CIRCUIT BD ASSY:DEFL AMP	80009	670-8083-00
A64A1	670-8083-01	B010140	B010453	CIRCUIT BD ASSY:DEFLECTION AMP	80009	670-8083-01
A64A1	670-8083-02	B010454	B010701	CIRCUIT BD ASSY:DEFL AMP	80009	670-8083-02

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A64A1	671-0372-00	B010702	B010706	CIRCUIT BD ASSY:DEFLECTION AMP	80009	671-0372-00
A64A1	671-0372-01	B010707		CIRCUIT BD ASSY:DEFLECTION AMP	80009	671-0372-01
A64A1C1018	283-0006-00	B010100	B010701	CAP, FXD, CER DI:0.02UF, +80-20%, 500V	59660	0841545Z5V00203Z
A64A1C1023	283-0203-00	B010100	B010701	CAP, FXD, CER DI:0.47UF, 20%, 50V	04222	SR305SC474MAA
A64A1C1030	281-0226-00	B010702		CAP, VAR, PLASTIC:4-38PF, 100V	52769	GXD38000
A64A1C1040	281-0226-00	B010702		CAP, VAR, PLASTIC:4-38PF, 100V	52769	GXD38000
A64A1C1049	283-0203-00	B010100	B010701	CAP, FXD, CER DI:0.47UF, 20%, 50V	04222	SR305SC474MAA
A64A1C1066	283-0158-00	B010702		CAP, FXD, CER DI:1PF, +/-0.1PF, 50V	51642	100-050-NPO-109B
A64A1C1100	283-0187-00	B010702		CAP, FXD, CER DI:0.047UF, 10%, 400V	04222	SR308C473KAA
A64A1C2010	281-0538-00	B010702		CAP, FXD, CER DI:1PF, 20%, 500V	54583	MA12C0G2H010M
A64A1C2020	283-0139-00	B010707		CAP, FXD, CER DI:150PF, 20%, 50V	05397	C312C151M5G5CA
A64A1C2022	283-0006-00	B010100	B010701	CAP, FXD, CER DI:0.02UF, +80-20%, 500V	59660	0841545Z5V00203Z
A64A1C2028	281-0898-00	B010702		CAP, FXD, CER DI:7.5PF, +/-0.5PF, 500V	96733	XR3446
A64A1C2030	283-0139-00	B010707		CAP, FXD, CER DI:150PF, 20%, 50V	05397	C312C151M5G5CA
A64A1C2031	281-0898-00	B010702		CAP, FXD, CER DI:7.5PF, +/-0.5PF, 500V	96733	XR3446
A64A1C2037	283-0010-00	B010100	B010701	CAP, FXD, CER DI:0.05UF, +80-20%, 50V	04222	SR305E503ZAA
A64A1C2047	283-0317-00	B010100	B010701	CAP, FXD, CER DI:1PF, +/-0.1PF, 500V	59660	861518C0K0109B
A64A1C2047	281-0538-00	B010702		CAP, FXD, CER DI:1PF, 20%, 500V	54583	MA12C0G2H010M
A64A1C2055	283-0140-00	B010100	B010701	CAP, FXD, CER DI:4.7PF, +/-0.25PF, 50V	72982	8101E003A479C
A64A1C2055	283-0167-00	B010702		CAP, FXD, CER DI:0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C2056	283-0330-00	B010702		CAP, FXD, CER DI:100PF, 5%, 50V	05397	C320C101J5R5CA
A64A1C2060	283-0167-00	B010454	B010701	CAP, FXD, CER DI:0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C2062	283-0167-00	B010454		CAP, FXD, CER DI:0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C2066	283-0140-00	B010100	B010701	CAP, FXD, CER DI:4.7PF, +/-0.25PF, 50V	72982	8101E003A479C
A64A1C2073	283-0010-00	B010100	B010701	CAP, FXD, CER DI:0.05UF, +80-20%, 50V	04222	SR305E503ZAA
A64A1C2078	283-0317-00	B010100	B010701	CAP, FXD, CER DI:1PF, +/-0.1PF, 500V	59660	861518C0K0109B
A64A1C2083	283-0006-00	B010100	B010701	CAP, FXD, CER DI:0.02UF, +80-20%, 500V	59660	0841545Z5V00203Z
A64A1C2087	283-0006-00	B010100	B010701	CAP, FXD, CER DI:0.02UF, +80-20%, 500V	59660	0841545Z5V00203Z
A64A1C2101	283-0006-00	B010100	B010701	CAP, FXD, CER DI:0.02UF, +80-20%, 500V	59660	0841545Z5V00203Z
A64A1C2103	283-0006-00	B010100	B010701	CAP, FXD, CER DI:0.02UF, +80-20%, 500V	59660	0841545Z5V00203Z
A64A1C2106	283-0317-00	B010100	B010701	CAP, FXD, CER DI:1PF, +/-0.1PF, 500V	59660	861518C0K0109B
A64A1C3021	283-0317-00	B010100	B010701	CAP, FXD, CER DI:1PF, +/-0.1PF, 500V	59660	861518C0K0109B
A64A1C3030	283-0167-00	B010702		CAP, FXD, CER DI:0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C3031	283-0167-00	B010702		CAP, FXD, CER DI:0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C3039	283-0006-00	B010100	B010701	CAP, FXD, CER DI:0.02UF, +80-20%, 500V	59660	0841545Z5V00203Z
A64A1C3046	283-0187-00	B010702		CAP, FXD, CER DI:0.047UF, 10%, 400V	04222	SR308C473KAA
A64A1C3051	283-0006-00	B010100	B010701	CAP, FXD, CER DI:0.02UF, +80-20%, 500V	59660	0841545Z5V00203Z
A64A1C3060	281-0226-00	B010702		CAP, VAR, PLASTIC:4-38PF, 100V	52769	GXD38000
A64A1C3068	283-0187-00	B010702		CAP, FXD, CER DI:0.047UF, 10%, 400V	04222	SR308C473KAA
A64A1C3075	283-0187-00	B010702		CAP, FXD, CER DI:0.047UF, 10%, 400V	04222	SR308C473KAA
A64A1C3080	281-0226-00	B010702		CAP, VAR, PLASTIC:4-38PF, 100V	52769	GXD38000
A64A1C3092	283-0167-00	B010702		CAP, FXD, CER DI:0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C3095	281-0538-00	B010702		CAP, FXD, CER DI:1PF, 20%, 500V	54583	MA12C0G2H010M
A64A1C3100	281-0538-00	B010702		CAP, FXD, CER DI:1PF, 20%, 500V	54583	MA12C0G2H010M
A64A1C3115	283-0187-00	B010702		CAP, FXD, CER DI:0.047UF, 10%, 400V	04222	SR308C473KAA
A64A1C4028	283-0187-00	B010702		CAP, FXD, CER DI:0.047UF, 10%, 400V	04222	SR308C473KAA
A64A1C4029	283-0167-00	B010702		CAP, FXD, CER DI:0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C4030	283-0187-00	B010702		CAP, FXD, CER DI:0.047UF, 10%, 400V	04222	SR308C473KAA
A64A1C4031	283-0187-00	B010702		CAP, FXD, CER DI:0.047UF, 10%, 400V	04222	SR308C473KAA
A64A1C4048	283-0167-00	B010702		CAP, FXD, CER DI:0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C4057	281-0226-00	B010100	B010701	CAP, VAR, PLASTIC:4-38PF, 100V	52769	GXD38000
A64A1C4061	281-0226-00	B010100	B010701	CAP, VAR, PLASTIC:4-38PF, 100V	52769	GXD38000
A64A1C4069	281-0538-00	B010702		CAP, FXD, CER DI:1PF, 20%, 500V	54583	MA12C0G2H010M
A64A1C4080	283-0139-00	B010707		CAP, FXD, CER DI:150PF, 20%, 50V	05397	C312C151M5G5CA
A64A1C4085	281-0898-00	B010702		CAP, FXD, CER DI:7.5PF, +/-0.5PF, 500V	96733	XR3446
A64A1C4092	281-0898-00	B010702		CAP, FXD, CER DI:7.5PF, +/-0.5PF, 500V	96733	XR3446
A64A1C4096	281-0538-00	B010702		CAP, FXD, CER DI:1PF, 20%, 500V	54583	MA12C0G2H010M
A64A1C4108	283-0167-00	B010702		CAP, FXD, CER DI:0.1UF, 10%, 100V	04222	SR301C104KAA

Component No.	Tektronix	Serial/Assembly No.		Name & Description	Mfr.	Mfr. Part No.
	Part No.	Effective	Dscont		Code	
A64A1C5021	281-0226-00	B010100	B010701	CAP, VAR, PLASTIC:4-38PF, 100V	52769	GXD38000
A64A1C5033	283-0111-00	B010100	B010701	CAP, FXD, CER DI:0.1UF, 20%, 50V	04222	SR305C104MAA
A64A1C5058	283-0111-00	B010100	B010701	CAP, FXD, CER DI:0.1UF, 20%, 50V	04222	SR305C104MAA
A64A1C5070	283-0167-00	B010702		CAP, FXD, CER DI:0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C5071	281-0811-00	B010702		CAP, FXD, CER DI:10PF, 10%, 100V	04222	MA101A100KAA
A64A1C5089	283-0111-00	B010100	B010701	CAP, FXD, CER DI:0.1UF, 20%, 50V	04222	SR305C104MAA
A64A1C5090	283-0139-00	B010707		CAP, FXD, CER DI:150PF, 20%, 50V	05397	C312C151M5G5CA
A64A1C5104	281-0226-00	B010100	B010701	CAP, VAR, PLASTIC:4-38PF, 100V	52769	GXD38000
A64A1C6033	283-0189-00	B010100	B010701	CAP, FXD, CER DI:0.1UF, 20%, 400V	96733	R3014
A64A1C6037	283-0189-00	B010100	B010701	CAP, FXD, CER DI:0.1UF, 20%, 400V	96733	R3014
A64A1C6038	283-0167-00	B010454	B010701	CAP, FXD, CER DI:0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C6058	283-0167-00	B010702		CAP, FXD, CER DI:0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C6064	283-0139-00	B010707		CAP, FXD, CER DI:150PF, 20%, 50V	05397	C312C151M5G5CA
A64A1C6065	283-0167-00	B010454		CAP, FXD, CER DI:0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C6073	283-0181-00	B010100	B010701	CAP, FXD, CER DI:1.8PF, +/-0.1%, 100V	51642	100 100NP0189B
A64A1C6073	283-0167-00	B010702		CAP, FXD, CER DI:0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C6078	283-0181-00	B010702		CAP, FXD, CER DI:1.8PF, +/-0.1%, 100V	51642	100 100NP0189B
A64A1C6081	281-0811-00	B010100	B010701	CAP, FXD, CER DI:10PF, 10%, 100V	04222	MA101A100KAA
A64A1C7015	283-0065-00	B010100	B010701	CAP, FXD, CER DI:0.001UF, 5%, 50V	59660	0835-591Y5E0102J
A64A1C7020	283-0189-00	B010702		CAP, FXD, CER DI:0.1UF, 20%, 400V	96733	R3014
A64A1C7025	283-0189-00	B010702		CAP, FXD, CER DI:0.1UF, 20%, 400V	96733	R3014
A64A1C7035	283-0065-00	B010702		CAP, FXD, CER DI:0.001UF, 5%, 50V	59660	0835-591Y5E0102J
A64A1C7061	283-0177-00			CAP, FXD, CER DI:1UF, +80-20%, 25V	04222	SR305E105ZAA
A64A1C7065	283-0167-00	B010454	B010701	CAP, FXD, CER DI:0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C7071	283-0177-00			CAP, FXD, CER DI:1UF, +80-20%, 25V	04222	SR305E105ZAA
A64A1C7073	283-0177-00			CAP, FXD, CER DI:1UF, +80-20%, 25V	04222	SR305E105ZAA
A64A1C7074	283-0177-00	B010100	B010701	CAP, FXD, CER DI:1UF, +80-20%, 25V	04222	SR305E105ZAA
A64A1C7085	283-0177-00	B010702		CAP, FXD, CER DI:1UF, +80-20%, 25V	04222	SR305E105ZAA
A64A1C7088	283-0177-00	B010100	B010701	CAP, FXD, CER DI:1UF, +80-20%, 25V	04222	SR305E105ZAA
A64A1C7090	283-0177-00	B010702		CAP, FXD, CER DI:1UF, +80-20%, 25V	04222	SR305E105ZAA
A64A1C7093	283-0177-00	B010100	B010701	CAP, FXD, CER DI:1UF, +80-20%, 25V	04222	SR305E105ZAA
A64A1C7100	283-0177-00	B010702		CAP, FXD, CER DI:1UF, +80-20%, 25V	04222	SR305E105ZAA
A64A1CR1080	152-0141-02	B010702		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR1100	152-0141-02	B010702		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR2020	152-0141-02	B010702		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR2040	152-0141-02	B010702		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR3040	152-0141-02	B010702		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR4051	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR4052	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR4056	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR4058	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR4063	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR4064	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR4080	152-0141-02	B010702		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR4100	152-0141-02	B010702		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR5020	152-0141-02	B010702		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR5054	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR5055	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1L7061	108-0395-00			COIL, RF: FIXED, 64UH	80009	108-0395-00
A64A1L7069	108-0395-00			COIL, RF: FIXED, 64UH	80009	108-0395-00
A64A1L7081	108-0395-00	B010100	B010701	COIL, RF: FIXED, 64UH	80009	108-0395-00
A64A1L7088	108-0395-00	B010100	B010701	COIL, RF: FIXED, 64UH	80009	108-0395-00
A64A1L7090	108-0395-00	B010702		COIL, RF: FIXED, 64UH	80009	108-0395-00
A64A1L7100	108-0395-00	B010702		COIL, RF: FIXED, 64UH	80009	108-0395-00
A64A1Q1024	151-0694-01	B010100	B010701	TRANSISTOR: SCREENED	80009	151-0694-01
A64A1Q1031	151-0693-01	B010100	B010701	TRANSISTOR: BURN-IN	80009	151-0693-01
A64A1Q1043	151-0693-01	B010100	B010701	TRANSISTOR: BURN-IN	80009	151-0693-01
A64A1Q1049	151-0694-01	B010100	B010701	TRANSISTOR: SCREENED	80009	151-0694-01

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A64A1Q1070	151-1246-00	B010702		TRANSISTOR:PWR MOSFET,P CHAN,400V,15 OHM	80009	151-1246-00
A64A1Q1072	151-0694-01	B010100	B010701	TRANSISTOR:SCREENED	80009	151-0694-01
A64A1Q1090	151-1246-00	B010702		TRANSISTOR:PWR MOSFET,P CHAN,400V,15 OHM	80009	151-1246-00
A64A1Q1095	151-0694-01	B010100	B010701	TRANSISTOR:SCREENED	80009	151-0694-01
A64A1Q2070	151-1258-00	B010702		TRANSISTOR:PWR MOSFET,N CHAN,400V,8 OHM	80009	151-1258-00
A64A1Q2075	151-0220-00	B010702		TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q2078	151-0693-01	B010100	B010701	TRANSISTOR:BURN-IN	80009	151-0693-01
A64A1Q2090	151-1258-00	B010702		TRANSISTOR:PWR MOSFET,N CHAN,400V,8 OHM	80009	151-1258-00
A64A1Q2095	151-0220-00	B010702		TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q2096	151-0693-01	B010100	B010701	TRANSISTOR:BURN-IN	80009	151-0693-01
A64A1Q3026	151-0220-00	B010702		TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q3027	151-0190-00	B010702		TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A64A1Q3046	151-0220-00	B010702		TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q3047	151-0190-00	B010702		TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A64A1Q3090	151-0220-00	B010702		TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q3095	151-0190-00	B010702		TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A64A1Q4010	151-1246-00	B010702		TRANSISTOR:PWR MOSFET,P CHAN,400V,15 OHM	80009	151-1246-00
A64A1Q4017	151-0220-00	B010100	B010701	TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q4020	151-1258-00	B010702		TRANSISTOR:PWR MOSFET,N CHAN,400V,8 OHM	80009	151-1258-00
A64A1Q4022	151-0220-00	B010100	B010701	TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q4025	151-0261-00	B010100	B010701	TRANSISTOR:PNP,SI,TO-77	80009	151-0261-00
A64A1Q4026	151-0302-00	B010100	B010701	TRANSISTOR:NPN,SI,TO-18	04713	ST899
A64A1Q4030	151-1258-00	B010702		TRANSISTOR:PWR MOSFET,N CHAN,400V,8 OHM	80009	151-1258-00
A64A1Q4035	151-0302-00	B010100	B010701	TRANSISTOR:NPN,SI,TO-18	04713	ST899
A64A1Q4038	151-0261-00	B010100	B010701	TRANSISTOR:PNP,SI,TO-77	80009	151-0261-00
A64A1Q4040	151-1246-00	B010702		TRANSISTOR:PWR MOSFET,P CHAN,400V,15 OHM	80009	151-1246-00
A64A1Q4042	151-0220-00	B010100	B010701	TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q4047	151-0220-00	B010100	B010701	TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q4077	151-0220-00	B010100	B010701	TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q4078	151-0220-00			TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q4083	151-0261-00	B010100	B010701	TRANSISTOR:PNP,SI,TO-77	80009	151-0261-00
A64A1Q4084	151-0220-00	B010100	B010701	TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q4088	151-0302-00	B010100	B010701	TRANSISTOR:NPN,SI,TO-18	04713	ST899
A64A1Q4098	151-0302-00	B010100	B010701	TRANSISTOR:NPN,SI,TO-18	04713	ST899
A64A1Q4101	151-0261-00	B010100	B010701	TRANSISTOR:PNP,SI,TO-77	80009	151-0261-00
A64A1Q4102	151-0220-00	B010100	B010701	TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q4108	151-0220-00	B010100	B010701	TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q5020	151-0220-00	B010702		TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q5040	151-0220-00	B010702		TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q5090	151-0190-00	B010702		TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A64A1Q5095	151-0220-00	B010702		TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1R1010	315-0102-00	B010702		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R1020	315-0153-00	B010702		RES,FXD,FILM:15K OHM,5%,0.25W	19701	5043CX15K00J
A64A1R1022	315-0470-00	B010100	B010701	RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A64A1R1022	321-0378-00	B010702		RES,FXD,FILM:84.5K OHM,1%,0.125W,TC=TO	07716	CEAD84501F
A64A1R1023	315-0392-00	B010100	B010701	RES,FXD,FILM:3.9K OHM,5%,0.25W	57668	NTR25J-E03K9
A64A1R1024	315-0912-00	B010100	B010701	RES,FXD,FILM:9.1K OHM,5%,0.25W	57668	NTR25J-E09K1
A64A1R1025	321-0347-00	B010702		RES,FXD,FILM:40.2K OHM,1%,0.125W,TC=TO	91637	CMF55116G40201F
A64A1R1031	315-0102-00	B010100	B010701	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R1034	315-0470-00	B010100	B010701	RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A64A1R1038	315-0153-00	B010702		RES,FXD,FILM:15K OHM,5%,0.25W	19701	5043CX15K00J
A64A1R1039	321-0347-00	B010702		RES,FXD,FILM:40.2K OHM,1%,0.125W,TC=TO	91637	CMF55116G40201F
A64A1R1044	315-0102-00	B010100	B010701	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R1045	315-0470-00	B010100	B010701	RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A64A1R1049	315-0392-00	B010100	B010701	RES,FXD,FILM:3.9K OHM,5%,0.25W	57668	NTR25J-E03K9
A64A1R1052	315-0912-00	B010100	B010701	RES,FXD,FILM:9.1K OHM,5%,0.25W	57668	NTR25J-E09K1
A64A1R1055	311-1245-00			RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3386X-DY6-103
A64A1R1066	311-1245-00			RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3386X-DY6-103



Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A64A1R1081	315-0102-00	B010100	B010701	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R1082	315-0470-00	B010100	B010701	RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A64A1R1084	315-0751-00	B010100	B010701	RES,FXD,FILM:750 OHM,5%,0.25W	57668	NTR25J-E750E
A64A1R1085	315-0472-00	B010100	B010701	RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A64A1R1085	315-0103-00	B010702		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A64A1R1086	315-0221-00	B010702		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A64A1R1087	315-0751-00	B010100	B010701	RES,FXD,FILM:750 OHM,5%,0.25W	57668	NTR25J-E750E
A64A1R1088	321-0286-00	B010702		RES,FXD,FILM:9.31K OHM,1%,0.125W,TC=TO	19701	5043ED9K310F
A64A1R1090	321-0264-00	B010702		RES,FXD,FILM:5.49K OHM,1%,0.125W,TC=TO	07716	CEAD54900C
A64A1R1100	315-0560-00	B010702		RES,FXD,FILM:56 OHM,5%,0.25W	57668	NTR25J-E56E0
A64A1R1102	315-0472-00	B010100	B010701	RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A64A1R1103	315-0102-00	B010100	B010701	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R1104	315-0470-00	B010100	B010701	RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A64A1R1105	315-0103-00	B010702		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A64A1R2010	315-0102-00	B010702		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R2020	321-0378-00	B010702		RES,FXD,FILM:84.5K OHM,1%,0.125W,TC=TO	07716	CEAD84501F
A64A1R2025	321-0229-00	B010100	B010701	RES,FXD,FILM:2.37K OHM,1%,0.125W,TC=TO	19701	5043ED2K37F
A64A1R2028	315-0391-00	B010702		RES,FXD,FILM:390 OHM,5%,0.25W	57668	NTR25J-E390E
A64A1R2031	321-0347-00	B010702		RES,FXD,FILM:40.2K OHM,1%,0.125W,TC=TO	91637	CMF55116G40201F
A64A1R2035	315-0391-00	B010702		RES,FXD,FILM:390 OHM,5%,0.25W	57668	NTR25J-E390E
A64A1R2041	321-0378-00	B010702		RES,FXD,FILM:84.5K OHM,1%,0.125W,TC=TO	07716	CEAD84501F
A64A1R2049	323-0620-00	B010702		RES,FXD,FILM:800K OHM,1%,0.5W,TC=TO	91637	MFF1226G80002F
A64A1R2057	321-0372-00			RES,FXD,FILM:73.2K OHM,1%,0.125W,TC=TO	07716	CEAD73201F
A64A1R2059	321-0415-00			RES,FXD,FILM:205K OHM,1%,0.125W,TC=TO	07716	CEAD20502F
A64A1R2059	321-0415-00	B010702		RES,FXD,FILM:205K OHM,1%,0.125W,TC=TO	07716	CEAD20502F
A64A1R2062	321-0425-00	B010100	B010701	RES,FXD,FILM:261K OHM,1%,0.125W,TC=TO	07716	CEAD26102F
A64A1R2062	321-0409-00	B010702		RES,FXD,FILM:178K OHM,1%,0.125W,TC=TO	57668	CRB25 FXE 178K
A64A1R2066	321-0380-00	B010100	B010701	RES,FXD,FILM:88.7K OHM,1%,0.125W,TC=TO	07716	CEAD88701F
A64A1R2066	321-0382-00	B010702		RES,FXD,FILM:93.1K OHM,1%,0.125W,TC=TO	07716	CEAD93101F
A64A1R2076	315-0470-00	B010100	B010701	RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A64A1R2079	315-0560-00	B010702		RES,FXD,FILM:56 OHM,5%,0.25W	57668	NTR25J-E56E0
A64A1R2082	315-0102-00	B010702		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R2086	321-0172-00	B010702		RES,FXD,FILM:604 OHM,1%,0.125W,TC=TO	19701	5033ED604R0F
A64A1R2108	315-0102-00	B010702		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R2109	323-0620-00	B010100	B010701	RES,FXD,FILM:800K OHM,1%,0.5W,TC=TO	91637	MFF1226G80002F
A64A1R3010	323-0620-00	B010702		RES,FXD,FILM:800K OHM,1%,0.5W,TC=TO	91637	MFF1226G80002F
A64A1R3023	321-0229-00	B010100	B010701	RES,FXD,FILM:2.37K OHM,1%,0.125W,TC=TO	19701	5043ED2K37F
A64A1R3024	315-0301-00	B010702		RES,FXD,FILM:300 OHM,5%,0.25W	57668	NTR25J-E300E
A64A1R3025	315-0621-00	B010702		RES,FXD,FILM:620 OHM,5%,0.25W	57668	NTR25J-E620E
A64A1R3027	301-0624-00	B010100	B010701	RES,FXD,FILM:620K OHM,5%,0.5W	01121	EB6245
A64A1R3030	315-0470-00	B010702		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A64A1R3031	301-0624-00	B010100	B010701	RES,FXD,FILM:620K OHM,5%,0.5W	01121	EB6245
A64A1R3035	321-0229-00	B010100	B010701	RES,FXD,FILM:2.37K OHM,1%,0.125W,TC=TO	19701	5043ED2K37F
A64A1R3037	321-0229-00	B010100	B010701	RES,FXD,FILM:2.37K OHM,1%,0.125W,TC=TO	19701	5043ED2K37F
A64A1R3038	315-0621-00	B010702		RES,FXD,FILM:620 OHM,5%,0.25W	57668	NTR25J-E620E
A64A1R3040	315-0301-00	B010702		RES,FXD,FILM:300 OHM,5%,0.25W	57668	NTR25J-E300E
A64A1R3045	323-0620-00	B010100	B010701	RES,FXD,FILM:800K OHM,1%,0.5W,TC=TO	91637	MFF1226G80002F
A64A1R3047	315-0560-00	B010702		RES,FXD,FILM:56 OHM,5%,0.25W	57668	NTR25J-E56E0
A64A1R3069	315-0242-00	B010100	B010701	RES,FXD,FILM:2.4K OHM,5%,0.25W	57668	NTR25J-E02K4
A64A1R3070	323-0620-00	B010702		RES,FXD,FILM:800K OHM,1%,0.5W,TC=TO	91637	MFF1226G80002F
A64A1R3084	321-0229-00	B010100	B010701	RES,FXD,FILM:2.37K OHM,1%,0.125W,TC=TO	19701	5043ED2K37F
A64A1R3084	315-0621-00	B010702		RES,FXD,FILM:620 OHM,5%,0.25W	57668	NTR25J-E620E
A64A1R3085	301-0434-00	B010702		RES,FXD,FILM:430K OHM,5%,0.5W	19701	5053CX430K0J
A64A1R3086	321-0229-00	B010100	B010701	RES,FXD,FILM:2.37K OHM,1%,0.125W,TC=TO	19701	5043ED2K37F
A64A1R3088	323-0620-00	B010100	B010701	RES,FXD,FILM:800K OHM,1%,0.5W,TC=TO	91637	MFF1226G80002F
A64A1R3089	303-0304-00	B010100	B010701	RES,FXD,CMPSPN:300K OHM,5%,1W	01121	GB3045
A64A1R3091	321-0378-00	B010100	B010701	RES,FXD,FILM:84.5K OHM,1%,0.125W,TC=TO	07716	CEAD84501F
A64A1R3098	303-0304-00	B010100	B010701	RES,FXD,CMPSPN:300K OHM,5%,1W	01121	GB3045

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A64AIR3099	315-0560-00	B010702		RES, FXD, FILM: 56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A64AIR3107	321-0378-00	B010100	B010701	RES, FXD, FILM: 84.5K OHM, 1%, 0.125W, TC=TO	07716	CEAD84501F
A64AIR3107	315-0221-00	B010702		RES, FXD, FILM: 220 OHM, 5%, 0.25W	57668	NTR25J-E220E
A64AIR3108	321-0172-00	B010702		RES, FXD, FILM: 604 OHM, 1%, 0.125W, TC=TO	19701	5033ED604ROF
A64AIR3110	321-0286-00	B010702		RES, FXD, FILM: 9.31K OHM, 1%, 0.125W, TC=TO	19701	5043ED9K310F
A64AIR3117	315-0302-00	B010100	B010701	RES, FXD, FILM: 3K OHM, 5%, 0.25W	57668	NTR25J-E03K0
A64AIR4016	323-0620-00	B010100	B010701	RES, FXD, FILM: 800K OHM, 1%, 0.5W, TC=TO	91637	MFF1226G80002F
A64AIR4019	321-0378-00	B010100	B010701	RES, FXD, FILM: 84.5K OHM, 1%, 0.125W, TC=TO	07716	CEAD84501F
A64AIR4020	315-0103-00	B010702		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A64AIR4021	315-0302-00	B010100	B010701	RES, FXD, FILM: 3K OHM, 5%, 0.25W	57668	NTR25J-E03K0
A64AIR4033	321-0378-00	B010100	B010701	RES, FXD, FILM: 84.5K OHM, 1%, 0.125W, TC=TO	07716	CEAD84501F
A64AIR4040	315-0221-00	B010702		RES, FXD, FILM: 220 OHM, 5%, 0.25W	57668	NTR25J-E220E
A64AIR4045	315-0560-00	B010702		RES, FXD, FILM: 56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A64AIR4046	321-0286-00	B010702		RES, FXD, FILM: 9.31K OHM, 1%, 0.125W, TC=TO	19701	5043ED9K310F
A64AIR4047	315-0103-00	B010702		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A64AIR4048	315-0242-00	B010100	B010701	RES, FXD, FILM: 2.4K OHM, 5%, 0.25W	57668	NTR25J-E02K4
A64AIR4049	321-0347-00	B010100	B010701	RES, FXD, FILM: 40.2K OHM, 1%, 0.125W, TC=TO	91637	CMF55116G40201F
A64AIR4049	301-0434-00	B010702		RES, FXD, FILM: 430K OHM, 5%, 0.5W	19701	5053CX430K0J
A64AIR4051	321-0286-00			RES, FXD, FILM: 9.31K OHM, 1%, 0.125W, TC=TO	19701	5043ED9K310F
A64AIR4052	321-0318-00			RES, FXD, FILM: 20.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED20K00F
A64AIR4059	321-0379-00			RES, FXD, FILM: 86.6K OHM, 1%, 0.125W, TC=TO	07716	CEAD86601F
A64AIR4061	321-0280-00			RES, FXD, FILM: 8.06K OHM, 1%, 0.125W, TC=TO	19701	5033ED9K060F
A64AIR4062	321-0286-00			RES, FXD, FILM: 9.31K OHM, 1%, 0.125W, TC=TO	19701	5043ED9K310F
A64AIR4064	321-0318-00			RES, FXD, FILM: 20.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED20K00F
A64AIR4065	321-0416-00			RES, FXD, FILM: 210K OHM, 1%, 0.125W, TC=TO	07716	CEAD21002F
A64AIR4067	321-0282-00			RES, FXD, FILM: 8.45K OHM, 1%, 0.125W, TC=TO	07716	CFAD84500F
A64AIR4069	321-0416-00			RES, FXD, FILM: 210K OHM, 1%, 0.125W, TC=TO	07716	CEAD21002F
A64AIR4071	321-0347-00	B010100	B010701	RES, FXD, FILM: 40.2K OHM, 1%, 0.125W, TC=TO	91637	CMF55116G40201F
A64AIR4072	321-0290-00	B010100	B010701	RES, FXD, FILM: 10.2K OHM, 1%, 0.125W, TC=TO	19701	5043ED10K20F
A64AIR4072	315-0153-00	B010702		RES, FXD, FILM: 15K OHM, 5%, 0.25W	19701	5043CX15K00J
A64AIR4074	321-0378-00	B010702		RES, FXD, FILM: 84.5K OHM, 1%, 0.125W, TC=TO	07716	CEAD84501F
A64AIR4076	321-0378-00	B010702		RES, FXD, FILM: 84.5K OHM, 1%, 0.125W, TC=TO	07716	CEAD84501F
A64AIR4078	315-0102-00	B010100	B010701	RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A64AIR4079	321-0347-00	B010702		RES, FXD, FILM: 40.2K OHM, 1%, 0.125W, TC=TO	91637	CMF55116G40201F
A64AIR4088	315-0391-00	B010702		RES, FXD, FILM: 390 OHM, 5%, 0.25W	57668	NTR25J-E390E
A64AIR4089	315-0301-00	B010702		RES, FXD, FILM: 300 OHM, 5%, 0.25W	57668	NTR25J-E300E
A64AIR4091	321-0347-00	B010702		RES, FXD, FILM: 40.2K OHM, 1%, 0.125W, TC=TO	91637	CMF55116G40201F
A64AIR4092	321-0347-00	B010702		RES, FXD, FILM: 40.2K OHM, 1%, 0.125W, TC=TO	91637	CMF55116G40201F
A64AIR4099	315-0391-00	B010702		RES, FXD, FILM: 390 OHM, 5%, 0.25W	57668	NTR25J-E390E
A64AIR4101	321-0229-00	B010100	B010701	RES, FXD, FILM: 2.37K OHM, 1%, 0.125W, TC=TO	19701	5043ED2K37F
A64AIR4103	321-0229-00	B010100	B010701	RES, FXD, FILM: 2.37K OHM, 1%, 0.125W, TC=TO	19701	5043ED2K37F
A64AIR4105	321-0264-00	B010702		RES, FXD, FILM: 5.49K OHM, 1%, 0.125W, TC=TO	07716	CEAD54900C
A64AIR4110	301-0434-00	B010702		RES, FXD, FILM: 430K OHM, 5%, 0.5W	19701	5053CX430K0J
A64AIR5010	315-0560-00	B010702		RES, FXD, FILM: 56 OHM, 5%, 0.25W	57668	NTR25J-E56E0
A64AIR5020	311-1245-00	B010702		RES, VAR, NONWV: TRMR, 10K OHM, 0.5W	32997	3386X-DY6-103
A64AIR5023	315-0102-00	B010100	B010701	RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A64AIR5025	315-0103-00	B010100	B010701	RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A64AIR5025	321-0286-00	B010702		RES, FXD, FILM: 9.31K OHM, 1%, 0.125W, TC=TO	19701	5043ED9K310F
A64AIR5027	315-0203-00	B010100	B010701	RES, FXD, FILM: 20K OHM, 5%, 0.25W	57668	NTR25J-E 20K
A64AIR5029	315-0102-00	B010100	B010701	RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A64AIR5030	311-1245-00	B010702		RES, VAR, NONWV: TRMR, 10K OHM, 0.5W	32997	3386X-DY6-103
A64AIR5032	321-0210-00	B010702		RES, FXD, FILM: 1.50K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K50F
A64AIR5034	315-0221-00	B010702		RES, FXD, FILM: 220 OHM, 5%, 0.25W	57668	NTR25J-E220E
A64AIR5035	315-0101-00	B010100	B010701	RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A64AIR5036	321-0264-00	B010702		RES, FXD, FILM: 5.49K OHM, 1%, 0.125W, TC=TO	07716	CEAD54900C
A64AIR5037	315-0102-00	B010100	B010701	RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A64AIR5038	321-0264-00	B010702		RES, FXD, FILM: 5.49K OHM, 1%, 0.125W, TC=TO	07716	CEAD54900C
A64AIR5039	315-0103-00	B010100	B010701	RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A64A1R5041	315-0203-00	B010100	B010701	RES,FXD,FILM:20K OHM,5%,0.25W	57668	NTR25J-E 20K
A64A1R5042	315-0102-00	B010100	B010701	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R5045	321-0210-00	B010702		RES,FXD,FILM:1.50K OHM,1%,0.125W,TC=TO	19701	5033ED1K50F
A64A1R5049	321-0420-00	B010100	B010701	RES,FXD,FILM:232K OHM,1%,0.125W,TC=TO	07716	CEAD23202F
A64A1R5053	321-0335-00			RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A64A1R5056	321-0424-00	B010702		RES,FXD,FILM:255K OHM,1%,0.125W,TC=TO	07716	CEAD25502F
A64A1R5057	321-0412-00			RES,FXD,FILM:191K OHM,1%,0.125W,TC=TO	07716	CEAD19102F
A64A1R5058	321-0215-00			RES,FXD,FILM:1.69K OHM,1%,0.125W,TC=TO	07716	CEAD16900F
A64A1R5059	321-0412-00			RES,FXD,FILM:191K OHM,1%,0.125W,TC=TO	07716	CEAD19102F
A64A1R5062	321-0379-00			RES,FXD,FILM:86.6K OHM,1%,0.125W,TC=TO	07716	CEAD86601F
A64A1R5070	321-0420-00	B010702		RES,FXD,FILM:232K OHM,1%,0.125W,TC=TO	07716	CEAD23202F
A64A1R5078	315-0470-00	B010702		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A64A1R5081	315-0103-00	B010100	B010701	RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A64A1R5082	315-0103-00	B010100	B010701	RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A64A1R5083	321-0398-00			RES,FXD,FILM:137K OHM,1%,0.125W,TC=TO	07716	CEAD13702F
A64A1R5084	315-0102-00	B010100	B010701	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R5086	315-0101-00	B010100	B010701	RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A64A1R5086	321-0424-00	B010702		RES,FXD,FILM:255K OHM,1%,0.125W,TC=TO	07716	CEAD25502F
A64A1R5087	321-0285-00	B010702		RES,FXD,FILM:9.09K OHM,1%,0.125W,TC=TO	07716	CEAD90900F
A64A1R5090	315-0153-00	B010702		RES,FXD,FILM:15K OHM,5%,0.25W	19701	5043CX15K00J
A64A1R5092	321-0378-00	B010702		RES,FXD,FILM:84.5K OHM,1%,0.125W,TC=TO	07716	CEAD84501F
A64A1R5096	315-0102-00	B010100	B010701	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R5097	315-0103-00	B010100	B010701	RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A64A1R5097	315-0301-00	B010702		RES,FXD,FILM:300 OHM,5%,0.25W	57668	NTR25J-E300E
A64A1R5098	315-0621-00	B010702		RES,FXD,FILM:620 OHM,5%,0.25W	57668	NTR25J-E620E
A64A1R5099	315-0103-00	B010100	B010701	RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A64A1R5102	315-0102-00	B010100	B010701	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R6010	301-0434-00	B010702		RES,FXD,FILM:430K OHM,5%,0.5W	19701	5053CX430K0J
A64A1R6015	315-0104-00	B010702		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A64A1R6017	321-0378-00	B010100	B010701	RES,FXD,FILM:84.5K OHM,1%,0.125W,TC=TO	07716	CEAD84501F
A64A1R6020	321-0439-00	B010702		RES,FXD,FILM:365K OHM,1%,0.125W,TC=TO	07716	CEAD36502F
A64A1R6024	321-0338-00	B010702		RES,FXD,FILM:32.4K OHM,1%,0.125W,TC=TO	19701	5033ED32K40F
A64A1R6032	321-0424-00	B010100	B010701	RES,FXD,FILM:255K OHM,1%,0.125W,TC=TO	07716	CEAD25502F
A64A1R6034	315-0101-00	B010100	B010701	RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A64A1R6065	315-0102-00	B010702		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R6070	321-0335-00	B010702		RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A64A1R6071	321-0335-00			RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A64A1R6072	321-0335-00	B010100	B010701	RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A64A1R6073	321-0335-00	B010100	B010701	RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A64A1R6077	321-0335-00	B010702		RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A64A1R6078	321-0335-00	B010702		RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A64A1R6081	321-0335-00	B010100	B010701	RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A64A1R6082	315-0102-00	B010100	B010701	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R6084	315-0102-00	B010100	B010701	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R6086	321-0424-00	B010100	B010701	RES,FXD,FILM:255K OHM,1%,0.125W,TC=TO	07716	CEAD25502F
A64A1R6095	315-0102-00	B010702		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R6096	315-0102-00	B010702		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R6098	315-0202-00	B010702		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A64A1R6109	321-0378-00	B010100	B010701	RES,FXD,FILM:84.5K OHM,1%,0.125W,TC=TO	07716	CEAD84501F
A64A1R7020	315-0101-00	B010702		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A64A1R7021	315-0512-00	B010100	B010701	RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A64A1R7022	315-0512-00	B010100	B010701	RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A64A1R7023	315-0512-00	B010100	B010701	RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A64A1R7025	315-0101-00	B010702		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A64A1R7031	315-0101-00	B010100	B010701	RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A64A1R7032	321-0439-00	B010100	B010701	RES,FXD,FILM:365K OHM,1%,0.125W,TC=TO	07716	CEAD36502F
A64A1R7034	321-0338-00	B010100	B010701	RES,FXD,FILM:32.4K OHM,1%,0.125W,TC=TO	19701	5033ED32K40F
A64A1R7035	315-0512-00	B010702		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A64A1R7036	315-0512-00	B010702	RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A64A1R7037	315-0512-00	B010702	RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A64A1R7051	321-0335-00	B010100	RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A64A1R7065	321-0335-00	B010702	RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A64A1R7070	321-0335-00	B010702	RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A64A1R7074	315-0102-00	B010702	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R7075	315-0104-00	B010702	RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A64A1R7078	315-0100-00	B010100	RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A64A1R7079	315-0100-00	B010100	RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A64A1R7080	315-0100-00	B010702	RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A64A1R7081	321-0335-00	B010100	RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A64A1R7085	315-0100-00	B010702	RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A64A1R8071	315-0104-00	B010100	RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A64A1U2020	156-0742-02	B010702	MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A64A1U2030	156-0742-02	B010702	MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A64A1U2055	156-0742-02	B010702	MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A64A1U2060	156-0742-02	B010100	MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A64A1U2062	156-0742-02		MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A64A1U4080	156-0742-02	B010702	MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A64A1U5090	156-0742-02	B010702	MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A64A1U6024	156-1226-01		MICROCKT,LINEAR:DUAL COMPARATOR,SCRN	27014	LM319J/A+
A64A1U6055	156-1211-00		MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	27014	LF13333N
A64A1U6065	156-0742-02		MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A64A1U6073	156-0742-02		MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A64A1U7055	156-1211-00		MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	27014	LF13333N
A64A1U7065	156-0742-02		MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A64A1U7073	156-0158-04		MICROCKT,LINEAR:DUAL OPNL AMPL	01295	MC1458JG
A64A1VR1035	152-0279-00	B010100	SEMICON DVC,DI:ZEN,SI,5.1V,5%,0.4W,DO-7	14552	TD3810989
A64A1VR1085	152-0243-00	B010702	SEMICON DVC,DI:ZEN,SI,15V,5%,0.4W,DO-7	14433	Z5412
A64A1VR3035	152-0279-00	B010702	SEMICON DVC,DI:ZEN,SI,5.1V,5%,0.4W,DO-7	14552	TD3810989
A64A1VR3074	152-0279-00	B010100	SEMICON DVC,DI:ZEN,SI,5.1V,5%,0.4W,DO-7	14552	TD3810989
A64A1VR3099	152-0279-00	B010702	SEMICON DVC,DI:ZEN,SI,5.1V,5%,0.4W,DO-7	14552	TD3810989
A64A1VR3100	152-0243-00	B010702	SEMICON DVC,DI:ZEN,SI,15V,5%,0.4W,DO-7	14433	Z5412
A64A1VR4030	152-0243-00	B010702	SEMICON DVC,DI:ZEN,SI,15V,5%,0.4W,DO-7	14433	Z5412
A64A1VR5030	152-0243-00	B010702	SEMICON DVC,DI:ZEN,SI,15V,5%,0.4W,DO-7	14433	Z5412
A66	672-0159-00		CIRCUIT BD ASSY:CRT READOUT	80009	672-0159-00
A66A1	670-7902-00		CIRCUIT BD ASSY:CRT READOUT	80009	670-7902-00
A66A1C1011	283-0047-00		CAP,FXD,CER DI:270PF,5%,500V	59660	0831604Z5F0271J
A66A1C1014	283-0197-00		CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A66A1C1015	283-0197-00		CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A66A1C1018	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C1023	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C1031	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C1043	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C1057	283-0051-00		CAP,FXD,CER DI:0.0033UF,5%,100V	04222	SR301A332JAA
A66A1C1058	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2012	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A66A1C2013	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2015	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2016	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2018	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2020	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2022	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2025	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2031	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2038	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2042	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2056	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A66A1C3025	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C3026	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C3027	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A66A1C3028	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C3049	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C3056	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C3057	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1CR1012	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A66A1CR1013	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A66A1L3055	108-0836-00		COIL,RF:FIXED,14UH	80009	108-0836-00
A66A1L3056	108-0537-00		COIL,RF:FIXED,200UH	80009	108-0537-00
A66A1L3059	108-0537-00		COIL,RF:FIXED,200UH	80009	108-0537-00
A66A1Q2024	151-0190-00		TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A66A1Q3018	151-0190-00		TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A66A1R1014	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A66A1R1015	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A66A1R1016	321-0307-00		RES,FXD,FILM:15.4K OHM,1%,0.125W,TC=TO	19701	5043ED15K40F
A66A1R1017	321-1313-08		RES,FXD,FILM:18K OHM,1%,0.125W,TC=T2	07716	CEAC18001F
A66A1R1026	315-0472-00		RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A66A1R1033	315-0472-00		RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A66A1R1040	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A66A1R1042	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A66A1R1056	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A66A1R1057	321-0366-00		RES,FXD,FILM:63.4K OHM,1%,0.125W,TC=TO	19701	5043ED63K40F
A66A1R1058	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A66A1R2012	321-0277-03		RES,FXD,FILM:7.50K OHM,0.25%,0.125W,TC=T2	01121	ORDER BY DESCR
A66A1R2013	321-0277-03		RES,FXD,FILM:7.50K OHM,0.25%,0.125W,TC=T2	01121	ORDER BY DESCR
A66A1R2016	321-0260-03		RES,FXD,FILM:4.99K OHM,0.25%,0.125W,T=T2	01121	ORDER BY DESCR
A66A1R2017	321-0281-07		RES,FXD,FILM:8.25K OHM,0.1%,0.125W,TC=T9	07716	CEAE82500B
A66A1R2018	321-0328-00		RES,FXD,FILM:25.5K OHM,1%,0.125W,TC=TO	19701	5043ED25K50F
A66A1R2019	315-0472-00		RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A66A1R2021	315-0153-00		RES,FXD,FILM:15K OHM,5%,0.25W	19701	5043CX15K00J
A66A1R2027	321-0242-00		RES,FXD,FILM:3.24K OHM,1%,0.125W,TC=TO	19701	5043ED3K240F
A66A1R2028	321-0296-00		RES,FXD,FILM:11.8K OHM,1%,0.125W,TC=TO	07716	CEAD11801F
A66A1R3014	321-0219-00		RES,FXD,FILM:1.87K OHM,1%,0.125W,TC=TO	07716	CEAD18700F
A66A1R3015	321-0301-00		RES,FXD,FILM:13.3K OHM,1%,0.125W,TC=TO	07716	CEAD13301F
A66A1R3025	321-0307-00		RES,FXD,FILM:15.4K OHM,1%,0.125W,TC=TO	19701	5043ED15K40F
A66A1R3026	321-0603-00		RES,FXD,FILM:15K OHM,0.25%,0.125W,TC=T2	19701	5033RC15K00C
A66A1R3027	321-0303-00		RES,FXD,FILM:14.0K OHM,1%,0.125W,TC=TO	07716	CEAD 14001F
A66A1R3028	321-1723-07		RES,FXD,FILM:3.15K OHM,0.1%,0.125W,TC=T9	19701	5033RE3K150B
A66A1U1016	156-0733-02		MICROCKT,DGTL:DUAL MONOSTABLE MV W/ST INP,S CRN	80009	156-0733-02
A66A1U1020	156-0391-02		MICROCKT,DGTL:HEX LATCH W/CLEAR,SCRN	80009	156-0391-02
A66A1U1025	156-0480-02		MICROCKT,DGTL:QUAD 2-INP & GATE,SCRN,	80009	156-0480-02
A66A1U1028	156-0385-02		MICROCKT,DGTL:HEX INVERTER,SCRN	80009	156-0385-02
A66A1U1033	156-0718-03		MICROCKT,DGTL:TRIPLE 3-INP NOR GATE,SCRN	80009	156-0718-03
A66A1U1037	156-0386-02		MICROCKT,DGTL:TRIPLE 3-INP NAND GATE,SCRN	80009	156-0386-02
A66A1U1041	156-1059-01		MICROCKT,DGTL:DUAL J-K EDGE TRIGGERED FF	80009	156-1059-01
A66A1U1046	156-0530-02		MICROCKT,DGTL:QUAD 2-INP MUX,SCRN	80009	156-0530-02
A66A1U1050	156-0798-02		MICROCKT,DGTL:DUAL 14/1-LINE SEL/MUX SCRN	80009	156-0798-02
A66A1U1055	156-0733-02		MICROCKT,DGTL:DUAL MONOSTABLE MV W/ST INP,S CRN	80009	156-0733-02
A66A1U2014	156-0844-02		MICROCKT,DGTL:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A(NP3)
A66A1U2018	156-0844-02		MICROCKT,DGTL:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A(NP3)
A66A1U2022	156-0844-02		MICROCKT,DGTL:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A(NP3)
A66A1U2026	156-0844-02		MICROCKT,DGTL:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A(NP3)
A66A1U2031	156-0469-02		MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A66A1U2035	156-0385-02		MICROCKT,DGTL:HEX INVERTER,SCRN	80009	156-0385-02

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Dscont			
A66A1U2039	156-0386-02			MICROCKT,DGTL:TRIPLE 3-INP NAND GATE,SCRN	80009	156-0386-02
A66A1U2044	156-0479-02			MICROCKT,DGTL:QUAD 2-INP OR GATE,SCRN	80009	156-0479-02
A66A1U2048	156-1170-00			MICROCKT,DGTL:TTL,ROM,CHAR GEN	27014	DM86S64CAB/N
A66A1U2052	156-1614-00			IC,MEMORY:NMOS,SRAM;1K X 4,150NS;,DIP18.3,C	34649	D2114AL-3
				ERAMIC		
A66A1U2057	156-1614-00			IC,MEMORY:NMOS,SRAM;1K X 4,150NS;,DIP18.3,C	34649	D2114AL-3
				ERAMIC		
A66A1U3015	156-1255-00			MICROCKT,LINEAR:D/A CONVERTER,8 BIT	06665	DAC08-157Q
A66A1U3021	156-1211-00			MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	27014	LF13333N
A66A1U3029	156-1589-00			MICROCKT,LINEAR:D/A CONVERTER,12 BIT,HIGH S	06665	DAC312FR
				PEED,MONOLITHIC		
A66A1U3034	156-0913-02			MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A66A1U3038	156-0982-03			MICROCKT,DGTL:OCTAL-D-EDGE TRIG FF,SCRN	80009	156-0982-03
A66A1U3042	156-0956-02			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT,SCRN	80009	156-0956-02
A66A1U3047	156-0956-02			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT,SCRN	80009	156-0956-02
A66A1U3051	156-0469-02			MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A66A1VR1025	152-0326-00			SEMICON DVC,DI:ZEN,SI,7.5V,5%,0.4W,DO-7	04713	SZ13927
A66A1VR1029	152-0326-00			SEMICON DVC,DI:ZEN,SI,7.5V,5%,0.4W,DO-7	04713	SZ13927
A68	644-0565-00	B010100	B010228	VR MODULE ASSY:	80009	644-0565-00
A68	644-0565-01	B010229	B010336	VR MODULE ASSY:	80009	644-0565-01
A68	644-0565-02	B010337	B010700	VAR RESOLN MDL:	80009	644-0565-02
A68	644-0565-03	B010701		VAR RESOLN MDL:495/P	80009	644-0565-03
A68	644-0634-00	B010100	B010228	VAR RESOLN MDL:	80009	644-0634-00
A68	644-0634-01	B010229	B010336	VAR RESOLN MDL:	80009	644-0634-01
A68	644-0634-02	B010337	B010700	VAR RESOLN MDL:	80009	644-0634-02
A68	644-0634-03	B010701		VAR RESOLN MDL:2755/P	80009	644-0634-03
				(OPTION 07 ONLY)		
A68FL6015	119-1676-00			FILTER,BANDPASS:XTAL,10MHZ CTR FREQ,200HZ B	59492	001-37440
				W,TEMP COMP		
				(MATCHED SET W/FL690 ON CHASSIS)		
A68U3041	156-0277-01			MICROCKT,LINEAR:VOLTAGE RGLTR,POS 5V,SCRN	04713	MC7805CTD
A68W694	175-2417-00			CABLE ASSY,RF:50 OHM COAX,27.0 L	80009	175-2417-00
A68Y2036	119-0968-00			FILTER,BANDPASS:XTAL,6 POLE ML	75378	965-0159
				(MATCHED SET W/A68Y6050 & A68Y3046)		
A68Y2043	119-0969-00			FILTER,BANDPASS:XTAL,4 POLE ML	75378	965-0160
				(MATCHED SET W/A68Y5040)		
A68Y3046	119-0968-00			FILTER,BANDPASS:XTAL,6 POLE ML	75378	965-0159
				(MATCHED SET W/A68Y6050 & A68Y2036)		
A68Y5040	119-0969-00			FILTER,BANDPASS:XTAL,4 POLE ML	75378	965-0160
				(MATCHED SET W/A68Y2043)		
A68Y6050	119-0968-00			FILTER,BANDPASS:XTAL,6 POLE ML	75378	965-0159
				(MATCHED SET W/A68Y2036 & A68Y3046)		
A68A1	670-5528-03			CIRCUIT BD ASSY:#1VR MOTHER	80009	670-5528-03
A68A1C1066	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C1067	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C1068	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C1069	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C1075	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C1082	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C1083	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C1084	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C1085	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C2076	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C2086	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C2088	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C3019	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C3026	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C3028	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C3029	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C3035	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA

Component No.	Tektronix		Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
	Part No.	Effective	Discort				
A68A1C3043	283-0111-00				CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C3048	283-0111-00				CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C3049	283-0111-00				CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C3062	283-0204-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A1C3066	283-0204-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A1C3077	283-0204-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A1L3065	108-0395-00				COIL,RF:FIXED,64UH	80009	108-0395-00
A68A1L3066	108-0395-00				COIL,RF:FIXED,64UH	80009	108-0395-00
A68A1P3072	131-2167-00				CONN,RCPT,ELEC:CKT BD,FEMALE,12/24	00779	85927-5
A68A1R1065	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R1066	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R1067	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R1068	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R1075	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R1082	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R1083	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R1084	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R1085	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R2076	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R2086	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R2088	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R3019	315-0270-00				RES,FXD,FILM:27 OHM,5%,0.25W	19701	5043CX27R00J
A68A1R3026	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R3028	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R3029	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R3035	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R3043	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R3048	307-0106-00				RES,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB 4765
A68A1R3049	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R3081	315-0101-00				RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A68A2	670-5536-04	B010100	B010700		CIRCUIT BD ASSY:#2 V.R. MOTHER	80009	670-5536-04
A68A2	670-5536-05	B010701			CIRCUIT BD ASSY:#2 V.R. MOTHER	80009	670-5536-05
A68A2C2011	283-0111-00				CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A2C2015	283-0111-00				CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A2C2018	283-0111-00				CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A2C2023	283-0204-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A2C2033	283-0204-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A2C3019	283-0111-00				CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A2C3027	283-0111-00				CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A2C3041	290-0340-00				CAP,FXD,ELCTLT:10UF,10%,50V	56289	109D106X9050C2
A68A2C3042	283-0111-00				CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A2C3043	283-0330-00	B010701			CAP,FXD,CER DI:100PF,5%,50V	05397	C320C101J5R5CA
A68A2C4027	283-0111-00				CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A2C4035	283-0204-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A2C4037	283-0204-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A2C4038	283-0204-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A2C4039	283-0111-00				CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A2CR3020	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3021	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3022	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3023	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3024	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3025	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3026	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3027	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3031	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3033	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3034	152-0141-02				SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A68A2CR4029	152-0141-02		SEMICONDC DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2L4025	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A2L4031	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A2Q3035	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A68A2Q3036	151-0136-00		TRANSISTOR:NPN,SI,TO-39	02735	35495
A68A2Q4035	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A68A2Q4037	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A68A2R2014	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A68A2R2026	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A68A2R2031	311-0978-00		RES,VAR,NONNW:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R2033	321-0756-00		RES,FXD,FILM:50K OHM,1%,0.125W,TC=TO	24546	NA55D5002F
A68A2R2035	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A68A2R2038	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A68A2R3014	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A68A2R3015	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A68A2R3019	311-0978-00		RES,VAR,NONNW:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R3020	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=TO	07716	CEAD12401F
A68A2R3021	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=TO	07716	CEAD12401F
A68A2R3022	311-0978-00		RES,VAR,NONNW:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R3023	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=TO	07716	CEAD12401F
A68A2R3024	311-0978-00		RES,VAR,NONNW:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R3025	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=TO	07716	CEAD12401F
A68A2R3026	311-0978-00		RES,VAR,NONNW:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R3027	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=TO	07716	CEAD12401F
A68A2R3028	311-0978-00		RES,VAR,NONNW:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R3029	311-0978-00		RES,VAR,NONNW:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R3030	311-0978-00		RES,VAR,NONNW:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R3031	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=TO	07716	CEAD12401F
A68A2R3032	311-0978-00		RES,VAR,NONNW:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R3033	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=TO	07716	CEAD12401F
A68A2R3034	311-0978-00		RES,VAR,NONNW:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R3035	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A2R3036	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=TO	07716	CEAD12401F
A68A2R3037	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A68A2R3038	321-0239-00		RES,FXD,FILM:3.01K OHM,1%,0.125W,TC=TO	19701	5043ED3K010F
A68A2R3039	321-0260-00		RES,FXD,FILM:4.99K OHM,1%,0.125W,TC=TO	19701	5033ED4K990F
A68A2R3041	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A68A2R3042	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A68A2R3043	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A2R3044	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A2R3045	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A68A2R4026	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=TO	07716	CEAD12401F
A68A2R4029	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A68A2R4031	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A2R4039	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A2U3010	156-0913-02		MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A68A2U3017	156-0913-02		MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A68A2U3023	156-1235-00		MICROCKT,DGTL:LSTTL,BCD TO DEC DECODER/DR	01295	SN74LS145N3
A68A2U3038	156-0158-04		MICROCKT,LINEAR:DUAL OPNL AMPL	01295	MC1458JG
A68A2U4022	156-0469-02		MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A68A3	670-9160-00		CIRCUIT BD ASSY:VR INPUT	80009	670-9160-00
A68A3C1016	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A3C1019	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A3C1022	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A3C1025	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A3C1026	281-0167-00		CAP,VAR,CER DI:9-45PF,200V	33095	53-717-001 D9-45
A68A3C1031	283-0869-00		CAP,FXD,CER DI:68PF,NPO,100V,1%	16299	SR151A680JAA
A68A3C1032	281-0799-00		CAP,FXD,CER DI:62PF,2%,100V	04222	MA101A620GAA



Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A68A3C1033	281-0167-00			CAP, VAR, CER DI:9-45PF, 200V	33095	53-717-001 D9-45
A68A3C1035	281-0577-00			CAP, FXD, CER DI:14PF, 5%, 500V	52763	2RDPLZ007 14PQJC
A68A3C1036	281-0799-00			CAP, FXD, CER DI:62PF, 2%, 100V	04222	MA101A620GAA
A68A3C1037	283-0869-00			CAP, FXD, CER DI:68PF, NPO, 100V, 1%	16299	SR151A680JAA
A68A3L1018	108-0395-00			COIL, RF: FIXED, 64UH	80009	108-0395-00
A68A3L1027	108-0701-00			COIL, RF: FIXED, 1.45UH	80009	108-0701-00
A68A3L1033	108-0701-00			COIL, RF: FIXED, 1.45UH	80009	108-0701-00
A68A3Q1023	151-0650-00			TRANSISTOR: NPN, SI, TO-39	S0545	2SC1252
A68A3R1014	321-0114-00			RES, FXD, FILM: 150 OHM, 1%, 0.125 W, TC=TO	19701	5033ED150ROF
A68A3R1015	321-0114-00			RES, FXD, FILM: 150 OHM, 1%, 0.125 W, TC=TO	19701	5033ED150ROF
A68A3R1016	321-0054-00			RES, FXD, FILM: 35.7 OHM, 0.5%, 0.125W, TC=TO MI	91637	CMF55116G35R70F
A68A3R1022	315-0270-00			RES, FXD, FILM: 27 OHM, 5%, 0.25W	19701	5043CX27R00J
A68A3R1023	307-0113-00			RES, FXD, CMPSN: 5.1 OHM, 5%, 0.25W	01121	CB51G5
A68A3R1024	315-0911-00			RES, FXD, FILM: 910 OHM, 5%, 0.25W	57668	NTR25J-E910E
A68A3R1025	315-0102-00			RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A68A3R1026	315-0511-00			RES, FXD, FILM: 510 OHM, 5%, 0.25W	19701	5043CX510R0J
A68A3T1019	120-0459-00			XFMR, TOROID:	80009	120-0459-00
A68A4	670-8573-00	B010100	B010336	CIRCUIT BD ASSY: 1ST FILTER SELECT	80009	670-8573-00
A68A4	670-8573-01	B010337		CIRCUIT BD ASSY: 1ST FILTER SELECT	80009	670-8573-01
A68A4	670-9597-00	B010100	B010336	CIRCUIT BD ASSY: 1ST FILTER SELECT	80009	670-9597-00
A68A4	670-9597-01	B010337		CIRCUIT BD ASSY: 1ST FILTER SELECT (OPTION 07 ONLY)	80009	670-9597-01
A68A4C1011	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C1014	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C1015	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C1016	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C1017	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C1055	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C1056	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C1060	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C2012	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C2013	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C2015	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C2016	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C2017	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C2019	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C2020	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C2026	283-0359-00			CAP, FXD, CER DI: 1000PF, 10%, 200V	04222	SR212A102KAA
A68A4C2037	281-0221-00			CAP, VAR, CER DI: 2-10PF, 100V	72982	Q513013A 2 0-10
A68A4C2051	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C2054	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C2057	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C2058	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C2060	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C3011	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C3014	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C3016	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C3017	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C3018	283-0204-00			CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C3023	281-0153-00			CAP, VAR, AIR DI: 1.7-10PF, 250V	74970	187-0106-055
A68A4C3026	281-0810-00			CAP, FXD, CER DI: 5.6PF, +/-0.5PF, 100V	04222	MA101A5R6DAA
A68A4C3028	281-0811-00			CAP, FXD, CER DI: 10PF, 10%, 100V	04222	MA101A100KAA
A68A4C3030	283-0838-00			CAP, FXD, CER DI: 18PF, 5%, 50V	80009	283-0838-00
A68A4C3032	281-0810-00			CAP, FXD, CER DI: 5.6PF, +/-0.5PF, 100V	04222	MA101A5R6DAA
A68A4C3032	283-0168-00			CAP, FXD, CER DI: 12PF, 5%, 100V (OPTION 07 ONLY)	04222	SR151A120JAA
A68A4C3034	281-0810-00			CAP, FXD, CER DI: 5.6PF, +/-0.5PF, 100V	04222	MA101A5R6DAA
A68A4C3035	281-0153-00			CAP, VAR, AIR DI: 1.7-10PF, 250V	74970	187-0106-055
A68A4C3036	283-0159-00			CAP, FXD, CER DI: 18PF, 5%, 50V	04222	SR155A180JAA

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix	Serial/Assembly No.		Name & Description	Mfr.	Mfr. Part No.
	Part No.	Effective	Dscont		Code	
A68A4C3039	281-0810-00			CAP, FXD, CER DI:5.6PF, +/-0.5PF, 100V	04222	MA101A5R6DAA
A68A4C3039	283-0168-00			CAP, FXD, CER DI:12PF, 5%, 100V (OPTION 07 ONLY)	04222	SR151A120JAA
A68A4C3040	281-0810-00			CAP, FXD, CER DI:5.6PF, +/-0.5PF, 100V	04222	MA101A5R6DAA
A68A4C3042	283-0159-00			CAP, FXD, CER DI:18PF, 5%, 50V	04222	SR155A180JAA
A68A4C3044	281-0811-00			CAP, FXD, CER DI:10PF, 10%, 100V	04222	MA101A100KAA
A68A4C3050	281-0153-00			CAP, VAR, AIR DI:1.7-10PF, 250V	74970	187-0106-055
A68A4C3051	283-0838-00			CAP, FXD, CER DI:18PF, 5%, 50V	80009	283-0838-00
A68A4C3056	283-0359-00			CAP, FXD, CER DI:1000PF, 10%, 200V	04222	SR212A102KAA
A68A4C3058	283-0204-00			CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C3059	283-0204-00			CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C4015	283-0204-00			CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C4022	283-0204-00			CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C4029	283-0204-00			CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C4031	283-0204-00			CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C4032	283-0204-00			CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C4038	283-0204-00			CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C4039	283-0204-00			CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C4040	283-0111-00			CAP, FXD, CER DI:0.1UF, 20%, 50V	04222	SR305C104MAA
A68A4C4051	283-0204-00			CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C4054	283-0204-00			CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C4056	283-0204-00			CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C4057	283-0204-00			CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C4059	283-0204-00			CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C4060	283-0204-00			CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4C4069	283-0204-00			CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A4CR1010	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4CR1011	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4CR1017	152-0153-00			SEMICON DVC, DI:SW, SI, 10V, 50MA, .DO-7	07263	FD7003
A68A4CR1018	152-0153-00			SEMICON DVC, DI:SW, SI, 10V, 50MA, .DO-7	07263	FD7003
A68A4CR1021	152-0153-00			SEMICON DVC, DI:SW, SI, 10V, 50MA, .DO-7	07263	FD7003
A68A4CR1022	152-0153-00			SEMICON DVC, DI:SW, SI, 10V, 50MA, .DO-7	07263	FD7003
A68A4CR1024	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A68A4CR1025	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A68A4CR1026	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A68A4CR2010	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4CR2011	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4CR2012	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4CR2013	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4CR2052	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A68A4CR2055	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4CR2059	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4CR2062	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4CR2066	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4CR3010	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4CR3011	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4CR3012	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4CR3014	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4CR3060	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4CR3061	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4CR3062	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4CR4026	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A68A4CR4027	152-0141-02			SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A68A4CR4064	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4CR4065	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4CR4068	152-0107-04			SEMICON DVC, DI:RECT, SI, 400V, 400MA	14936	GPD-011
A68A4L1011	108-0395-00			COIL, RF: FIXED, 64UH	80009	108-0395-00
A68A4L1012	108-0395-00			COIL, RF: FIXED, 64UH	80009	108-0395-00

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A68A4L1059	108-0395-00		COIL, RF: FIXED, 64UH	80009	108-0395-00
A68A4L1067	108-0395-00		COIL, RF: FIXED, 64UH	80009	108-0395-00
A68A4L2011	108-0395-00		COIL, RF: FIXED, 64UH	80009	108-0395-00
A68A4L2012	108-0395-00		COIL, RF: FIXED, 64UH	80009	108-0395-00
A68A4L2060	108-0395-00		COIL, RF: FIXED, 64UH	80009	108-0395-00
A68A4L2062	108-0395-00		COIL, RF: FIXED, 64UH	80009	108-0395-00
A68A4L3012	108-0395-00		COIL, RF: FIXED, 64UH	80009	108-0395-00
A68A4L3013	108-0395-00		COIL, RF: FIXED, 64UH	80009	108-0395-00
A68A4L3014	108-0395-00		COIL, RF: FIXED, 64UH	80009	108-0395-00
A68A4L3029	108-0964-00		COIL, RF: FIXED, 1.2 UH	80009	108-0964-00
A68A4L3040	108-0964-00		COIL, RF: FIXED, 1.2 UH	80009	108-0964-00
A68A4L3059	108-0395-00		COIL, RF: FIXED, 64UH	80009	108-0395-00
A68A4L4018	108-0395-00		COIL, RF: FIXED, 64UH	80009	108-0395-00
A68A4L4043	108-0395-00		COIL, RF: FIXED, 64UH	80009	108-0395-00
A68A4L4049	108-0395-00		COIL, RF: FIXED, 64UH	80009	108-0395-00
A68A4L4058	108-0395-00		COIL, RF: FIXED, 64UH	80009	108-0395-00
A68A4L4065	108-0395-00		COIL, RF: FIXED, 64UH	80009	108-0395-00
A68A4L4069	108-0395-00		COIL, RF: FIXED, 64UH	80009	108-0395-00
A68A4Q1019	151-0301-00		TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A68A4Q1020	151-0301-00		TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A68A4Q1055	151-0301-00		TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A68A4Q2019	151-0301-00		TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A68A4Q2020	151-0301-00		TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A68A4Q2050	151-0301-00		TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A68A4Q3019	151-0301-00		TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A68A4Q3055	151-0301-00		TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A68A4Q3060	151-0301-00		TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A68A4Q4019	151-0301-00		TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A68A4Q4050	151-0301-00		TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A68A4Q4055	151-0301-00		TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A68A4R700	315-0822-00		RES, FXD, FILM: 8.2K OHM, 5%, 0.25W (OPTION 07 ONLY)	19701	5043CX8K200J
A68A4R701	315-0822-00		RES, FXD, FILM: 8.2K OHM, 5%, 0.25W (OPTION 07 ONLY)	19701	5043CX8K200J
A68A4R1015	315-0332-00		RES, FXD, FILM: 3.3K OHM, 5%, 0.25W	57668	NTR25J-E03K3
A68A4R1016	315-0121-00		RES, FXD, FILM: 120 OHM, 5%, 0.25W	19701	5043CX120R0J
A68A4R1017	315-0332-00		RES, FXD, FILM: 3.3K OHM, 5%, 0.25W	57668	NTR25J-E03K3
A68A4R1018	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A68A4R1019	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A68A4R1020	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A68A4R1022	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A68A4R1055	315-0121-00		RES, FXD, FILM: 120 OHM, 5%, 0.25W	19701	5043CX120R0J
A68A4R1057	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A68A4R1058	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A68A4R1067	304-0681-00		RES, FXD, CMPSN: 680 OHM, 10%, 1W	01121	GB6811
A68A4R2013	315-0332-00		RES, FXD, FILM: 3.3K OHM, 5%, 0.25W	57668	NTR25J-E03K3
A68A4R2014	315-0121-00		RES, FXD, FILM: 120 OHM, 5%, 0.25W	19701	5043CX120R0J
A68A4R2015	315-0121-00		RES, FXD, FILM: 120 OHM, 5%, 0.25W	19701	5043CX120R0J
A68A4R2016	315-0332-00		RES, FXD, FILM: 3.3K OHM, 5%, 0.25W	57668	NTR25J-E03K3
A68A4R2017	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A68A4R2018	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A68A4R2019	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A68A4R2020	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A68A4R2023	321-0026-00		RES, FXD, FILM: 18.2 OHM, 1%, 0.125W, TC=TO	57668	RB14FXE 18E2
A68A4R2024	321-0143-00		RES, FXD, FILM: 301 OHM, 1%, 0.125W, TC=TO	07716	CEAD301R0F
A68A4R2025	321-0143-00		RES, FXD, FILM: 301 OHM, 1%, 0.125W, TC=TO	07716	CEAD301R0F
A68A4R2026	321-0054-00		RES, FXD, FILM: 35.7 OHM, 0.5%, 0.125W, TC=TO MI	91637	CMF55116G35R70F
A68A4R2027	321-0114-00		RES, FXD, FILM: 150 OHM, 1%, 0.125 W, TC=TO	19701	5033ED150R0F

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A68A4R2028	321-0114-00			RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150ROF
A68A4R2049	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A4R2050	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A4R2055	315-0332-00			RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A4R2056	315-0121-00			RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A4R3014	315-0121-00			RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A4R3015	315-0121-00			RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A4R3016	315-0332-00			RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A4R3017	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A4R3018	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A4R3019	315-0121-00			RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A4R3020	315-0332-00			RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A4R3050	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A4R3053	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A4R3056	315-0332-00			RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A4R3057	315-0121-00			RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A4R3059	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A4R3060	315-0121-00			RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A4R3061	315-0332-00			RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A4R3063	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A4R4012	304-0681-00			RES,FXD,CMPSN:680 OHM,10%,1W	01121	6B6811
A68A4R4015	321-0099-00			RES,FXD,FILM:105 OHM,1%,0.125W,TC=TO	07716	CEAD105ROF
A68A4R4016	321-0099-00			RES,FXD,FILM:105 OHM,1%,0.125W,TC=TO	07716	CEAD105ROF
A68A4R4017	321-0077-00			RES,FXD,FILM:61.9 OHM,1%,0.125W,TC=TO	91637	CMF55116G61R90F
A68A4R4019	315-0332-00			RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A4R4020	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A4R4021	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A4R4048	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A4R4049	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A4R4050	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A4R4053	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A4R4054	315-0332-00			RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A4R4055	315-0121-00			RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A4R4056	315-0121-00			RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A4R4057	315-0332-00			RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A4S3026	260-2031-00			SWITCH,ROCKER:(7)SPST,30VDC,125MA	81073	765B075
A68A4T2035	120-1237-00			TRANSFORMER,RF:TOROID	80009	120-1237-00
A68A4T2055	120-1237-00			TRANSFORMER,RF:TOROID	80009	120-1237-00
A68A4T3026	120-1339-00	B010100	B010336	TRANSFORMER,RF:TOROID	80009	120-1339-00
A68A4T3026	120-1637-00	B010337		TRANSFORMER,RF:TOROID	TK1345	120-1637-00
A68A4T3055	120-1339-00	B010100	B010336	TRANSFORMER,RF:TOROID	80009	120-1339-00
A68A4T3055	120-1637-00	B010337		TRANSFORMER,RF:TOROID	TK1345	120-1637-00
A68A4U4035	156-1235-00			MICROCKT,DGTL:LSTTL,BCD TO DEC DECODER/DR	01295	SN74LS145N3
A68A5	670-8321-00			CIRCUIT BD ASSY:10DB GAIN STEPS	80009	670-8321-00
A68A5C1017	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C1024	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C1028	283-0107-00			CAP,FXD,CER DI:51PF,5%,200V	04222	SR206A510JAA
A68A5C1039	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C1047	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C1057	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A5C1066	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C2013	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C2018	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C2020	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A5C2032	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A5C2046	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A5C2052	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A5C2055	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A68A5C2059	283-0107-00		CAP, FXD, CER DI: 51PF, 5%, 200V	04222	SR206A510JAA
A68A5C3042	283-0111-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	SR305C104MAA
A68A5C3045	283-0204-00		CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A68A5C3046	283-0111-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	SR305C104MAA
A68A5C4024	283-0111-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	SR305C104MAA
A68A5C4028	283-0111-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	SR305C104MAA
A68A5C4046	283-0111-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	SR305C104MAA
A68A5C4054	283-0111-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	SR305C104MAA
A68A5C4059	283-0111-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	SR305C104MAA
A68A5C4064	283-0111-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	SR305C104MAA
A68A5CR1053	152-0524-00		SEMICONDCV, DI: SW, SI, 100V, 0.1A, DO-35	28480	5082-1779
A68A5Q1036	151-0282-00		TRANSISTOR: NPN, SI, TO-72	04713	SRF2625
A68A5Q2015	151-0301-00		TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A68A5Q2027	151-0282-00		TRANSISTOR: NPN, SI, TO-72	04713	SRF2625
A68A5Q2043	151-0282-00		TRANSISTOR: NPN, SI, TO-72	04713	SRF2625
A68A5Q2056	151-0282-00		TRANSISTOR: NPN, SI, TO-72	04713	SRF2625
A68A5Q3016	151-0282-00		TRANSISTOR: NPN, SI, TO-72	04713	SRF2625
A68A5Q3055	151-0282-00		TRANSISTOR: NPN, SI, TO-72	04713	SRF2625
A68A5Q3064	151-0650-00		TRANSISTOR: NPN, SI, TO-39	50545	2SC1252
A68A5Q4039	151-0301-00		TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A68A5R1016	315-0221-00		RES, FXD, FILM: 220 OHM, 5%, 0.25W	57668	NTR25J-E220E
A68A5R1022	315-0151-00		RES, FXD, FILM: 150 OHM, 5%, 0.25W	57668	NTR25J-E150E
A68A5R1026	315-0681-00		RES, FXD, FILM: 680 OHM, 5%, 0.25W	57668	NTR25J-E680E
A68A5R1031	315-0101-00		RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A68A5R1032	315-0390-00		RES, FXD, FILM: 39 OHM, 5%, 0.25W	57668	NTR25J-E39E0
A68A5R1041	315-0681-00		RES, FXD, FILM: 680 OHM, 5%, 0.25W	57668	NTR25J-E680E
A68A5R1046	315-0470-00		RES, FXD, FILM: 47 OHM, 5%, 0.25W	57668	NTR25J-E47E0
A68A5R1050	315-0470-00		RES, FXD, FILM: 47 OHM, 5%, 0.25W	57668	NTR25J-E47E0
A68A5R1052	321-0239-00		RES, FXD, FILM: 3.01K OHM, 1%, 0.125W, TC=TO	19701	5043ED3K010F
A68A5R1056	321-0058-00		RES, FXD, FILM: 39.2 OHM, 0.5%, 0.125W, TC=TO	91637	CMF55116639R20F
A68A5R1060	321-0194-00		RES, FXD, FILM: 1.02K OHM, 1%, 0.125W, TC=TO	07716	CEAD10200F
A68A5R1062	321-0164-00		RES, FXD, FILM: 499 OHM, 1%, 0.125W, TC=TO	19701	5033ED499ROF
A68A5R1064	321-0065-00		RES, FXD, FILM: 46.4 OHM, 1%, 0.125W, TC=TO	57668	RB14FXE 46E4
A68A5R2011	315-0472-00		RES, FXD, FILM: 4.7K OHM, 5%, 0.25W	57668	NTR25J-E04K7
A68A5R2012	315-0472-00		RES, FXD, FILM: 4.7K OHM, 5%, 0.25W	57668	NTR25J-E04K7
A68A5R2018	315-0104-00		RES, FXD, FILM: 100K OHM, 5%, 0.25W	57668	NTR25J-E100K
A68A5R2023	315-0681-00		RES, FXD, FILM: 680 OHM, 5%, 0.25W	57668	NTR25J-E680E
A68A5R2025	311-0635-00		RES, VAR, NONWV: TRMR, 1K OHM, 0.5W	32997	3329H-L58-102
A68A5R2031	321-0194-00		RES, FXD, FILM: 1.02K OHM, 1%, 0.125W, TC=TO	07716	CEAD10200F
A68A5R2034	321-0164-00		RES, FXD, FILM: 499 OHM, 1%, 0.125W, TC=TO	19701	5033ED499ROF
A68A5R2035	321-0065-00		RES, FXD, FILM: 46.4 OHM, 1%, 0.125W, TC=TO	57668	RB14FXE 46E4
A68A5R2039	321-0130-00		RES, FXD, FILM: 221 OHM, 1%, 0.125W, TC=TO	19701	5043ED221ROF
A68A5R2042	315-0390-00		RES, FXD, FILM: 39 OHM, 5%, 0.25W	57668	NTR25J-E39E0
A68A5R2048	321-0097-00		RES, FXD, FILM: 100 OHM, 1%, 0.125W, TC=TO	91637	CMF551166100ROF
A68A5R2051	315-0152-00		RES, FXD, FILM: 1.5K OHM, 5%, 0.25W	57668	NTR25J-E01K5
A68A5R2053	315-0152-00		RES, FXD, FILM: 1.5K OHM, 5%, 0.25W	57668	NTR25J-E01K5
A68A5R2057	315-0681-00		RES, FXD, FILM: 680 OHM, 5%, 0.25W	57668	NTR25J-E680E
A68A5R2063	315-0101-00		RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A68A5R2069	301-0201-00		RES, FXD, FILM: 200 OHM, 5%, 0.5W	19701	5053CX200R0J
A68A5R3014	315-0472-00		RES, FXD, FILM: 4.7K OHM, 5%, 0.25W	57668	NTR25J-E04K7
A68A5R3015	315-0390-00		RES, FXD, FILM: 39 OHM, 5%, 0.25W	57668	NTR25J-E39E0
A68A5R3022	315-0222-00		RES, FXD, FILM: 2.2K OHM, 5%, 0.25W	57668	NTR25J-E02K2
A68A5R3026	315-0222-00		RES, FXD, FILM: 2.2K OHM, 5%, 0.25W	57668	NTR25J-E02K2
A68A5R3029	321-0032-00		RES, FXD, FILM: 21.0 OHM, 1%, 0.125W, TC=TO	57668	RB14FXE 21E0
A68A5R3035	311-0622-00		RES, VAR, NONWV: TRMR, 100 OHM, 0.5W	32997	3329H-L58-101
A68A5R3038	321-0026-00		RES, FXD, FILM: 18.2 OHM, 1%, 0.125W, TC=TO	57668	RB14FXE 18E2
A68A5R3039	315-0104-00		RES, FXD, FILM: 100K OHM, 5%, 0.25W	57668	NTR25J-E100K
A68A5R3044	315-0101-00		RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A68A5R3048	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A68A5R3050	321-0143-00		RES,FXD,FILM:301 OHM,1%,0.125W,TC=TO	07716	CEAD301ROF
A68A5R3052	315-0390-00		RES,FXD,FILM:39 OHM,5%,0.25W	57668	NTR25J-E39E0
A68A5R3059	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A68A5R4013	321-0160-00		RES,FXD,FILM:453 OHM,1%,0.125W,MI	19701	5033ED453ROF
A68A5R4026	315-0151-00		RES,FXD,FILM:150 OHM,5%,0.25W	57668	NTR25J-E150E
A68A5R4030	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A68A5R4033	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A68A5R4035	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A68A5R4045	321-0111-00		RES,FXD,FILM:140 OHM,1%,0.125W,TC=TO	07716	CEAD140ROF
A68A5R4049	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A68A5R4052	315-0181-00		RES,FXD,FILM:180 OHM,5%,0.25W	57668	NTR25J-E180E
A68A5R4061	315-0220-00		RES,FXD,FILM:22 OHM,5%,0.25W	19701	5043CX22R00J
A68A5R4066	315-0220-00		RES,FXD,FILM:22 OHM,5%,0.25W	19701	5043CX22R00J
A68A5T4019	120-1431-00		TRANSFORMER,RF:TOROID 2 WINDING ON FORM	80009	120-1431-00
A68A6	670-5532-03		CIRCUIT BD ASSY:20DB GAIN STEPS	80009	670-5532-03
A68A6C1018	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C1019	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C1022	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C1026	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C1031	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C1041	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A6C1042	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C1045	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A6C2023	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C2032	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C2042	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C2051	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C2053	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C2059	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C2061	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C2069	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6Q1025	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A68A6Q1035	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A68A6Q1043	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A68A6Q1062	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A68A6Q2018	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A68A6Q2042	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A68A6R1015	321-0175-00		RES,FXD,FILM:649 OHM,1%,0.125W,TC=TO	19701	5043ED649ROF
A68A6R1019	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A68A6R1024	321-0130-00		RES,FXD,FILM:221 OHM,1%,0.125W,TC=TO	19701	5043ED221ROF
A68A6R1025	317-0331-00		RES,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A68A6R1026	321-0114-00		RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150ROF
A68A6R1032	321-0026-00		RES,FXD,FILM:18.2 OHM,1%,0.125W,TC=TO	57668	RB14FXE 18E2
A68A6R1037	321-0143-00		RES,FXD,FILM:301 OHM,1%,0.125W,TC=TO	07716	CEAD301ROF
A68A6R1038	317-0222-00		RES,FXD,CMPSN:2.2K OHM,5%,0.125W	01121	BB2225
A68A6R1041	317-0331-00		RES,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A68A6R1042	321-0130-00		RES,FXD,FILM:221 OHM,1%,0.125W,TC=TO	19701	5043ED221ROF
A68A6R1045	317-0331-00		RES,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A68A6R1049	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A68A6R1056	317-0104-00		RES,FXD,CMPSN:100K OHM,5%,0.125W	01121	BB1045
A68A6R1064	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A68A6R1065	317-0222-00		RES,FXD,CMPSN:2.2K OHM,5%,0.125W	01121	BB2225
A68A6R2014	315-0122-00		RES,FXD,FILM:1.2K OHM,5%,0.25W	57668	NTR25J-E01K2
A68A6R2019	317-0222-00		RES,FXD,CMPSN:2.2K OHM,5%,0.125W	01121	BB2225
A68A6R2021	317-0104-00		RES,FXD,CMPSN:100K OHM,5%,0.125W	01121	BB1045
A68A6R2022	317-0222-00		RES,FXD,CMPSN:2.2K OHM,5%,0.125W	01121	BB2225
A68A6R2023	311-0622-00		RES,VAR,NONNW:TRMR,100 OHM,0.5W	32997	3329H-L58-101

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A68A6R2026	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A68A6R2031	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A68A6R2039	317-0222-00		RES,FXD,CMPSN:2.2K OHM,5%,0.125W	01121	BB2225
A68A6R2044	321-0114-00		RES,FXD,FILM:150 OHM,1%,0.125 W,TC=T0	19701	5033ED150ROF
A68A6R2045	321-0085-00		RES,FXD,FILM:75 OHM,1%,0.125W,TC=T0	57668	CRB14FXE 75 OHM
A68A6R2046	317-0104-00		RES,FXD,CMPSN:100K OHM,5%,0.125W	01121	BB1045
A68A6R2051	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A68A6R2052	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A68A6R2060	311-0622-00		RES,VAR,NONW:TRMR,100 OHM,0.5W	32997	3329H-L58-101
A68A6R2061	321-0097-00		RES,FXD,FILM:100 OHM,1%,0.125W,TC=T0	91637	CMF55116G100ROF
A68A6R2062	321-0026-00		RES,FXD,FILM:18.2 OHM,1%,0.125W,TC=T0	57668	RB14FXE 18E2
A68A6R2063	317-0222-00		RES,FXD,CMPSN:2.2K OHM,5%,0.125W	01121	BB2225
A68A7	670-5533-03		CIRCUIT BD ASSY:BAND LEVELING	80009	670-5533-03
A68A7C1017	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C1021	283-0107-00		CAP,FXD,CER DI:51PF,5%,200V	04222	SR206A510JAA
A68A7C1025	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C1032	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C1035	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C1039	283-0107-00		CAP,FXD,CER DI:51PF,5%,200V	04222	SR206A510JAA
A68A7C1044	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C2015	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C2018	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C2023	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C2028	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SRI55E103MAA
A68A7C2029	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C2033	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C2034	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C2042	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C2043	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SRI55E103MAA
A68A7C2046	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7CR2021	152-0524-00		SEMICONV DVC,DI:SW,SI,100V,0.1A,DO-35	28480	5082-1779
A68A7Q1025	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A68A7Q1031	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A68A7Q1033	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A68A7Q1041	151-0650-00		TRANSISTOR:NPN,SI,TO-39	S0545	2SC1252
A68A7Q2015	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A68A7Q2019	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A68A7Q2046	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A68A7R1013	321-0130-00		RES,FXD,FILM:221 OHM,1%,0.125W,TC=T0	19701	5043ED221ROF
A68A7R1014	317-0390-00		RES,FXD,CMPSN:39 OHM,5%,0.125W	01121	BB3905
A68A7R1015	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A68A7R1016	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A68A7R1017	315-0390-00		RES,FXD,FILM:39 OHM,5%,0.25W	57668	NTR25J-E39E0
A68A7R1019	315-0390-00		RES,FXD,FILM:39 OHM,5%,0.25W	57668	NTR25J-E39E0
A68A7R1024	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A68A7R1025	321-0164-00		RES,FXD,FILM:499 OHM,1%,0.125W,TC=T0	19701	5033ED499ROF
A68A7R1026	321-0194-00		RES,FXD,FILM:1.02K OHM,1%,0.125W,TC=T0	07716	CEAD10200F
A68A7R1027	321-0065-00		RES,FXD,FILM:46.4 OHM,1%,0.125W,TC=T0	57668	RB14FXE 46E4
A68A7R1028	315-0471-00		RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A68A7R1029	317-0390-00		RES,FXD,CMPSN:39 OHM,5%,0.125W	01121	BB3905
A68A7R1031	321-0130-00		RES,FXD,FILM:221 OHM,1%,0.125W,TC=T0	19701	5043ED221ROF
A68A7R1033	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A68A7R1035	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A68A7R1036	315-0220-00		RES,FXD,FILM:22 OHM,5%,0.25W	19701	5043CX22R00J
A68A7R1037	315-0220-00		RES,FXD,FILM:22 OHM,5%,0.25W	19701	5043CX22R00J
A68A7R1038	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A68A7R1044	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A68A7R1046	321-0065-00		RES,FXD,FILM:46.4 OHM,1%,0.125W,TC=T0	57668	RB14FXE 46E4

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Dscont			
A68A7R1047	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A68A7R1048	321-0164-00			RES,FXD,FILM:499 OHM,1%,0.125W,TC=TO	19701	5033ED499ROF
A68A7R2017	315-0152-00			RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A68A7R2018	315-0152-00			RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A68A7R2021	315-0470-00			RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A68A7R2024	321-0041-00			RES,FXD,FILM:26.1 OHM,1%,0.125W,TC=TO	91637	CMF55116G26R10F
A68A7R2025	321-0234-00			RES,FXD,FILM:2.67K OHM,1%,0.125W,TC=TO	19701	5033ED2K67F
A68A7R2026	317-0470-00			RES,FXD,CMPSN:47 OHM,5%,0.125W	01121	BB4705
A68A7R2028	317-0470-00			RES,FXD,CMPSN:47 OHM,5%,0.125W	01121	BB4705
A68A7R2031	315-0470-00			RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A68A7R2033	315-0152-00			RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A68A7R2034	315-0152-00			RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A68A7R2036	321-0151-00			RES,FXD,FILM:365 OHM,1%,0.125W,TC=TO	07716	CEAD365R0F
A68A7R2037	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A68A7R2038	315-0821-00			RES,FXD,FILM:820 OHM,5%,0.25W	19701	5043CX820R0J
A68A7R2041	315-0104-00			RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A68A7R2042	321-0051-00			RES,FXD,FILM:33.2 OHM,1%,0.125W,TC=TO	91637	CMF55116G33R20F
A68A7R2043	315-0471-00			RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A68A7R2045	315-0471-00			RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A68A7R2046	317-0103-00			RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A68A7T2013	120-0902-00			XFMR, TOROID:	80009	120-0902-00
A68A8	670-8574-00	B010100	B010228	CIRCUIT BD ASSY:2ND FILTER SELECT	80009	670-8574-00
A68A8	670-8574-01	B010229		CIRCUIT BD ASSY:2ND FILTER SELECT	80009	670-8574-01
A68A8	670-9598-00	B010100	B010228	CIRCUIT BD ASSY:2 ND FILTER SELECT	80009	670-9598-00
A68A8	670-9598-01	B010229		(OPTION 07 ONLY)	80009	670-9598-01
A68A8	670-9598-01	B010229		CIRCUIT BD ASSY:2ND FILTER SELECT	80009	670-9598-01
A68A8	670-9598-01	B010229		(OPTION 07 ONLY)	80009	670-9598-01
A68A8C1015	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C1027	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C1035	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C1041	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C1047	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C1060	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C1061	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C2016	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C2018	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C2019	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C2028	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C2030	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C2033	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C2041	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C2049	283-0359-00			CAP,FXD,CER DI:1000PF,10%,200V	04222	SR212A102KAA
A68A8C2054	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C2058	281-0816-00			CAP,FXD,CER DI:82 PF,5%,100V	04222	MA106A820JAA
A68A8C2065	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C2066	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C2070	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A8C3013	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A8C3026	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C3041	281-0153-00			CAP,VAR,AIR DI:1.7-10PF,250V	74970	187-0106-055
A68A8C3046	281-0811-00			CAP,FXD,CER DI:10PF,10%,100V	04222	MA101A100KAA
A68A8C3047	283-0838-00			CAP,FXD,CER DI:18PF,5%,50V	80009	283-0838-00
A68A8C3049	281-0816-00			CAP,FXD,CER DI:82 PF,5%,100V	04222	MA106A820JAA
A68A8C3066	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C3067	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C3068	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A8C4014	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A8C4015	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA



Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A68A8C4046	283-0159-00		CAP, FXD, CER DI:18PF, 5%, 50V	04222	SR155A180JAA
A68A8C4048	281-0810-00		CAP, FXD, CER DI:5.6PF, +/-0.5PF, 100V	04222	MA101A5R6DAA
A68A8C4048	283-0168-00		CAP, FXD, CER DI:12PF, 5%, 100V (OPTION 07 ONLY)	04222	SR151A120JAA
A68A8C4053	281-0810-00		CAP, FXD, CER DI:5.6PF, +/-0.5PF, 100V	04222	MA101A5R6DAA
A68A8C4054	281-0810-00		CAP, FXD, CER DI:5.6PF, +/-0.5PF, 100V	04222	MA101A5R6DAA
A68A8C4056	281-0810-00		CAP, FXD, CER DI:5.6PF, +/-0.5PF, 100V	04222	MA101A5R6DAA
A68A8C4065	281-0811-00		CAP, FXD, CER DI:10PF, 10%, 100V	04222	MA101A100KAA
A68A8C4066	283-0159-00		CAP, FXD, CER DI:18PF, 5%, 50V	04222	SR155A180JAA
A68A8C4068	283-0111-00		CAP, FXD, CER DI:0.1UF, 20%, 50V	04222	SR305C104MAA
A68A8C4069	283-0838-00		CAP, FXD, CER DI:18PF, 5%, 50V	80009	283-0838-00
A68A8C5048	281-0153-00		CAP, VAR, AIR DI:1.7-10PF, 250V	74970	187-0106-055
A68A8C5051	281-0810-00		CAP, FXD, CER DI:5.6PF, +/-0.5PF, 100V	04222	MA101A5R6DAA
A68A8C5051	283-0168-00		CAP, FXD, CER DI:12PF, 5%, 100V (OPTION 07 ONLY)	04222	SR151A120JAA
A68A8C5055	281-0153-00		CAP, VAR, AIR DI:1.7-10PF, 250V	74970	187-0106-055
A68A8C5057	281-0816-00		CAP, FXD, CER DI:82 PF, 5%, 100V	04222	MA106A820JAA
A68A8C5064	283-0204-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A8C5065	283-0204-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A8C5073	281-0816-00		CAP, FXD, CER DI:82 PF, 5%, 100V	04222	MA106A820JAA
A68A8C6041	283-0111-00		CAP, FXD, CER DI:0.1UF, 20%, 50V	04222	SR305C104MAA
A68A8C6056	283-0359-00		CAP, FXD, CER DI:1000PF, 10%, 200V	04222	SR212A102KAA
A68A8C6072	283-0204-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A8C6073	283-0204-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A8C7059	283-0204-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A8C7061	283-0204-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A8C8013	283-0111-00		CAP, FXD, CER DI:0.1UF, 20%, 50V	04222	SR305C104MAA
A68A8C8024	283-0204-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A8C8025	283-0204-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A8C8029	283-0204-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A8C8040	283-0204-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A8C8045	283-0204-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A8C8046	283-0204-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A8C8057	283-0204-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A8C8061	283-0204-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A8C8075	283-0204-00		CAP, FXD, CER DI:0.01UF, 20%, 50V	04222	SR155E103MAA
A68A8CR1017	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8CR1019	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8CR1020	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8CR1022	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8CR1025	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8CR1029	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8CR1038	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8CR1040	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8CR1050	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8CR1052	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8CR3068	152-0141-02		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A68A8CR7065	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8CR7070	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8CR7071	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8CR7076	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8CR8015	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8CR8016	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8CR8035	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8CR8036	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8CR8059	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8CR8060	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A68A8L1019	108-0395-00		COIL, RF:FIXED, 64UH	80009	108-0395-00

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A68A8L1025	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L1032	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L1045	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L1055	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L2013	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L2059	108-0964-00		COIL,RF:FIXED,1.2 UH	80009	108-0964-00
A68A8L2075	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L5065	108-0964-00		COIL,RF:FIXED,1.2 UH	80009	108-0964-00
A68A8L6056	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L7075	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L8020	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L8040	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L8061	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L8070	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8Q2020	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A68A8Q2028	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A68A8Q2035	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A68A8Q2040	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A68A8Q2055	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A68A8Q3013	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A68A8Q6065	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A68A8Q6075	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A68A8Q7060	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A68A8Q8035	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A68A8Q8050	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A68A8R700	315-0822-00		RES,FXD,FILM:8.2K OHM,5%,0.25W (OPTION 07 ONLY)	19701	5043CX8K200J
A68A8R701	315-0822-00		RES,FXD,FILM:8.2K OHM,5%,0.25W (OPTION 07 ONLY)	19701	5043CX8K200J
A68A8R1033	315-0121-00		RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R1035	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A8R1050	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A8R1055	315-0121-00		RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R1062	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R1064	321-0713-00		RES,FXD,FILM:30 OHM,1%,0.125W,TC=TO	57668	CRB14 FXE 30 OHM
A68A8R1065	311-0622-00		RES,VAR,NONW:TRMR,100 OHM,0.5W	32997	3329H-L58-101
A68A8R1066	321-0032-00		RES,FXD,FILM:21.0 OHM,1%,0.125W,TC=TO	57668	RB14FXE 21E0
A68A8R2014	315-0331-00		RES,FXD,FILM:330 OHM,5%,0.25W	57668	NTR25J-E330E
A68A8R2015	315-0331-00		RES,FXD,FILM:330 OHM,5%,0.25W	57668	NTR25J-E330E
A68A8R2016	315-0121-00		RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R2020	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A8R2025	315-0121-00		RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R2026	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A8R2030	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R2034	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R2037	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R2040	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A8R2043	315-0121-00		RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R2044	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R2045	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R2047	321-0054-00		RES,FXD,FILM:35.7 OHM,0.5%,0.125W,TC=TO MI	91637	CMF55116G35R70F
A68A8R2048	321-0114-00		RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150R0F
A68A8R2049	321-0114-00		RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150R0F
A68A8R2059	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R2067	321-0114-00		RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150R0F
A68A8R3013	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A68A8R3014	321-0054-00		RES,FXD,FILM:35.7 OHM,0.5%,0.125W,TC=TO MI	91637	CMF55116G35R70F
A68A8R3015	311-0622-00		RES,VAR,NONW:TRMR,100 OHM,0.5W	32997	3329H-L58-101

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A68A8R3016	315-0222-00			RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A68A8R3019	321-0032-00			RES,FXD,FILM:21.0 OHM,1%,0.125W,TC=TO	57668	RB14FXE 21E0
A68A8R3022	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R3024	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R3028	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R3029	311-0622-00			RES,VAR,NONWV:TRMR,100 OHM,0.5W	32997	3329H-L58-101
A68A8R3033	311-0622-00			RES,VAR,NONWV:TRMR,100 OHM,0.5W	32997	3329H-L58-101
A68A8R3035	321-0713-00			RES,FXD,FILM:30 OHM,1%,0.125W,TC=TO	57668	CRB14 FXE 30 OHM
A68A8R3036	321-0114-00			RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150ROF
A68A8R3037	321-0032-00			RES,FXD,FILM:21.0 OHM,1%,0.125W,TC=TO	57668	RB14FXE 21E0
A68A8R4013	315-0472-00			RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A68A8R4014	315-0471-00			RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A68A8R4015	315-0222-00			RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A68A8R4019	321-0114-00			RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150ROF
A68A8R4025	311-0633-00			RES,VAR,NONWV:TRMR,5K OHM,0.5W	32997	3329H-L58-502
A68A8R4026	321-0001-00			RES,FXD,FILM:10 OHM,1%,0.125W,TC=TO	19701	5033RD10R00FMS
A68A8R4029	321-0178-00			RES,FXD,FILM:698 OHM,1%,0.125W,TC=TO	07716	CEAD698ROF
A68A8R4030	321-0713-00			RES,FXD,FILM:30 OHM,1%,0.125W,TC=TO	57668	CRB14 FXE 30 OHM
A68A8R4033	321-0032-00			RES,FXD,FILM:21.0 OHM,1%,0.125W,TC=TO	57668	RB14FXE 21E0
A68A8R4034	321-0114-00			RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150ROF
A68A8R5074	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R5075	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R6040	321-0289-00	B010100	B010228	RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A68A8R6040	321-0097-00	B010229		RES,FXD,FILM:100 OHM,1%,0.125W,TC=TO	91637	CMF55116G100ROF
A68A8R6060	315-0332-00			RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A8R6061	315-0121-00			RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R6065	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R6066	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R6070	315-0332-00			RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A8R6075	315-0121-00			RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R7060	315-0332-00			RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A8R7061	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R7062	315-0121-00			RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R7063	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R8010	307-0106-00			RES,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB 4765
A68A8R8026	315-0332-00			RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A8R8027	315-0121-00			RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R8030	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R8035	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R8047	315-0121-00			RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R8048	315-0332-00			RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A8R8050	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R8055	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R8070	304-0681-00			RES,FXD,CMPSN:680 OHM,10%,1W	01121	GB6811
A68A8S4050	260-2031-00			SWITCH,ROCKER:(7)SPST,30VDC,125MA	81073	76S807S
A68A8T4040	120-1237-00			TRANSFORMER,RF:TOROID	80009	120-1237-00
A68A8T5047	120-1338-00			TRANSFORMER,RF:TOROID	80009	120-1338-00
A68A8T7042	120-1237-00			TRANSFORMER,RF:TOROID	80009	120-1237-00
A68A8T7050	120-1338-00			TRANSFORMER,RF:TOROID	80009	120-1338-00
A68A8U3070	156-1235-00			MICROCKT,DGTL:LSTTL,BCD TO DEC DECODER/DR	01295	SN74LS145N3
A68A9	670-9161-00			CIRCUIT BD ASSY:POST VR AMP	80009	670-9161-00
A68A9C1015	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A9C1022	281-0167-00			CAP,VAR,CER DI:9-45PF,200V	33095	53-717-001 D9-45
A68A9C1023	283-0642-00			CAP,FXD,MICA DI:33PF,+/-0.5PF,500V	00853	D105E330G0
A68A9C1029	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A9C1033	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A9C1044	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A9C1052	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Dscont			
A68A9C2018	281-0809-00			CAP,FXD,CER DI:200 PF,5%,100V	04222	MA101A201JAA
A68A9C2019	281-0809-00			CAP,FXD,CER DI:200 PF,5%,100V	04222	MA101A201JAA
A68A9C2023	283-0213-00			CAP,FXD,CER DI:300PF,5%,100V	04222	3429-100A-301J
A68A9C2024	283-0213-00			CAP,FXD,CER DI:300PF,5%,100V	04222	3429-100A-301J
A68A9C2025	283-0213-00			CAP,FXD,CER DI:300PF,5%,100V	04222	3429-100A-301J
A68A9C2026	281-0167-00			CAP,VAR,CER DI:9-45PF,200V	33095	53-717-001 D9-45
A68A9C2033	281-0809-00			CAP,FXD,CER DI:200 PF,5%,100V	04222	MA101A201JAA
A68A9C2034	281-0809-00			CAP,FXD,CER DI:200 PF,5%,100V	04222	MA101A201JAA
A68A9C2038	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A9C2052	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A9C2053	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A9L2021	108-1042-00			COIL,RF:FXD,4.7UH	80009	108-1042-00
A68A9L2031	108-1042-00			COIL,RF:FXD,4.7UH	80009	108-1042-00
A68A9Q1048	151-0446-00			TRANSISTOR:NPN,SI,TO-39	04713	SRF2320
A68A9Q2056	151-0411-00			TRANSISTOR:NPN,SI,TO-39	04713	SRF709
A68A9R1029	315-0470-00			RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A68A9R1039	315-0221-00			RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A68A9R1052	315-0561-00			RES,FXD,FILM:560 OHM,5%,0.25W	19701	5043CX560R0J
A68A9R1058	315-0361-00			RES,FXD,FILM:360 OHM,5%,0.25W	19701	5043CX360R0J
A68A9R2036	321-0114-00			RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150R0F
A68A9R2038	311-0622-00			RES,VAR,NONW:TRMR,100 OHM,0.5W	32997	3329H-L58-101
A68A9R2041	315-0361-00			RES,FXD,FILM:360 OHM,5%,0.25W	19701	5043CX360R0J
A68A9R2042	315-0220-00			RES,FXD,FILM:22 OHM,5%,0.25W	19701	5043CX22R00J
A68A9R2043	321-0001-00			RES,FXD,FILM:10 OHM,1%,0.125W,TC=TO	19701	5033RD10R00FMS
A68A9R2044	301-0561-00			RES,FXD,FILM:560 OHM,5%,0.5W	01121	EB5615
A68A9R2045	301-0561-00			RES,FXD,FILM:560 OHM,5%,0.5W	01121	EB5615
A68A9R2052	315-0331-00			RES,FXD,FILM:330 OHM,5%,0.25W	57668	NTR25J-E330E
A68A9R2062	321-0130-00			RES,FXD,FILM:221 OHM,1%,0.125W,TC=TO	19701	5043ED221R0F
A68A9T1038	120-0459-00			XFMR,TOROID:	80009	120-0459-00
A68A9T1059	120-1237-00			TRANSFORMER,RF:TOROID	80009	120-1237-00
A68A9T2063	120-0902-00			XFMR,TOROID:	80009	120-0902-00
A70	670-7919-03	B010100	B010662	CIRCUIT BD ASSY:Z-AXIS	80009	670-7919-03
A70	670-7919-04	B010663		CIRCUIT BD ASSY:Z-AXIS	80009	670-7919-04
A70C1026	283-0068-00			CAP,FXD,CER DI:0.01UF,+100-0%,500V	59660	871-533E103P
A70C1063	283-0068-00			CAP,FXD,CER DI:0.01UF,+100-0%,500V	59660	871-533E103P
A70C1064	283-0068-00			CAP,FXD,CER DI:0.01UF,+100-0%,500V	59660	871-533E103P
A70C2024	285-0862-00			CAP,FXD,PLASTIC:0.001,10%,100V	19396	DU490/74-28219
A70C2031	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C2035	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C2038	285-1056-00			CAP,FXD,PLASTIC:1UF,2%,50V	14752	650B1A105G
A70C2041	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C2045	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C2051	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C2052	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C2053	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C2054	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A70C2055	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C2058	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A70C3026	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C3029	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C3031	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C3038	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C3039	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C3041	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C3051	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C3053	281-0619-00			CAP,FXD,CER DI:1.2PF,+/-0.1PF,500V	52763	2RDPLZ007 1P20BC
A70C4015	283-0156-00			CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A70C4016	283-0238-00			CAP,FXD,CER DI:0.01UF,10%,50V	04222	SR205C103KAA

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A70C4026	283-0177-00		CAP, FXD, CER DI:1UF, +80-20%, 25V	04222	SR305E105ZAA
A70C4046	283-0167-00		CAP, FXD, CER DI:0.1UF, 10%, 100V	04222	SR301C104KAA
A70C4052	283-0167-00		CAP, FXD, CER DI:0.1UF, 10%, 100V	04222	SR301C104KAA
A70C4057	283-0167-00		CAP, FXD, CER DI:0.1UF, 10%, 100V	04222	SR301C104KAA
A70CR1043	152-0141-02		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR1045	152-0141-02		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR2013	152-0141-02		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR2029	152-0141-02		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR2058	152-0141-02		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR2059	152-0141-02		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR3016	152-0107-00		SEMICON DVC, DI:RECT, SI, 400 V, 400MA, A1	12969	"G727"
A70CR3017	152-0141-02		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR3018	152-0141-02		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR3022	152-0141-02		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR3023	152-0141-02		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR3024	152-0141-02		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR3028	152-0141-02	B010663	SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR3051	152-0141-02		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR3059	152-0107-03		SEMICON DVC, DI:RECT, SI, 400V, 400MA, A1	04713	1N4004
A70CR3060	152-0141-02		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR3066	152-0107-03		SEMICON DVC, DI:RECT, SI, 400V, 400MA, A1	04713	1N4004
A70CR4012	152-0141-02		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR4013	152-0141-02		SEMICON DVC, DI:SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70DS1062	150-1049-00		LT EMITTING DIO:RED/GREEN	72619	521-9354
A70M1019	149-0046-01		METER, T TOTLZ:5000 HRS, 55-700 VDC	80009	149-0046-01
A70Q1015	151-0301-00		TRANSISTOR:PNP, SI, TO-18	80009	151-0301-00
A70Q1017	151-0302-00		TRANSISTOR:NPN, SI, TO-18	04713	ST899
A70Q1028	151-0301-00		TRANSISTOR:PNP, SI, TO-18	80009	151-0301-00
A70Q2011	151-0190-00		TRANSISTOR:NPN, SI, TO-92	80009	151-0190-00
A70Q2022	151-0192-00		TRANSISTOR:NPN, SI, TO-92	04713	SPS8801
A70Q2025	151-0302-00		TRANSISTOR:NPN, SI, TO-18	04713	ST899
A70Q2042	151-0302-00		TRANSISTOR:NPN, SI, TO-18	04713	ST899
A70Q2044	151-0302-00		TRANSISTOR:NPN, SI, TO-18	04713	ST899
A70Q2059	151-0190-00		TRANSISTOR:NPN, SI, TO-92	80009	151-0190-00
A70Q2067	151-0188-00		TRANSISTOR:PNP, SI, TO-92	80009	151-0188-00
A70Q3011	151-0190-00		TRANSISTOR:NPN, SI, TO-92	80009	151-0190-00
A70Q3024	151-0290-00		TRANSISTOR:NPN, SI, TO-39	80009	151-0290-00
A70Q3025	151-0134-00		TRANSISTOR:PNP, SI, TO-39	04713	SM3195
A70Q3028	151-0391-00		TRANSISTOR:DARLINGTON, PNP, SI	04713	SPS6867K
A70Q3047	151-0302-00		TRANSISTOR:NPN, SI, TO-18	04713	ST899
A70Q4058	151-0615-00		TRANSISTOR:NPN, SI, TO-202	80009	151-0615-00
A70Q4059	151-0612-00		TRANSISTOR:PNP, SI	04713	SDS359
A70R1010	307-0696-00		RES NTKW, FXD, FI:7, 10K OHM, 2%, 0.15W EACH	01121	108A103
A70R1015	321-0481-00		RES, FXD, FILM:1M OHM, 1%, 0.125W, TC=TO	19701	5043ED1M000F
A70R1020	315-0103-00		RES, FXD, FILM:10K OHM, 5%, 0.25W	19701	5043CX10K00J
A70R1021	311-1198-00		RES, VAR, NONWW:TRMR, 20K OHM, 0.5W	32997	3386X-T07-203
A70R1022	317-0244-00		RES, FXD, CMPSN:240K OHM, 5%, 0.125W	01121	BB2445
A70R1023	315-0472-00		RES, FXD, FILM:4.7K OHM, 5%, 0.25W	57668	NTR25J-E04K7
A70R1024	315-0472-00		RES, FXD, FILM:4.7K OHM, 5%, 0.25W	57668	NTR25J-E04K7
A70R1025	315-0682-00		RES, FXD, FILM:6.8K OHM, 5%, 0.25W	57668	NTR25J-E06K8
A70R1026	315-0682-00		RES, FXD, FILM:6.8K OHM, 5%, 0.25W	57668	NTR25J-E06K8
A70R1027	311-1245-00		RES, VAR, NONWW:TRMR, 10K OHM, 0.5W	32997	3386X-DY6-103
A70R1028	317-0103-00		RES, FXD, CMPSN:10K OHM, 5%, 0.125W	01121	BB1035
A70R1030	311-1248-00		RES, VAR, NONWW:TRMR, 500 OHM, 0.5W	32997	3386X-T07-501
A70R1044	321-0382-00		RES, FXD, FILM:93.1K OHM, 1%, 0.125W, TC=TO	07716	CEAD93101F
A70R1045	315-0222-00		RES, FXD, FILM:2.2K OHM, 5%, 0.25W	57668	NTR25J-E02K2
A70R1046	315-0222-00		RES, FXD, FILM:2.2K OHM, 5%, 0.25W	57668	NTR25J-E02K2
A70R1050	315-0221-00		RES, FXD, FILM:220 OHM, 5%, 0.25W	57668	NTR25J-E220E

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A70R1051	311-1247-00		RES, VAR, NONWV: TRMR, 1MEG OHM, 0.5W	73138	72XR1MEG-35B
A70R1052	301-0473-00		RES, FXD, FILM: 47K OHM, 5%, 0.5W	19701	5053CX47K00J
A70R1054	315-0221-00		RES, FXD, FILM: 220 OHM, 5%, 0.25W	57668	NTR25J-E220E
A70R1055	315-0102-00		RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A70R1056	321-0193-00		RES, FXD, FILM: 1K OHM, 1%, 0.125W, TC=TO	19701	5033ED1K00F
A70R1058	311-1241-00		RES, VAR, NONWV: TRMR, 100K OHM, 0.5W	32997	3386X-T07-104
A70R1064	301-0104-00		RES, FXD, FILM: 100K OHM, 5%, 0.5W	19701	5053CX100K0J
A70R1065	311-1198-00		RES, VAR, NONWV: TRMR, 20K OHM, 0.5W	32997	3386X-T07-203
A70R1066	301-0473-00		RES, FXD, FILM: 47K OHM, 5%, 0.5W	19701	5053CX47K00J
A70R1067	315-0101-00		RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A70R1068	315-0100-00		RES, FXD, FILM: 10 OHM, 5%, 0.25W	19701	5043CX10RR00J
A70R2022	315-0472-00		RES, FXD, FILM: 4.7K OHM, 5%, 0.25W	57668	NTR25J-E04K7
A70R2024	321-0279-00		RES, FXD, FILM: 7.87K OHM, 1%, 0.125W, TC=TO	07716	CEAD78700F
A70R2025	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A70R2026	315-0682-00		RES, FXD, FILM: 6.8K OHM, 5%, 0.25W	57668	NTR25J-E06K8
A70R2027	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A70R2028	317-0103-00		RES, FXD, CMPSN: 10K OHM, 5%, 0.125W	01121	BB1035
A70R2050	321-0251-00		RES, FXD, FILM: 4.02K OHM, 1%, 0.125W, TC=TO	19701	5033ED4K020F
A70R2051	317-0242-00		RES, FXD, CMPSN: 2.4K OHM, 5%, 0.125W	01121	BB2425
A70R2052	315-0512-00		RES, FXD, FILM: 5.1K OHM, 5%, 0.25W	57668	NTR25J-E05K1
A70R2053	315-0162-00		RES, FXD, FILM: 1.6K OHM, 5%, 0.25W	19701	5043CX1K600J
A70R2054	317-0183-00		RES, FXD, CMPSN: 18K OHM, 5%, 0.125W	01121	BB1835
A70R2055	321-0660-00		RES, FXD, FILM: 417 OHM, 1%, 0.125W, TC=TO	91637	MFF1816G417R0F
A70R2056	317-0912-00		RES, FXD, CMPSN: 9.1K OHM, 5%, 0.125W	01121	BB9125
A70R2057	301-0753-00		RES, FXD, FILM: 75K OHM, 5%, 0.5W	01121	EB7535
A70R2058	317-0101-00		RES, FXD, CMPSN: 100 OHM, 5%, 0.125W	01121	BB1015
A70R2059	321-0318-00		RES, FXD, FILM: 20.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED20K00F
A70R2060	317-0622-00		RES, FXD, CMPSN: 6.2K OHM, 5%, 0.125W	01121	BB6225
A70R2063	315-0272-00		RES, FXD, FILM: 2.7K OHM, 5%, 0.25W	57668	NTR25J-E02K7
A70R2064	315-0471-00		RES, FXD, FILM: 470 OHM, 5%, 0.25W	57668	NTR25J-E470E
A70R2065	317-0201-00		RES, FXD, CMPSN: 200 OHM, 5%, 0.125W	01121	BB2015
A70R2066	315-0563-00		RES, FXD, FILM: 56K OHM, 5%, 0.25W	19701	5043CX56K00J
A70R3010	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A70R3011	315-0102-00		RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A70R3012	315-0102-00		RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A70R3013	315-0102-00		RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A70R3016	315-0202-00		RES, FXD, FILM: 2K OHM, 5%, 0.25W	57668	NTR25J-E 2K
A70R3041	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A70R3045	315-0100-00		RES, FXD, FILM: 10 OHM, 5%, 0.25W	19701	5043CX10RR00J
A70R3050	315-0272-00		RES, FXD, FILM: 2.7K OHM, 5%, 0.25W	57668	NTR25J-E02K7
A70R3051	307-1254-00		RES NTWK, FXD, FI: PWR SUPPLY BALANCE DETECTOR	80009	307-1254-00
A70R3056	321-0431-00		RES, FXD, FILM: 301K OHM, 1%, 0.125W, TC=TO	07716	CEAD30102F
A70R3059	321-0431-00		RES, FXD, FILM: 301K OHM, 1%, 0.125W, TC=TO	07716	CEAD30102F
A70R3060	321-0318-00		RES, FXD, FILM: 20.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED20K00F
A70R4010	315-0102-00		RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A70R4012	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A70R4013	315-0274-00		RES, FXD, FILM: 270K OHM, 5%, 0.25W	57668	NTR25J-E270K
A70R4014	315-0101-00		RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A70R4016	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A70R4024	315-0473-00		RES, FXD, FILM: 47K OHM, 5%, 0.25W	57668	NTR25J-E47K0
A70R4058	315-0100-00		RES, FXD, FILM: 10 OHM, 5%, 0.25W	19701	5043CX10RR00J
A70S3052	260-2031-00		SWITCH, ROCKER: (7) SPST, 30VDC, 125MA	81073	76S807S
A70U2034	156-1335-00		MICROCKT, DGTL: LSTTL, DUAL RETRIGGERABLE RESE TTABLE MONOSTABLE MV, SCRN	80009	156-1335-00
A70U2036	156-0385-02		MICROCKT, DGTL: HEX INVERTER, SCRN	80009	156-0385-02
A70U2038	156-0467-02		MICROCKT, DGTL: QUAD 2-INP NAND BFR W/OC OUT	80009	156-0467-02
A70U2039	156-0452-02		MICROCKT, DGTL: 4-WIDE, 2-INP AOI, SCREENED	04713	SN74LS54 ND/JD
A70U2045	156-0469-02		MICROCKT, DGTL: 3/8 LINE DCDR, SCRN	80009	156-0469-02

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Dscont			
A70U2051	156-1225-01			MICROCKT,LINER:DUAL COMPARATOR,SCREENED	01295	LM393P3
A70U3029	156-0206-02			MICROCKT,DGTL:CORE DRIVER,SCREENED	80009	156-0206-02
A70U3034	156-0206-02			MICROCKT,DGTL:CORE DRIVER,SCREENED	80009	156-0206-02
A70U3038	156-0206-02			MICROCKT,DGTL:CORE DRIVER,SCREENED	80009	156-0206-02
A70U3046	156-0913-02			MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A70U3051	156-1225-01			MICROCKT,LINER:DUAL COMPARATOR,SCREENED	01295	LM393P3
A70U3052	156-0914-02			MICROCKT,DGTL:OCT ST BFR W/3 STATE OUT,SCRN	80009	156-0914-02
A70U4023	156-0067-12			MICROCKT,LINER:OPERATIONAL AMPLIFIER	01295	UA741CJG
A70VR1052	152-0288-00			SEMICON DVC,DI:ZEN,SI,140V,5%,400MW	80009	152-0288-00
A70VR2014	152-0265-00			SEMICON DVC,DI:ZEN,SI,24V,5%,0.4W	04713	1N970B
A70VR2053	152-0662-00			SEMICON DVC,DI:ZEN,SI,5V,1%,400MW,DO-7	04713	SZ6195RL
A70VR2062	152-0087-00			SEMICON DVC,DI:ZEN,SI,100V,5%,1W,A31A	04713	SZ1627RL
A70VR3015	152-0281-00			SEMICON DVC,DI:ZEN,SI,22V,5%,0.4W,DO-7	12954	1N969B/DO-35
A72	670-9090-01	B010100	B010200	CIRCUIT BD ASSY:SWEEP	80009	670-9090-01
A72	670-9090-02	B010201	B010389	CIRCUIT BD ASSY:SWEEP	80009	670-9090-02
A72	670-9090-03	B010390	B010482	CIRCUIT BD ASSY:SWEEP	80009	670-9090-03
A72	670-9090-04	B010483		CIRCUIT BD ASSY:SWEEP	80009	670-9090-04
A72C1010	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C1020	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C1030	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C1044	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C1046	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C1061	295-0171-00			CAP SET,MATCHED:510PF,5UF,0.05UF,MATCHED 1%	84411	TEK140UF(ST)5100
A72C1065	295-0171-00			CAP SET,MATCHED:510PF,5UF,0.05UF,MATCHED 1%	84411	TEK140UF(ST)5100
A72C2018	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C2019	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C2030	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C2040	283-5001-00			CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A72C2042	283-5001-00			CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A72C2044	283-5001-00			CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A72C2046	283-0212-00			CAP,FXD,CER DI:2UF,20%,50V	04222	SR405E205MAA
A72C2048	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C2050	283-5001-00			CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A72C2054	290-0973-00			CAP,FXD,ELCTL:100UF,20%,25VDC	55680	ULB1E101MPA
A72C2060	295-0171-00			CAP SET,MATCHED:510PF,5UF,0.05UF,MATCHED 1%	84411	TEK140UF(ST)5100
A72C3012	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C3018	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C3025	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C3027	283-0212-00			CAP,FXD,CER DI:2UF,20%,50V	04222	SR405E205MAA
A72C3030	290-5001-00			CAP,FXD,ELCTL:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A72C3032	283-5003-00			CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A72C3034	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C3036	283-5001-00			CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A72C3038	283-0212-00			CAP,FXD,CER DI:2UF,20%,50V	04222	SR405E205MAA
A72C3039	283-5001-00			CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A72C3040	283-5000-00			CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A100JXA
A72C3042	290-0943-00			CAP,FXD,ELCTL:47UF,+50-20%,25V	55680	ULB1E470TAAANA
A72C3044	290-0943-00			CAP,FXD,ELCTL:47UF,+50-20%,25V	55680	ULB1E470TAAANA
A72C3045	283-0108-00	B010483		CAP,FXD,CER DI:220PF,10%,200V	04222	SR152A221KAA
A72C3046	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C3050	290-0768-00			CAP,FXD,ELCTL:10UF,+50-20%,100WVDC	54473	ECE-A100V10L
A72C3052	283-5003-00			CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A72C3054	283-5001-00			CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A72C3056	283-5003-00			CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A72C3058	283-5003-00			CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A72C4025	283-5003-00			CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A72C4036	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C4040	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A72C4042	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C4044	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C4046	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C4048	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C4050	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C4052	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C4058	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72CR1051	152-0246-00	B010100	8010714	SEMICON DVC,DI:SW,SI,40V,200MA,DO-7	14433	WG1537TK
A72CR1051	152-0324-00	B010715		SEMICON DVC,DI:SW,SI,35V,0.1A,DO-7	14552	MT5128
A72CR1052	152-0246-00	B010100	8010714	SEMICON DVC,DI:SW,SI,40V,200MA,DO-7	14433	WG1537TK
A72CR1052	152-0324-00	B010715		SEMICON DVC,DI:SW,SI,35V,0.1A,DO-7	14552	MT5128
A72CR2030	152-5004-00			SEMICON DVC,DI:SI,SW,SER PR,70V	04713	BAV99T1
A72CR3030	152-5005-00			SEMICON DVC,DI:DUAL,COMMON ANODE,70V,BAW56	04713	MBAW56TI
A72CR3040	152-5004-00			SEMICON DVC,DI:SI,SW,SER PR,70V	04713	BAV99T1
A72CR4025	152-5004-00			SEMICON DVC,DI:SI,SW,SER PR,70V	04713	BAV99T1
A72L4040	108-0417-01			COIL,RF:FIXED,110UH	80009	108-0417-01
A72Q1062	151-5002-00			TRANSISTOR:JFET,N-CH,RDS=60	04713	MMBF4392T1
A72Q2030	151-0232-00			TRANSISTOR:NPN,SI,DUAL,TO-78	07263	SP12141
A72Q2060	151-5002-00			TRANSISTOR:JFET,N-CH,RDS=60	04713	MMBF4392T1
A72Q2064	151-5002-00			TRANSISTOR:JFET,N-CH,RDS=60	04713	MMBF4392T1
A72Q2068	151-5002-00			TRANSISTOR:JFET,N-CH,RDS=60	04713	MMBF4392T1
A72Q3015	151-5001-00			TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A72Q3020	151-5001-00			TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A72Q3025	151-5001-00			TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A72Q3030	151-0232-00			TRANSISTOR:NPN,SI,DUAL,TO-78	07263	SP12141
A72Q4032	151-5001-00			TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A72Q4037	151-5001-00			TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A72R1010	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R1020	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R1050	321-5017-00			RES,FXD,FILM:825 OHM,1%,0.125W	01121	BCK8250FT
A72R1051	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R1052	311-1239-00			RES,VAR,NONWV:TRMR,2.5K OHM,0.5W	32997	3386X-T07-252
A72R1053	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R1055	321-5029-00			RES,FXD,FILM:8.25K,1%,0.125W	01121	BCK8251FT
A72R1057	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R1059	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R1060	321-0384-00			RES,FXD,FILM:97.6K OHM,1%,0.125W,TC=TO	07716	CEAD97601F
A72R1062	311-1240-00			RES,VAR,NONWV:TRMR,25K OHM,10%,0.5W	32997	3386X-T07-253
A72R1064	321-5047-00			RES,FXD,FILM:100K,1%,0.125W	01121	BCK1003FT
A72R1066	321-5015-00			RES,FXD,FILM:562 OHM,1%,0.125W	01121	BCK5620FT
A72R1068	321-0393-00			RES,FXD,FILM:121K OHM,1%,0.125W,TC=TO	19701	5043ED121KOF
A72R2010	321-0163-00			RES,FXD,FILM:487 OHM,1%,0.125W,TC=TO	07716	CEAD487ROF
A72R2012	321-0256-00			RES,FXD,FILM:4.53K OHM,1%,0.125W,TC=TO	19701	5033ED4K530F
A72R2013	321-5047-00			RES,FXD,FILM:100K,1%,0.125W	01121	BCK1003FT
A72R2015	321-5032-00			RES,FXD,FILM:15.0K,1%,0.125W	01121	BCK1502FT
A72R2017	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R2018	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R2019	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R2020	321-5015-00			RES,FXD,FILM:562 OHM,1%,0.125W	01121	BCK5620FT
A72R2022	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R2024	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R2026	321-5023-00			RES,FXD,FILM:2.74K,1%,0.125W	01121	BCK2741FT
A72R2028	321-5021-00			RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A72R2030	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R2031	317-0104-00	B010201		RES,FXD,CMPSN:100K OHM,5%,0.125W	01121	BB1045
A72R2032	321-5023-00	B010100	8010200	RES,FXD,FILM:2.74K,1%,0.125W	01121	BCK2741FT
A72R2032	321-5022-00	B010201		RES,FXD,FILM:2.21K,1%,0.125W	01121	BCK2211FT
A72R2034	321-5023-00	B010100	8010200	RES,FXD,FILM:2.74K,1%,0.125W	01121	BCK2741FT



Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discount	Name & Description	Mfr. Code	Mfr. Part No.
A72R2034	321-5019-00	B010201	B010389	RES,FXD,FILM:1.21K,1%,0.125W	01121	BCK1211FT
A72R2034	321-5018-00	B010390		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A72R2036	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R2040	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R2042	321-5028-00			RES,FXD,FILM:6.81K,1%,0.125W	01121	BCK6811FT
A72R2044	315-0302-00			RES,FXD,FILM:3K OHM,5%,0.25W	57668	NTR25J-E03KO
A72R2046	321-5026-00			RES,FXD,FILM:4.75K,1%,0.125W	01121	BCK4751FT
A72R2048	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R2050	321-5023-00			RES,FXD,FILM:2.74K,1%,0.125W	01121	BCK2741FT
A72R2052	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R2054	321-5006-00			RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A72R2060	321-5048-00			RES,FXD,FILM:332K,1%,0.125W	01121	BCK3323FT
A72R2064	321-5047-00			RES,FXD,FILM:100K,1%,0.125W	01121	BCK1003FT
A72R2068	321-5047-00			RES,FXD,FILM:100K,1%,0.125W	01121	BCK1003FT
A72R2069	321-5026-00			RES,FXD,FILM:4.75K,1%,0.125W	01121	BCK4751FT
A72R3010	321-0259-00			RES,FXD,FILM:4.87K OHM,1%,0.125W,TC=TO	07716	CEAD48700F
A72R3012	315-0106-00			RES,FXD,FILM:10M OHM,5%,0.25W	01121	CB1065
A72R3014	321-5006-00			RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A72R3016	321-5006-00			RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A72R3018	321-5021-00			RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A72R3020	321-5023-00			RES,FXD,FILM:2.74K,1%,0.125W	01121	BCK2741FT
A72R3021	321-5021-00			RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A72R3022	321-5032-00			RES,FXD,FILM:15.0K,1%,0.125W	01121	BCK1502FT
A72R3023	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R3024	321-5049-00			RES,FXD,FILM:1 MEG,1%,0.125W	01121	BCK1004FT
A72R3025	321-5023-00			RES,FXD,FILM:2.74K,1%,0.125W	01121	BCK2741FT
A72R3026	321-5032-00			RES,FXD,FILM:15.0K,1%,0.125W	01121	BCK1502FT
A72R3027	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R3028	315-0475-00			RES,FXD,FILM:4.7M OHM,5%,0.25W	01121	CB4755
A72R3029	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R3030	321-5047-00			RES,FXD,FILM:100K,1%,0.125W	01121	BCK1003FT
A72R3031	321-5013-00			RES,FXD,FILM:392 OHM,1%,0.125W	01121	BCK3920FT
A72R3032	321-5023-00	B010100	B010389	RES,FXD,FILM:2.74K,1%,0.125W	01121	BCK2741FT
A72R3032	321-5018-00	B010390		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A72R3033	321-5024-00	B010100	B010389	RES,FXD,FILM:3.32K,1%,0.125W	01121	BCK3321FT
A72R3033	321-5022-00	B010390		RES,FXD,FILM:2.21K,1%,0.125W	01121	BCK2211FT
A72R3034	321-5023-00			RES,FXD,FILM:2.74K,1%,0.125W	01121	BCK2741FT
A72R3035	321-5024-00			RES,FXD,FILM:3.32K,1%,0.125W	01121	BCK3321FT
A72R3036	321-5021-00			RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A72R3037	321-5036-00			RES,FXD,FILM:33.2K,1%,0.125W	01121	BCK3322FT
A72R3038	317-0154-00	B010390		RES,FXD,CMPSN:150K OHM,5%,0.125	01121	BB1545
A72R3040	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R3042	321-0317-00			RES,FXD,FILM:19.6K OHM,1%,0.125W,TC=TO	07716	CEAD19601F
A72R3043	321-0277-00			RES,FXD,FILM:7.50K OHM,1%,0.125W,TC=TO	24546	NA55D7501F
A72R3044	321-5018-00			RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A72R3045	321-5004-00			RES,FXD,FILM:22.1 OHM,1%,0.125W	57668	MCR18FWEA22E1
A72R3047	321-5026-00			RES,FXD,FILM:4.75K,1%,0.125W	01121	BCK4751FT
A72R3049	321-5026-00			RES,FXD,FILM:4.75K,1%,0.125W	01121	BCK4751FT
A72R3050	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R3051	321-5028-00			RES,FXD,FILM:6.81K,1%,0.125W	01121	BCK6811FT
A72R3052	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R3053	321-5043-00			RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A72R3054	321-5025-00			RES,FXD,FILM:3.92K,1%,0.125W	01121	BCK3921FT
A72R3055	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R3056	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R3057	321-5043-00			RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A72R3058	321-5033-00			RES,FXD,FILM:18.2K,1%,0.125W	01121	BCK1822FT
A72R3059	321-0352-00			RES,FXD,FILM:45.3K OHM,1%,0.125W,TC=TO	07716	CEAD45301F

Replaceable Electrical Parts  
492A/492AP Service Vol. 2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A72R3060	321-0280-00		RES, FXD, FILM: 8.06K OHM, 1%, 0.125W, TC=TO	19701	5033ED8K060F
A72R3062	321-0807-00		RES, FXD, FILM: 900K OHM, 1%, 0.125W, TC=TO	19701	5033RD900K0F
A72R3064	321-1627-06		RES, FXD, FILM: 731.3K OHM, 0.25%, 0.125W, TC=T9	19701	5033RE731K32C
A72R3066	321-0510-07		RES, FXD, FILM: 2.00 MEG OHM, 0.1%, 0.125W, TC=T9	19701	5033RE2M00B
A72R4010	321-5032-00		RES, FXD, FILM: 15.0K, 1%, 0.125W	01121	BCK1502FT
A72R4012	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A72R4014	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A72R4016	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A72R4020	321-5018-00		RES, FXD, FILM: 1.00K, 1%, 0.125W	01121	BCK1001FT
A72R4022	321-5006-00		RES, FXD, FILM: 100 OHM, 1%, 0.125W	01121	BCK1000FT
A72R4024	321-5006-00		RES, FXD, FILM: 100 OHM, 1%, 0.125W	01121	BCK1000FT
A72R4026	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A72R4032	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A72R4036	321-5006-00		RES, FXD, FILM: 100 OHM, 1%, 0.125W	01121	BCK1000FT
A72R4040	321-5043-00		RES, FXD, FILM: 47.5 OHM, 1%, 0.125W	57668	MCR18FWEA47E5
A72R4042	321-5043-00		RES, FXD, FILM: 47.5 OHM, 1%, 0.125W	57668	MCR18FWEA47E5
A72R4044	321-5043-00		RES, FXD, FILM: 47.5 OHM, 1%, 0.125W	57668	MCR18FWEA47E5
A72R4046	321-5000-00		RES, FXD, FILM: 10 OHM, 1%, 0.125W	57668	MCR18EZHFW10E
A72R4048	321-5027-00		RES, FXD, FILM: 5.62K, 1%, 0.125W	01121	BCK5621FT
A72R4050	321-5006-00		RES, FXD, FILM: 100 OHM, 1%, 0.125W	01121	BCK1000FT
A72R4054	321-0303-00		RES, FXD, FILM: 14.0K OHM, 1%, 0.125W, TC=TO	07716	CEAD 14001F
A72R4056	321-5018-00		RES, FXD, FILM: 1.00K, 1%, 0.125W	01121	BCK1001FT
A72R4060	321-0367-00		RES, FXD, FILM: 64.9K OHM, 1%, 0.125W, TC=TO	07716	CEAD64901F
A72R4061	321-0350-00		RES, FXD, FILM: 43.2K OHM, 1%, 0.125W, TC=TO	19701	5043ED43K20F
A72R4062	321-0307-00		RES, FXD, FILM: 15.4K OHM, 1%, 0.125W, TC=TO	19701	5043ED15K40F
A72R4063	321-0350-00		RES, FXD, FILM: 43.2K OHM, 1%, 0.125W, TC=TO	19701	5043ED43K20F
A72R4064	321-0983-00		RES, FXD, FILM: 4.5 MEG OHM, 1%, 0.125W, TC=TO	91637	CMF55116-G45003F
A72R4065	321-0321-00		RES, FXD, FILM: 21.5K OHM, 1%, 0.125W, TC=TO	07716	CEAD21501F
A72R4066	321-1484-03		RES, FXD, FILM: 1.09M OHM, 0.25%, 0.125W	91637	HFF188D10903C
A72R4067	321-0995-00		RES, FXD, FILM: 549K OHM, 1%, 0.125W, TC=TO	24546	NA55D5493F
A72R4068	321-0427-00		RES, FXD, FILM: 274K OHM, 1%, 0.125W, TC=TO	24546	NA55D2743F
A72R4069	321-1388-01		RES, FXD, FILM: 109K OHM, 0.5%, 0.125W, TC=TO	24546	NA55D1093D
A72U1010	156-5003-00		MICROCKT, DGTL: LSTTL, DUAL D-TYPE FF	01295	SN74LS74D
A72U1015	156-5037-00		MICROCKT, DGTL: LSTTL, HEX INVERTER, SCHMITT	01295	SN74LS14D
A72U1016	156-5003-00		MICROCKT, DGTL: LSTTL, DUAL D-TYPE FF	01295	SN74LS74D
A72U1017	156-5042-00		MICROCKT, DGTL: TTL, HEX INV BUFFER/DRVR W/OC OUTPUTS	01295	SN7406D
A72U1020	156-5001-00		MICROCKT, DGTL: LSTTL, QUAD 2 INPUT NAND GATE	01295	SN74LS00D
A72U1025	156-5003-00		MICROCKT, DGTL: LSTTL, DUAL D-TYPE FF	01295	SN74LS74D
A72U1026	156-5001-00		MICROCKT, DGTL: LSTTL, QUAD 2 INPUT NAND GATE	01295	SN74LS00D
A72U1027	156-5039-00		MICROCKT, DGTL: LSTTL, HEX D TYPE FF W/Common	80009	156-5039-00
A72U1030	156-5033-00		MICROCKT, DGTL: LSTTL, 3 TO 8 LINE DCDR/DEMUX	18324	74LS138D
A72U1035	156-5039-00		MICROCKT, DGTL: LSTTL, HEX D TYPE FF W/Common	80009	156-5039-00
A72U1040	156-5039-00		MICROCKT, DGTL: LSTTL, HEX D TYPE FF W/Common	80009	156-5039-00
A72U1045	156-5009-00		MICROCKT, DGTL: OCTAL D FF W/CLEAR	80009	156-5009-00
A72U1047	156-1548-01		MICROCKT, INTFC: CMOS, D/A CONVERTER, 12 BIT, CURRENT OUT, MULTIPLYING, AD7541AJN, DIP18.3	51640	AD7541AJN
A72U1050	156-1270-00		MICROCKT, LINEAR: 8 CHAN ANALOG MULTIPLEXER	80009	156-1270-00
A72U1055	156-1582-00		MICROCKT, LINEAR: OPERATIONAL AMPL, BIPOLAR	80009	156-1582-00
A72U1060	156-5019-00		MICROCKT, LINEAR: DUAL, SGL SPLY, V COMPTR	80009	156-5019-00
A72U2010	156-5001-00		MICROCKT, DGTL: LSTTL, QUAD 2 INPUT NAND GATE	01295	SN74LS00D
A72U2011	156-5047-00		MICROCKT, DGTL: LSTTL, QUAD 2 TO 1 MUX	18324	74LS157DT1
A72U2015	156-5040-00		MICROCKT, DGTL: LSTTL, QUAD 2-INPUT EXCLUSIVE	01295	SN74LS266D
A72U2017	156-5003-00		MICROCKT, DGTL: LSTTL, DUAL D-TYPE FF	01295	SN74LS74D
A72U2020	156-5032-00		MICROCKT, DGTL: LSTTL, QUAD 2 INP NOR GATE	18324	N74LS02D
A72U2025	156-5003-00		MICROCKT, DGTL: LSTTL, DUAL D-TYPE FF	01295	SN74LS74D
A72U2026	156-5038-00		MICROCKT, DGTL: LSTTL, DUAL 4-INPUT MUX W/ENABLE	80009	156-5038-00

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A72U2030	156-5039-00			MICROCKT,DGTL:LSTTL,HEX D TYPE FF W/COMMON	80009	156-5039-00
A72U2040	156-1582-00			MICROCKT,LINEAR:OPERATIONAL AMPL,BIPOLAR	80009	156-1582-00
A72U2045	156-1582-00			MICROCKT,LINEAR:OPERATIONAL AMPL,BIPOLAR	80009	156-1582-00
A72U2050	156-5019-00			MICROCKT,LINEAR:DUAL,SGL SPLY,V COMPTR	80009	156-5019-00
A72U3010	156-5019-00			MICROCKT,LINEAR:DUAL,SGL SPLY,V COMPTR	80009	156-5019-00
A72U3025	156-5019-00			MICROCKT,LINEAR:DUAL,SGL SPLY,V COMPTR	80009	156-5019-00
A72U3045	156-0742-00			MICROCKT,LINEAR:OPNL AMPL	01295	LM318P
A72U3050	156-5017-00			MICROCKT,LINEAR:DUAL 741 OP AMP,1MZ,S0-8	04713	MC1458
A72U3060	156-1270-00			MICROCKT,LINEAR:8 CHAN ANALOG MULTIPLEXER	80009	156-1270-00
A72U4010	156-5001-00			MICROCKT,DGTL:LSTTL,QUAD 2 INPUT NAND GATE	01295	SN74LS00D
A72U4015	156-5041-00			MICROCKT,DGTL:LSTTL,HEX BUS DRVR	80009	156-5041-00
A72U4020	156-5034-00			MICROCKT,DGTL:LSTTL,OCTAL BFR W/3 STATE OUT	18324	N74LS244D
A72U4030	156-5033-00			MICROCKT,DGTL:LSTTL,3 TO 8 LINE DCDR/DEMUX	18324	74LS138D
A72U4050	156-0512-03			MICROCKT,LINEAR:OPNL AMPL	04713	LM308J-8
A72U4055	156-1249-00			MICROCKT,LINEAR:VOLTAGE REFERENCE	24355	AD40227
A72VR1053	152-5007-00			SEMICON DVC,DI:ZENER,SI,9.1V,5%	80009	152-5007-00
A72VR1062	152-5007-00			SEMICON DVC,DI:ZENER,SI,9.1V,5%	80009	152-5007-00
A72VR4058	152-0127-00			SEMICON DVC,DI:ZEN,SI,7.5V,5%,0.4W,DO-7	04713	IN958B
A74	670-5559-04	B010100	B010259	CIRCUIT BD ASSY:HIGH VOLTAGE	80009	670-5559-04
A74	670-5559-06	B010260	B010584	CIRCUIT BD ASSY:HIGH VOLTAGE	80009	670-5559-06
A74	670-5559-07	B010585		CIRCUIT BD ASSY:HIGH VOLTAGE	80009	670-5559-07
A74C1038	283-0177-00			CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A74C1043	283-0208-00			CAP,FXD,CER DI:0.22UF,10%,200V	04222	SR502C224KAA
A74C1058	283-0728-00			CAP,FXD,MICA DI:120PF,1%,500V	00853	D155F121FO
A74C2084	290-0414-00			CAP,FXD,ELCTLT:8UF,+50-10%,200V	56289	600D805F2000E4
A74C3073	283-0197-00			CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A74C3076	283-0220-03	B010100	B010584	CAP,FXD,CER DI:0.01UF,20%,50V SQUARE	04222	SR155C103MAA
A74C3076	283-0167-00	B010585		CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A74C3086	283-0198-00			CAP,FXD,CER DI:0.22UF,20%,50V	05397	C330C224M5U1CA
A74C3088	283-0198-00			CAP,FXD,CER DI:0.22UF,20%,50V	05397	C330C224M5U1CA
A74C4072	283-0210-00			CAP,FXD,CER DI:0.0056UF,20%,100V	04222	SR211C562MAA
A74CR1044	152-0107-03			SEMICON DVC,DI:RECT,SI,400V,400MA,A1	04713	1N4004
A74CR1046	152-0242-00			SEMICON DVC,DI:SIG,SI,225V,0.2A,DO-7	07263	FDH5004
A74CR1047	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A74CR1048	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A74CR1056	152-0242-00			SEMICON DVC,DI:SIG,SI,225V,0.2A,DO-7	07263	FDH5004
A74CR1079	152-0107-03			SEMICON DVC,DI:RECT,SI,400V,400MA,A1	04713	1N4004
A74CR1086	152-0400-00			SEMICON DVC,DI:RECT,SI,400V,1A	04713	1N4936RL
A74CR2044	152-0242-00			SEMICON DVC,DI:SIG,SI,225V,0.2A,DO-7	07263	FDH5004
A74CR2046	152-0242-00			SEMICON DVC,DI:SIG,SI,225V,0.2A,DO-7	07263	FDH5004
A74CR3077	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A74CR4071	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A74CR4077	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A74CR4078	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A74Q1073	151-0423-00			TRANSISTOR:NPN,SI,TO-220AB	80009	151-0423-00
A74Q2048	151-0443-00			TRANSISTOR:PNP,SI,TO-92	04713	SPS7950
A74R151	315-0334-00			RES,FXD,FILM:330K OHM,5%,0.25W	57668	NTR25J-E 330K
A74R1042	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A74R1043	301-0472-00			RES,FXD,FILM:4.7K OHM,5%,0.5W	19701	5053CX4K700J
A74R1048	315-0224-00			RES,FXD,FILM:220K OHM,5%,0.25W	57668	NTR25J-E220K
A74R2012	308-0581-00			RES,FXD,W:4.75 OHM,0.5%,0.5W	00213	500S 4R750D
A74R2040	311-1287-00			RES,VAR,NONW:TRMR,100K OHM,0.5W	32997	3329S-L58-104
A74R2050	315-0104-00			RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A74R3033	311-1968-00			RES,VAR,NONW:PNL,5M OHM,20%,0.5W	01121	72M4N048S505M
A74R3071	315-0431-00	B010100	B010584	RES,FXD,FILM:430 OHM,5%,0.25W	19701	5043CX430R0J
A74R3071	315-0221-00	B010585		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A74R3072	315-0512-00	B010100	B010584	RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A74R3072	315-0392-00	B010585		RES,FXD,FILM:3.9K OHM,5%,0.25W	57668	NTR25J-E03K9

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Discont			
A74R3074	315-0105-00			RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A74R3075	315-0222-00			RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A74R3078	315-0133-00			RES,FXD,FILM:13K OHM,5%,0.25W	19701	5043CX13K00J
A74R3079	315-0184-00			RES,FXD,FILM:180K OHM,5%,0.25W	19701	5043CX180K0J
A74R4038	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A74R4074	315-0473-00			RES,FXD,FILM:47K OHM,5%,0.25W	57668	NTR25J-E47K0
A74R4075	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A74T2065	120-1233-00			XFMR,PWR,SDN&SU:HIGH VOLTAGE	80009	120-1233-00
A74U4083	156-0067-12			MICROCKT,LINEAR:OPERATIONAL AMPLIFIER	01295	UA741CJG
A74VR1041	152-0283-00			SEMICONDCVC,DI:ZEN,SI,43V,5%,0.4W,D-07	04713	1N976B
A74A1	119-1159-01			CIRCUIT BD ASSY:HIGH VOLTAGE	80009	119-1159-01
A74A1	-----			(PART OF A74)		
A77	670-5746-01			CIRCUIT BD ASSY:CRT GRATICULE LIGHT	80009	670-5746-01
A77DS1011	150-0029-00			LAMP,INCAND:6.3V,0.2A,#349,MIDGET FLG	58854	349
A77DS1013	150-0029-00			LAMP,INCAND:6.3V,0.2A,#349,MIDGET FLG	58854	349
A77P770	131-0592-00			TERMINAL,PIN:0.885 L X 0.025 SQ BRS GOLD PL	22526	47333
F301	159-0017-00			FUSE,CARTRIDGE:3AG,4A,250V,FAST BLOW	71400	MTH-CW-4
F301	159-0023-00			FUSE,CARTRIDGE:3AG,2A,250V,SLOW BLOW (OPTIONS A1,A2,A3,A4,A5 ONLY)	71400	MDX2
FL10	119-0294-01			FILTER,LOW PASS:DC TO 1.8GHZ (OPTION 01 ONLY)	50140	11L250-X1800-0
FL11	119-1753-00			FLTR CA ASSY,RF:50 OHM COAX,7.14 L,SEMI-RGD	80009	119-1753-00
FL12	119-2048-00			FLTR,YIG TUNED: (OPTION 01 ONLY)	80009	119-2048-00
FL15	119-1752-00			FLTR CA ASSY,RF:50 OHM COAX,7.12 L,SEMI-RGD	80009	119-1752-00
FL16	119-1018-00			DIR FILTER ASSY:	80009	119-1018-00
FL36	119-1025-00			FILTER,BANDPASS:110MHZ	80009	119-1025-00
FL680	119-2033-00			FILTER,CRYSTAL:100HZ BW,10MHZ CF	34630	001-43360
P110	015-1025-01	B010100	B010667	TERMN,COAXIAL:3MM MALE 50OHM W/CH	18203	T186CS
P110	015-1022-00	B010668		TERMN,COAXIAL:50 OHM,0.5W,SMA (OPTION 31 ONLY)	18203	T198CS
P112	015-1025-01	B010100	B010667	TERMN,COAXIAL:3MM MALE 50OHM W/CH	18203	T186CS
P112	015-1022-00	B010668		TERMN,COAXIAL:50 OHM,0.5W,SMA (OPTION 31 ONLY)	18203	T198CS
P133	015-1022-00			TERMN,COAXIAL:50 OHM,0.5W,SMA	18203	T198CS
P144	015-1022-00			TERMN,COAXIAL:50 OHM,0.5W,SMA	18203	T198CS
P145	015-1022-00			TERMN,COAXIAL:50 OHM,0.5W,SMA	18203	T198CS
P164	015-1022-00			TERMN,COAXIAL:50 OHM,0.5W,SMA	18203	T198CS
P222	131-0938-00			CONN,RCPT,ELEC:SMB,FEMALE	24931	32JR125-1
P620	131-0372-00			CONN,RCPT,ELEC:CON-HEX,MALE	24931	32JR104-1
P621	131-0372-00			CONN,RCPT,ELEC:CON-HEX,MALE	24931	32JR104-1
P800	015-1025-01	B010100	B010667	TERMN,COAXIAL:3MM MALE 50OHM W/CH	18203	T186CS
P800	015-1022-00	B010668		TERMN,COAXIAL:50 OHM,0.5W,SMA	18203	T198CS
P900	015-1025-01	B010100	B010667	TERMN,COAXIAL:3MM MALE 50OHM W/CH	18203	T186CS
P900	015-1022-00	B010668		TERMN,COAXIAL:50 OHM,0.5W,SMA	18203	T198CS
S11	119-1161-01			SW,RF XMSN LINE:DC TO 21GHZ,60 DB ISLN (OPTION 01 ONLY)	24022	CS33S90-8
S12	119-1161-01			SW,RF XMSN LINE:DC TO 21GHZ,60 DB ISLN (OPTION 01 ONLY)	24022	CS33S90-8
S13	119-1161-01			SW,RF XMSN LINE:DC TO 21GHZ,60 DB ISLN (OPTION 01 ONLY)	24022	CS33S90-8
T200	120-1545-00			TRANSFORMER,RF:75 OHM BNC INPUT/50 OHM SMA OUTPUT (OPTION 07 ONLY)	98821	NH-12296
V100	154-0809-00	B010100	B010572	ELECTRON TUBE:CRT,P-GREEN D,INTERNAL	80009	154-0809-00
V100	154-0910-00	B010573		ELECTRON TUBE:CRT,P31,A284C	80009	154-0910-00
W100	174-0222-00	B010100	B010303	CABLE ASSY,RF:50 OHM COAX,1.23 L	80009	174-0222-00

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
W100	174-0222-01	B010304	CABLE ASSY,RF:50 OHM COAX,1.23 L	80009	174-0222-01
W100	175-7400-01		CABLE ASSY,RF:50 OHM COAX,MW SWITCH TO ATTE NUATOR,SEMI-RIGID (OPTION 01 ONLY)	80009	175-7400-01
W101	175-7401-02		CABLE ASSY,RF:50 OHM COAX,RF CONNECTOR TO A TTENUATOR,SEMI-RIGID	80009	175-7401-02
W102	175-9262-00		CABLE ASSY,RF:50 OHM COAX,4.224 L (OPTION 01 ONLY)	80009	175-9262-00
W104	175-9261-00		CABLE ASSY,RF:50 OHM COAX,7.572 L (OPTION 01 ONLY)	80009	175-9261-00
W106	175-9582-00		CABLE ASSY,RF:50 OHM COAX,2.82 L (OPTION 01 ONLY)	80009	175-9582-00
W112	175-7403-01		CABLE ASSY,RF:50 OHM COAX,1.949 L,SEMI RIGI D (OPTION 01 ONLY)	80009	175-7403-01
W114	175-2530-02		CABLE ASSY,RF:50 OHM COAX,6.34 L (OPTION 01 ONLY)	80009	175-2530-02
W116	175-9263-00		CABLE ASSY,RF:50 OHM COAX,2.94 L (OPTION 01 ONLY)	80009	175-9263-00
W117	174-0924-00		CABLE ASSY,RF:50 OHM COAX	80009	174-0924-00
W124	175-2542-00		CABLE ASSY,RF:50 OHM COAX,2.62 L	80009	175-2542-00
W125	175-3024-03		CABLE ASSY,RF:50 OHM COAX,6.89 L (OPTION 07 & 08 ONLY)	80009	175-3024-03
W126	175-7402-01		CABLE ASSY,RF:50 OHM COAX,1.737 L,SEMI-RIGI D (OPTION 01 ONLY)	80009	175-7402-01
W130	175-2345-00		CABLE ASSY,RF:50 OHM COAX,10.29 L	80009	175-2345-00
W132	175-2762-02		CABLE ASSY,RF:50 OHM COAX,17.56 L	80009	175-2762-02
W137	175-9196-01		CABLE ASSY,RF:50 OHM COAX,W/O JKT,SEMI RIGI D,TRANS SWC TO EXT MIX	80009	175-9196-01
W138	175-2541-02		CABLE ASSY,RF:50 OHM COAX,6.1 L	80009	175-2541-02
W162	175-7399-01		CABLE ASSY,RF:50 OHM COAX,DIR FILTER TO DIP LEXER IN,SEMI-RIGID	80009	175-7399-01
W164	175-7399-01		CABLE ASSY,RF:50 OHM COAX,DIR FILTER TO DIP LEXER IN,SEMI-RIGID	80009	175-7399-01
W166	175-2763-00		CABLE ASSY,RF:50 OHM COAX,3.13 L	80009	175-2763-00
W182	175-2406-00		CABLE ASSY,RF:50 OHM COAX,3.0 L	80009	175-2406-00
W190	175-2415-00		CABLE ASSY,RF:50 OHM COAX,7.0 L (OPTION 42 ONLY)	80009	175-2415-00
W191	175-2415-00		CABLE ASSY,RF:50 OHM COAX,7.0 L (OPTION 42 ONLY)	80009	175-2415-00
W220	175-4542-00		CABLE ASSY,RF:50 OHM COAX,8.9 L,SEMIRIGID	80009	175-4542-00
W224	175-7601-00		CABLE ASSY,RF:50 OHM COAX,20.35 L	80009	175-7601-00
W232	175-2407-00		CABLE ASSY,RF:50 OHM COAX,5.0 L	80009	175-2407-00
W236	175-9195-01		CABLE ASSY,RF:50 OHM COAX SEMI-RIGID	80009	175-9195-01
W240	175-7397-00		CABLE ASSY,RF:50 OHM COAX,HARMONIC MIXER TO PHASE GATE,SEMI RIGID	80009	175-7397-00
W250	175-7398-00		CABLE ASSY,RF:50 OHM COAX,HARMONIC MIXER TO BIAS RETURN,SEMI RIGID	80009	175-7398-00
W252	175-7602-00		CABLE ASSY,RF:50 OHM COAX,18.35 L	80009	175-7602-00
W260	175-7600-00		CABLE ASSY,RF:50 OHM COAX,20.35 L	80009	175-7600-00
W320	175-2406-00		CABLE ASSY,RF:50 OHM COAX,3.0 L	80009	175-2406-00
W340	175-9254-00		CABLE ASSY,RF:50 OHM COAX,17.52 L	80009	175-9254-00
W341	175-2415-00		CABLE ASSY,RF:50 OHM COAX,7.0 L (OPTION 07 ONLY)	80009	175-2415-00
W342	175-2413-00		CABLE ASSY,RF:50 OHM COAX,13.0 L	80009	175-2413-00
W344	175-2411-00		CABLE ASSY,RF:50 OHM COAX,17.0 L	80009	175-2411-00
W346	175-2409-00		CABLE ASSY,RF:50 OHM COAX,8.0 L	80009	175-2409-00
W347	175-7597-00		CABLE ASSY,RF:50 OHM COAX,18.25 L	80009	175-7597-00
W348	175-2410-00		CABLE ASSY,RF:50 OHM COAX,10.0 L	80009	175-2410-00

Replaceable Electrical Parts  
492A/492AP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
W350	175-8962-00		CABLE ASSY,RF:50 OHM COAX,14.46 L,POLTHN JK T	80009	175-8962-00
W360	175-2409-00		CABLE ASSY,RF:50 OHM COAX,8.0 L	80009	175-2409-00
W361	175-7594-00		CABLE ASSY,RF:50 OHM COAX,3.25 L	80009	175-7594-00
W400	175-3748-05		CABLE ASSY,RF:50 OHM COAX,4.245 L (OPTION 31 ONLY)	80009	175-3748-05
W401	175-3635-02		CABLE ASSY,RF:50 OHM COAX,3.394 L (OPTION 31 ONLY)	80009	175-3635-02
W402	175-3751-05		CABLE ASSY,RF:50 OHM COAX,4.596 L (OPTION 31 ONLY)	80009	175-3751-05
W403	175-3631-02		CABLE ASSY,RF:50 OHM COAX,3.394 L (OPTION 31 ONLY)	80009	175-3631-02
W404	175-3750-05		CABLE ASSY,RF:50 OHM,4.051 L (OPTION 31 ONLY)	80009	175-3750-05
W405	175-3634-02		CABLE ASSY,RF:50 OHM COAX,3.394 L (OPTION 31 ONLY)	80009	175-3634-02
W406	175-3749-05		CABLE ASSY,RF:50 OHM,3.856 L (OPTION 31 ONLY)	80009	175-3749-05
W407	175-3633-02		CABLE ASSY,RF:50 OHM COAX,3.394 L (OPTION 31 ONLY)	80009	175-3633-02
W408	175-3747-05		CABLE ASSY,RF:50 OHM,COAX,4.599 L (OPTION 31 ONLY)	80009	175-3747-05
W409	175-9718-01		CABLE ASSY,RF:50 OHM COAX,17.235 L (OPTION 31 ONLY)	80009	175-9718-01
W502	175-2402-00		CABLE ASSY,RF:50 OHM COAX,12.0 L	80009	175-2402-00
W622	175-7788-00		CABLE ASSY,RF:50 OHM,COAX,8.25 L	80009	175-7788-00
W682	175-2418-00		CABLE ASSY,RF:50 OHM COAX,2.5 L	80009	175-2418-00
W684	175-2415-00		CABLE ASSY,RF:50 OHM COAX,7.0 L	80009	175-2415-00
W696	175-2416-00		CABLE ASSY,RF:50 OHM COAX 8.0 L,N-N	80009	175-2416-00
W700	175-9293-01		CABLE ASSY,RF:75 OHM COAX INPUT (OPTION 07 ONLY)	80009	175-9293-01
W701	175-9295-02		CABLE ASSY,RF:TRANS SW TO ATTEN (OPTION 07 ONLY)	80009	175-9295-02
W702	175-9296-01		CABLE ASSY,RF:50 OHM COAX RF INPUT (OPTION 07 ONLY)	80009	175-9296-01
W703	175-2412-00		CABLE ASSY,RF:50 OHM COAX,12.0 L (OPTION 07 ONLY)	80009	175-2412-00
W1025	175-2372-00		CABLE ASSY,RF:50 OHM COAX,3,26 AWG,5.0 L	TK1375	175-2372-00
W1037	198-4424-00		WIRE SET,ELEC:	80009	198-4424-00
W1038	<del>175-0863-00</del> 175-08738-00		CABLE,SP,ELEC:5,22 AWG,STRD,PVC JKT,RBN	TK0846	02CF2M7-BBT
W1044	175-7789-00		CABLE ASSY,RF:50 OHM COAX,15.25 L	80009	175-7789-00
W1060	175-7598-00		CABLE ASSY,RF:50 OHM COAX,13.25 L	80009	175-7598-00

# REPLACEABLE ELECTRICAL PARTS

## PARTS ORDERING INFORMATION

Replacement parts are available from or through your local Tektronix, Inc. Field Office or representative.

Changes to Tektronix instruments are sometimes made to accommodate improved components as they become available, and to give you the benefit of the latest circuit improvements developed in our engineering department. It is therefore important, when ordering parts, to include the following information in your order: Part number, instrument type or number, serial number, and modification number if applicable.

If a part you have ordered has been replaced with a new or improved part, your local Tektronix, Inc. Field Office or representative will contact you concerning any change in part number.

Change information, if any, is located at the rear of this manual.

### LIST OF ASSEMBLIES

A list of assemblies can be found at the beginning of the Electrical Parts List. The assemblies are listed in numerical order. When the complete component number of a part is known, this list will identify the assembly in which the part is located.

### CROSS INDEX-MFR. CODE NUMBER TO MANUFACTURER


The Mfr. Code Number to Manufacturer index for the Electrical Parts List is located immediately after this page. The Cross Index provides codes, names and addresses of manufacturers of components listed in the Electrical Parts List.

### ABBREVIATIONS


Abbreviations conform to American National Standard Y1.1.

### COMPONENT NUMBER (column one of the Electrical Parts List)

A numbering method has been used to identify assemblies, subassemblies and parts. Examples of this numbering method and typical expansions are illustrated by the following:



**Read: Resistor 1234 of Assembly 23**

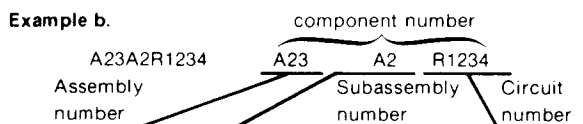

**Read: Resistor 1234 of Subassembly 2 of Assembly 23**

Only the circuit number will appear on the diagrams and circuit board illustrations. Each diagram and circuit board illustration is clearly marked with the assembly number. Assembly numbers are also marked on the mechanical exploded views located in the Mechanical Parts List. The component number is obtained by adding the assembly number prefix to the circuit number.

The Electrical Parts List is divided and arranged by assemblies in numerical sequence (e.g., assembly A1 with its subassemblies and parts, precedes assembly A2 with its subassemblies and parts).

Chassis-mounted parts have no assembly number prefix and are located at the end of the Electrical Parts List.

### TEKTRONIX PART NO. (column two of the Electrical Parts List)

Indicates part number to be used when ordering replacement part from Tektronix.

### SERIAL/MODEL NO. (columns three and four of the Electrical Parts List)

Column three (3) indicates the serial number at which the part was first used. Column four (4) indicates the serial number at which the part was removed. No serial number entered indicates part is good for all serial numbers.

### NAME & DESCRIPTION (column five of the Electrical Parts List)

In the Parts List, an Item Name is separated from the description by a colon (:). Because of space limitations, an Item Name may sometimes appear as incomplete. For further Item Name identification, the U.S. Federal Cataloging Handbook H6-1 can be utilized where possible.

### MFR. CODE (column six of the Electrical Parts List)

Indicates the code number of the actual manufacturer of the part. (Code to name and address cross reference can be found immediately after this page.)

### MFR. PART NUMBER (column seven of the Electrical Parts List)

Indicates actual manufacturers part number.

CROSS INDEX - MFR. CODE NUMBER TO MANUFACTURER

Mfr. Code	Manufacturer	Address	City, State, Zip Code
00213	NYTRONICS COMPONENTS GROUP INC SUBSIDIARY OF NYTRONICS INC	ORANGE ST	DARLINGTON SC 29532
00681	MINE SAFETY APPLIANCE CO CATALYST RESEARCH DIV	1421 CLARKVIEW RD	BALTIMORE MD 21209-2103
00779	AMP INC	2800 FULLING MILL PO BOX 3608	HARRISBURG PA 17105
00809	CROVEN CRYSTALS SUB OF ELECTRONIC TECHNOLOGIES INC	500 BEECH ST PO BOX 420	WHITBY ONT CAN L1N 5S5
00853	SANGAMO WESTON INC COMPONENTS DIV	SANGAMO RD PO BOX 128	PICKENS SC 29671-9716
01121	ALLEN-BRADLEY CO	1201 S 2ND ST	MILWAUKEE WI 53204-2410
01281	TRW ELECTRONICS AND DEFENSE SECTOR RF DEVICES	14520 AVIATION BLVD	LAWNDALE CA 90260-1121
01295	TEXAS INSTRUMENTS INC SEMICONDUCTOR GROUP	13500 N CENTRAL EXP PO BOX 655012	DALLAS TX 75265
02111	HAMILTON STANDARD CONTROLS INC SPECTROL DIV	17070 E GALE AVE P O BOX 1220	CITY OF INDUSTRY CA 91749
02114	AMPEREX ELECTRONIC CORP FERROXCUBE DIV	5083 KINGS HWY	SAUGERTIES NY 12477
02735	RCA CORP SOLID STATE DIVISION	ROUTE 202	SOMERVILLE NJ 08876
03508	GENERAL ELECTRIC CO SEMI-CONDUCTOR PRODUCTS DEPT	W GENESEE ST	AUBURN NY 13021
03888	PYROFILM DIV DIV OF KDI ELECTRONICS INC	60 S JEFFERSON RD	WHIPPANY NJ 07981-1001
04099	CAPCO INC	1328 WINTERS AVE PO BOX 1028	GRAND JUNCTION CO 81502
04222	AVX CERAMICS DIV OF AVX CORP	19TH AVE SOUTH P O BOX 867	MYRTLE BEACH SC 29577
04713	MOTOROLA INC SEMICONDUCTOR PRODUCTS SECTOR	5005 E MCDOWELL RD	PHOENIX AZ 85008-4229
05397	UNION CARBIDE CORP MATERIALS SYSTEMS DIV	11901 MADISON AVE	CLEVELAND OH 44101
05828	GENERAL INSTRUMENT CORP GOVERNMENT SYSTEMS DIV	600 W JOHN ST	HICKSVILLE NY 11802
06665	PRECISION MONOLITHICS INC SUB OF BOURNS INC	1500 SPACE PARK DR	SANTA CLARA CA 95050
07088	KELVIN ELECTRIC CO	5907 NOBLE AVE	VAN NUYS CA 91411
07263	FAIRCHILD SEMICONDUCTOR CORP NORTH AMERICAN SALES SUB OF SCHLUMBERGER LTD MS 118	10400 RIDGVIEW CT	CUPERTINO CA 95014
07716	TRW INC TRW IRC FIXED RESISTORS/BURLINGTON	2850 MT PLEASANT AVE	BURLINGTON IA 52601
11236	CTS CORP BERNE DIV THICK FILM PRODUCTS GROUP	406 PARR ROAD	BERNE IN 46711-9506
11532	TELEDYNE RELAYS TELEDYNE INDUSTRIES INC SUB OF TELEDYNE INC	12525 DAPHNE AVE	HAWTHORNE CA 90250-3308
12954	MICROSEMI CORP - SCOTTSDALE	8700 E THOMAS RD P O BOX 1390	SCOTTSDALE AZ 85252
12969	UNITRODE CORP	5 FORBES RD	LEXINGTON MA 02173-7305
14193	CAL-R INC	1601 OLYMPIC BLVD PO BOX 1397	SANTA MONICA CA 90406
14433	ITT SEMICONDUCTORS DIV		WEST PALM BEACH FL
14552	MICROSEMI CORP	2830 S FAIRVIEW ST	SANTA ANA CA 92704-5948
14674	CORNING GLASS WORKS	HOUGHTON PK	CORNING NY 14830
14752	ELECTRO CUBE INC	1710 S DEL MAR AVE	SAN GABRIEL CA 91776-3825
15238	ITT SEMICONDUCTORS A DIVISION OF INTERNATIONAL TELEPHONE AND TELEGRAPH CORP	500 BROADWAY PO BOX 168	LAWRENCE MA 01841-3002
15454	AMETEK INC RODAN DIV	721 N POPLAR ST	ORANGE CA 92668
15636	ELEC-TROL INC	26477 N GOLDEN VALLEY RD	SAUGUS CA 91350-2621



CROSS INDEX - MFR. CODE NUMBER TO MANUFACTURER

Mfr. Code	Manufacturer	Address	City, State, Zip Code
16179	M/A-COM OMNI SPECTRA INC MICROWAVE COMPONENT DIV SUB OF M/A-COM INC	21 CONTINENTAL BLVD	MERRIMACK NH 03054-4303
16299	AVX CORPORATION	3900 ELECTRONICS DR	RALEIGH NC 27604-1620
17540	ALPHA INDUSTRIES INC HQ/SEMICONDUCTOR DIV	20 SYLVAN RD PO BOX 1044	WOBURN MA 01801-1854
17856	SILICONIX INC	2201 LAURELWOOD RD	SANTA CLARA CA 95054-1516
18203	ENGELMANN MICROWAVE DIV DIV OF KDI ELECTRONICS INC	60 S JEFFERSON RD	WHIPPANY NJ 07981-1001
18324	SIGNETICS CORP MILITARY PRODUCTS DIV	4130 S MARKET COURT	SACRAMENTO CA 95834-1222
18612	VISHAY INTERTECHNOLOGY INC VISHAY RESISTOR PRODUCTS GROUP	63 LINCOLN HWY	MALVERN PA 19355-2120
19396	ILLINOIS TOOL WORKS INC PAKTRON DIV	1205 MCCONVILLE RD PO BOX 4539	LYNCHBURG VA 24502-4535
19701	MEPCO/CENTRALAB A NORTH AMERICAN PHILIPS CO MINERAL WELLS AIRPORT	PO BOX 760	MINERAL WELLS TX 76067-0760
20932	KYOCERA INTERNATIONAL INC	11620 SORRENTO VALLEY RD PO BOX 81543 PLANT NO 1	SAN DIEGO CA 92121
22526	DU PONT E I DE NEMOURS AND CO INC DU PONT CONNECTOR SYSTEMS DIV MILITARY PRODUCTS GROUP	515 FISHING CREEK RD	NEW CUMBERLAND PA 17070-3007
24022	TELEDYNE MICROWAVE TELEDYNE INC COMPANY	1290 TERRA BELLA AVE	MOUNTAIN VIEW CA 94043-1834
24226	GOWANDA ELECTRONICS CORP	NO 1 INDUSTRIAL PL	GOWANDA NY 14070-1409
24355	ANALOG DEVICES INC	RT 1 INDUSTRIAL PK PO BOX 9106	NORWOOD MA 02062
24539	AVANTEK INC	3175 BOWERS AVE	SANTA CLARA CA 95051
24546	CORNING GLASS WORKS	550 HIGH ST	BRADFORD PA 16701-3737
24931	SPECIALTY CONNECTOR CO INC	2100 EARLYWOOD DR PO BOX 547	FRANKLIN IN 46131
25088	SIEMENS CORP	186 WOOD AVE S	ISELIN NJ 08830-2704
25403	AMPEREX ELECTRONIC CORP SEMICONDUCTOR SOLID STATE AND ACTIVE DEVICES-ELECTRO OPTICAL DEVICES	GEORGE WASHINGTON HWY	SMITHFIELD RI 02917
26769	MEPCO/CENTRALAB A NORTH AMERICAN PHILIPS CO	5900 AUSTRALIAN AVE	WEST PALM BEACH FL 33407-2330
26805	M/A-COM OMNI SPECTRA INC MICROWAVE CONNECTOR DIV SUB OF M/A-COM INC	140 4TH AVE	WALTHAM MA 02154-7507
27012	MICRO DEVICES CORP SUB OF EMERSON ELECTRIC CO	1320 S MAIN ST PO BOX 3538	MANSFIELD OH 44907-2516
27014	NATIONAL SEMICONDUCTOR CORP	2900 SEMICONDUCTOR DR	SANTA CLARA CA 95051-0606
28480	HEWLETT-PACKARD CO CORPORATE HQ	3000 HANOVER ST	PALO ALTO CA 94304-1112
28733	CERAMIC MAGNETICS INC	87 FAIRFIELD RD	FAIRFIELD NJ 07006-4732
29454	JOHANSON DIELECTRICS INC	2210 SCREENLAND DR PO BOX 6465	BURBANK CA 91505-1137
29587	BUNKER RAMO CORP AMPHENOL INDUSTRIAL DIV	1830 S 54TH AVE	CHICAGO IL 60650
31781	EDAC INC	20 RAILSIDE RD	DON MILLS ONT CAN M3A 1A4
32293	INTERSIL INC SUB OF GENERAL ELECTRIC CO	10600 RIDGEVIEW COURT	CUPERTINO CA 95014-0704
32997	BOURNS INC TRIMPOT DIV	1200 COLUMBIA AVE	RIVERSIDE CA 92507-2114
33095	SPECTRUM CONTROL INC	2185 W WEIGHT ST	ERIE PA 16505
33096	COLORADO CRYSTAL CORP	2303 W 8TH ST	LOVELAND CO 80537-5268
34335	ADVANCED MICRO DEVICES	901 THOMPSON PL	SUNNYVALE CA 94086-4518
34630	K AND L/QUARTZTEK INC	3940 W MONTECITO	PHOENIX AZ 85019
34649	INTEL CORP SALES OFFICE /ST4-2/	3065 BOWERS AVE	SANTA CLARA CA 95051
44655	OHMITE MFG CO	3601 W HOWARD ST	SKOKIE IL 60076-4014
50101	FREQUENCY SOURCES INC SEMICONDUCTOR DIV SUB OF LORAL CORP	16 MAPLE RD	CHELMSFORD MA 01824-3737

CROSS INDEX - MFR. CODE NUMBER TO MANUFACTURER

Mfr. Code	Manufacturer	Address	City, State, Zip Code
50140	K AND L MICROWAVE INC SUB OF DOVER CORP	408 COLES CIR	SALISBURY MD 21801-3214
50434	HEWLETT-PACKARD CO OPTOELECTRONICS DIV	370 W TRIMBLE RD	SAN JOSE CA 95131
50438	HEWLETT-PACKARD CO DATA SYSTEMS DIV	11000 WOLFE RD	CUPERTINO CA 95014-0602
50558	ELECTRONIC CONCEPTS INC	526 INDUSTRIAL WAY W	EATONTOWN NJ 07724-2212
50667	DYNATECH MICROWAVE TECHNOLOGY INC DYNATECH MICROWAVE SWITCHES DIV	26655 W AGOURA RD	CLABASAS CA 91302-1921
51640	ANALOG DEVICES INC MICROELECTRONICS DIV	829 WOBURN ST	WILMINGTON MA 01887-3414
51642	CENTRE ENGINEERING INC	2820 E COLLEGE AVE	STATE COLLEGE PA 16801-7515
52648	PLESSEY TRADING CORP PLESSEY OPTOELECTRONICS AND MICROWAVE	1641 KAISER AVE	IRVINE CA 92714-5703
52763	STETCO INC	3344 SCHIERHORN	FRANKLIN PARK IL 60131
52769	SPRAGUE-GOODMAN ELECTRONICS INC	134 FULTON AVE	GARDEN CITY PARK NY 11040-5352
54473	MATSUSHITA ELECTRIC CORP OF AMERICA	ONE PANASONIC WAY PO BOX 1501	SECAUCUS NJ 07094-2917
54583	TDK ELECTRONICS CORP	12 HARBOR PARK DR	PORT WASHINGTON NY 11550
55112	WESTLAKE CAPACITORS INC	5334 STERLING CENTER DRIVE	WESTLAKE VILLAGE CA 91361
55680	NICHICON /AMERICA/ CORP	927 E STATE PKY	SCHAUMBURG IL 60195-4526
56289	SPRAGUE ELECTRIC CO WORLD HEADQUARTERS	92 HAYDEN AVE	LEXINGTON MA 02173-7929
57668	ROHM CORP	8 WHATNEY PO BOX 19515	IRVINE CA 92713
58361	QUALITY TECHNOLOGIES CORP	3400 HILLVIEW AVE	PALO ALTO CA 94304-1319
58854	GTE PRODUCTS CORP LIGHTING PRODUCTS GROUP	60 BOSTON ST	SALEM MA 01970-2147
59492	K AND L QUARTZTEK DIV OF K AND L MICROWAVE INC SUB OF DOVER CORP	20 S 48TH AVE	PHOENIX AZ 85043-3820
59660	TUSONIX INC	7741 N BUSINESS PARK DR PO BOX 37144	TUCSON AZ 85740-7144
59821	MEPCO/CENTRALAB A NORTH AMERICAN PHILIPS CO	7158 MERCHANT AVE	EL PASO TX 79915-1207
71400	BUSSMANN DIV OF COOPER INDUSTRIES INC	114 OLD STATE RD PO BOX 14460	ST LOUIS MO 63178
71468	ITT CANNON DIV OF ITT CORP	666 E DYER RD	SANTA ANA CA 92702
72619	DIALIGHT CORP BROOKLYN DIV	203 HARRISON PL	BROOKLYN NY 11237-1587
72982	ERIE SPECIALTY PRODUCTS INC	645 W 11TH ST	ERIE PA 16512
73138	BECKMAN INDUSTRIAL CORP BECKMAN ELECTRONIC TECHNOLOGIES SUB OF EMERSON ELECTRIC	4141 PALM ST	FULLERTON CA 92635
73899	JFD ELECTRONICS COMPONENTS CORP A DIV OF MURTA ERIE NORTH AMERICA	112 MOTT ST	OCEANSIDE NY 11572-5823
74970	JOHNSON E F CO	299 10TH AVE S W	WASECA MN 56093-2539
75378	CTS KNIGHTS INC	400 REIMANN AVE	SANDWICH IL 60548-1846
75915	LITTELFUSE INC SUB TRACOR INC	300 E NORTHWEST HWY	DES PLAINES IL 60016-3049
76493	BELL INDUSTRIES INC JW MILLER DIV	19070 REYES AVE PO BOX 5825	COMPTON CA 90224-5825
80009	TEKTRONIX INC	14150 SW KARL BRAUN DR PO BOX 500	BEAVERTON OR 97077-0001
81073	GRAYHILL INC	561 HILLGROVE AVE PO BOX 10373	LA GRANGE IL 60525-5914
84411	AMERICAN SHIZUKI CORP OGALLALA OPERATIONS	301 WEST O ST	OGALLALA NE 69153-1844
90201	AEROVOX MALLORY	101 MALLORY DR	GLASGOW KY 42141
91506	AUGAT INC	33 PERRY AVE P O BOX 779	ATTLEBORO MA 02703-2417
91637	DALE ELECTRONICS INC	2064 12TH AVE PO BOX 609	COLUMBUS NE 68601-3632
95275	VITRAMON INC	BOX 544	BRIDGEPORT CT 06601-0544

CROSS INDEX - MFR. CODE NUMBER TO MANUFACTURER

Mfr. Code	Manufacturer	Address	City, State, Zip Code
96733	SFE TECHNOLOGIES	1501 FIRST ST	SAN FERNANDO CA 91340-2707
98291	SEAELECTRO CORP	40 LINDEMAN DR	TURNBULL CT 06611-4739
	BICC ELECTRONICS		
98821	NORTH HILLS ELECTRONICS INC	ALXNDR PL	GLEN COVE NY 11542-3704
S0545	NIPPON ELECTRIC CO LTD		TOKYO JAPAN
TK0146	BUEHLER PRODUCTS INC	PO BOX A HIGHWAY 70	EAST KINSTON NC 28501
TK0213	TOPTRON CORP		TOKYO JAPAN
TK0272	F W CAPACITORS INC	P O BOX 12636	FLORENCE SC 29504
TK0515	ERICSSON COMPONENTS INC	403 INTERNATIONAL PKY PO BOX 853904	RICHARDSON TX 75085-3904
TK0679	DILECTRON INC	2669 S MRYTLE AVE	MONROVIA CA 91016
TK0900	UNITED CHEMI-CON INC	9801 W HIGGINS SUITE 430	ROSEMONT IL 60018-4704
TK0935	MARQUARDT SWITCHES INC	67 ALBANY ST PO BOX 465	CAZENOVIA NY 13035-1219
TK0961	NEC ELECTRONICS USA INC	401 ELLIS ST PO BOX 7241	MOUNTAIN VIEW CA 94039
TK1345	ZMAN AND ASSOCIATES	7633 S 180TH	KENT WA 98032
TK1360	DALE ELECTRONICS INC	462 LIONEL DR	EL PASO TX 79935
TK1375	ESAM	PO BOX 376	GRANTS PASS OR 97526
TK1421	COILTRON	PO BOX 904	BEAVERTON OR 97075
TK1424	MARCON AMERICA CORP	3 PEARL CT	ALLENDALE NJ 07401
TK1727	PHILIPS NEDERLAND BV	POSTBUS 90050	5600 PB EINDHOVEN THE NETHERLANDS
	AFD ELONCO		

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
AT10	119-1007-07		ATTENUATOR,VAR:0-60DB IN 10DB STEPS	50667	ORDER BY DESC
AT11	015-1053-01		ATTENUATOR,FXD:3DB PAD	16179	2082-4287-03
AT12	015-1053-01		ATTENUATOR,FXD:3DB PAD	16179	2082-4287-03
A10	119-1061-01		LIMITER ASSY:2GHZ	80009	119-1061-01
A11	119-1164-00		BIAS RETURN:	80009	119-1164-00
A12	119-1017-01		FIRST CONV ASSY:	80009	119-1017-01
A12A1	155-0189-02		MICROCKT,LINEAR:DUAL DIODE W/HOUSING	80009	155-0189-02
A13	119-1019-00		POWER DIV ASSY:	80009	119-1019-00
A14	119-1645-01		DIPLEXER ASSY:	80009	119-1645-01
A16	119-0752-02		OSCILLATOR,RF:2.0 TO 6.1 GHZ W/CAN	80009	119-0752-02
A16A1	670-5540-00		CIRCUIT BD ASSY:1ST L O INTERFACE	80009	670-5540-00
A17	015-1053-01		ATTENUATOR,FXD:3DB PAD	16179	2082-4287-03
A18	119-1096-02		SEC CONV ASSY:	80009	119-1096-02
A18A1	-----		CKT BOARD ASSY:2ND CONVERTER (PART OF A18)		
A19	119-1845-03		110MHZ IF ASSY: (OPTION 42 ONLY)	80009	119-1845-03
A19A1	670-8650-03		CIRCUIT BD ASSY:110MHZ IF OUT (OPTION 42 ONLY)	80009	670-8650-03
A22	650-0736-02		PHASE LOCK ASSY:	80009	650-0736-02
A22A1	670-7914-00		CIRCUIT BD ASSY:16-20MHZ PHASELOCK	80009	670-7914-00
A22A2	-----		(PART OF A22)		
A22A2A1	670-7395-01		CIRCUIT BD ASSY:2182MHZ MICRO STRIP OSC	80009	670-7395-01
A22A2A2	670-7076-01		CIRCUIT BD ASSY:2200MHZ REF	80009	670-7076-01
A22A2A3	670-7079-00		CIRCUIT BD ASSY:2200MHZ REFERENCE MIXER	80009	670-7079-00
A23	119-1131-05		SEC CONN ASSY:829MHZ	80009	119-1131-05
A23A1	670-5936-00		CIRCUIT BD ASSY:719MHZ SECOND LO	80009	670-5936-00
A23A2	670-5937-03		CIRCUIT BD ASSY:25MHZ PHASE LOCK	80009	670-5937-03
A23A3	670-6016-00		CIRCUIT BD ASSY:829MHZ HARMONIC MIXER	80009	670-6016-00
A23A4	670-6256-03		CIRCUIT BD ASSY:829MHZ DIPLEXER	80009	670-6256-03
A23A5	670-6255-01		CIRCUIT BD ASSY:829MHZ AMPL	80009	670-6255-01
A23A6	670-6015-01		CIRCUIT BD ASSY:110MHZ IF SELECT	80009	670-6015-01
A23A7	670-6224-00		CIRCUIT BD ASSY:829MHZ,SECOND CONVERTER	80009	670-6224-00
A24	119-1010-02		HYBRID CKT ASSY:PHASE GATE DETECTOR	80009	119-1010-02
A24A1	670-5957-01		CIRCUIT BD ASSY:PHASE GATE INPUT	80009	670-5957-01
A25	119-1640-01		HARMONIC MIXER:	80009	119-1640-01
A25A3	670-4376-01		CIRCUIT BD ASSY:HARMONIC MIXER INPUT	80009	670-4376-01
A26	672-0160-00		CIRCUIT BD ASSY:AUX SYNTHESIZER	80009	672-0160-00
A26A1	670-9163-00		CIRCUIT BD ASSY:AUX SYNTH	80009	670-9163-00
A28	670-7920-01		CIRCUIT BD ASSY:MAIN MOTHER	80009	670-7920-01
A30	621-0023-00		POWER SUPPLY: (492B ONLY)	80009	621-0023-00
A30	621-0024-00		POWER SUPPLY: (492BP ONLY)	80009	621-0024-00
A30	621-0030-00		POWER SUPPLY: (492B OPTION 42 ONLY)	80009	621-0030-00
A30	621-0031-00		POWER SUPPLY: (492BP OPTION 42 ONLY)	80009	621-0031-00
A30A1	670-8036-04		CIRCUIT BD ASSY:PWR SPLY	80009	670-8036-04
A30A2	670-7226-00		CIRCUIT BD ASSY:FAN DRIVE	80009	670-7226-00
A30A57	670-9841-00		CIRCUIT BD ASSY:GP1B INTERFACE (492B ONLY)	80009	670-9841-00
A30A57	670-9806-00		CIRCUIT BD ASSY:GP1B INTERFACE (492BP ONLY)	80009	670-9806-00
A30A76	670-5558-02		CIRCUIT BD ASSY:RELAY DRIVER	80009	670-5558-02
A32	119-1015-01		FILTER AMPL:110MHZ	80009	119-1015-01
A32A1	-----		CKT BOARD ASSY:110 IF (PART OF A32)		
A34	119-1579-01		OSC/MIXER ASSY:3RD CONVERTER	80009	119-1579-01

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Dscont			
A34A1	-----			CKT BOARD ASSY:3RD CONVERTER (PART OF A34)		
A34A2	-----			CIRCUIT BD ASSY:100MHZ OSC REGULATOR (PART OF A34)		
A34A3	119-1905-01			RELAY ASSEMBLY: (OPTION 07 ONLY)	80009	119-1905-01
A34A3A1	670-8491-01			CIRCUIT BD ASSY:RELAY (OPTION 07 ONLY)	80009	670-8491-01
A36	119-2429-00			PH LOCK 3RD LO:	80009	119-2429-00
A36A1	670-9795-00			CIRCUIT BD ASSY:REF LOCK	80009	670-9795-00
A36A2	670-9796-00			CIRCUIT BD ASSY:REFERENCE LOCK REGULATOR	80009	670-9796-00
A38	670-7947-03			CIRCUIT BD ASSY:FRONT PNL	80009	670-7947-03
A40	670-8389-01			CIRCUIT BD ASSY:VIDEO PROCESSOR	80009	670-8389-01
A42	672-0166-01			CIRCUIT BD ASSY:PRESELECTOR DRIVER	80009	672-0166-01
A42A1	670-5552-05			CIRCUIT BD ASSY:PRESELECTOR DRIVER	80009	670-5552-05
A44	672-0158-00			CIRCUIT BD ASSY:1ST LO DRIVER	80009	672-0158-00
A44A1	670-9051-00			CIRCUIT BD ASSY:1ST LO DRIVER	80009	670-9051-00
A46	672-0165-00			CIRCUIT BD ASSY:CENTER FREQ CONTROL	80009	672-0165-00
A46A1	670-9094-01			CIRCUIT BD ASSY:CENTER FREQ CONT	80009	670-9094-01
A48	672-0157-00			CIRCUIT BD ASSY:SPAN ATTENUATOR	80009	672-0157-00
A48A1	670-5550-01			CIRCUIT BD ASSY:SPAN ATTENUATOR	80009	670-5550-01
A50	119-1992-02	B010100	B010129	PHASE LOCK ASSY:	80009	119-1992-02
A50	119-1992-03	B010130		PHASE LOCK ASSY:	80009	119-1992-03
A50A1	670-5519-01			CIRCUIT BD ASSY:SYNTHESIZER	80009	670-5519-01
A50A2	670-9068-00			CIRCUIT BD ASSY:STROBE DRIVER	80009	670-9068-00
A50A3	670-5522-02			CIRCUIT BD ASSY:OFFSET MIXER	80009	670-5522-02
A50A4	670-7921-03			CIRCUIT BD ASSY:ERROR AMPL	80009	670-7921-03
A50A5	670-5524-02	B010100	B010129	CIRCUIT BD ASSY:CONTROLLED OSC	80009	670-5524-02
A50A5	670-5524-03	B010130		CIRCUIT BD ASSY:CONTROLLED OSC	80009	670-5524-03
A51	672-0164-00			CIRCUIT BD ASSY:COUNTER	80009	672-0164-00
A51A1	670-7899-01			CIRCUIT BD ASSY:COUNTER	80009	670-7899-01
A54	670-9680-03			CIRCUIT BD ASSY:MEMORY	80009	670-9680-03
A54	670-9950-03			CIRCUIT BD ASSY:MEMORY (OPTION 39 ONLY)	80009	670-9950-03
A54	671-0029-00	B010100	B010134	CIRCUIT BD ASSY:MEMORY	80009	671-0029-00
A54	671-0029-01	B010135		CIRCUIT BD ASSY:MEMORY (OPTION 45 ONLY)	80009	671-0029-01
A56	670-9770-03			CIRCUIT BD ASSY:GPIB	80009	670-9770-03
A56	671-0030-00	B010100	B010134	CIRCUIT BD ASSY:GPIB	80009	671-0030-00
A56	671-0030-01	B010135		CIRCUIT BD ASSY:GPIB (OPTION 45 ONLY)	80009	671-0030-01
A58	670-8882-00			CIRCUIT BD ASSY:PROCESSOR	80009	670-8882-00
A60	670-9100-02			CIRCUIT BD ASSY:DIGITAL STORAGE INTERFACE	80009	670-9100-02
A61	672-0163-01	B010100	B010129	CIRCUIT BD ASSY:VERTICAL DIGITAL STORAGE	80009	672-0163-01
A61	672-0163-02	B010130		CIRCUIT BD ASSY:VERTICAL DIGITAL STORAGE	80009	672-0163-02
A61A1	670-9099-01	B010100	B010129	CIRCUIT BD ASSY:DIGITAL STORAGE	80009	670-9099-01
A61A1	670-9099-02	B010130		CIRCUIT BD ASSY:DIGITAL STORAGE INTERFACE	80009	670-9099-02
A62	672-0187-01			CIRCUIT BD ASSY:LOG AMP	80009	672-0187-01
A62A1	670-9091-02			CIRCUIT BD ASSY:LOG AMP	80009	670-9091-02
A64	672-0162-04			CIRCUIT BD ASSY:DEFLECTION AMP	80009	672-0162-04
A64	672-1300-00	B010130		CIRCUIT BD ASSY:DEFLECTION AMP (OPTION 43 ONLY)	80009	672-1300-00
A64A1	671-0372-01			CIRCUIT BD ASSY:DEFLECTION AMP	80009	671-0372-01
A64A1	671-0803-00	B010130		CIRCUIT BD ASSY:DEFLECTION AMP (OPTION 43 ONLY)	80009	671-0803-00
A66	672-0159-00			CIRCUIT BD ASSY:CRT READOUT	80009	672-0159-00
A66A1	670-7902-00			CIRCUIT BD ASSY:CRT READOUT	80009	670-7902-00
A68	644-0645-03			VAR RESOLN MDL:495/P	80009	644-0645-03
A68	644-0675-02			VAR RESOLN MDL:494/AP (OPTION 07 ONLY)	80009	644-0675-02

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A68A1	670-5528-03		CIRCUIT BD ASSY:#1VR MOTHER	80009	670-5528-03
A68A2	670-5536-05		CIRCUIT BD ASSY:#2 V.R. MOTHER	80009	670-5536-05
A68A3	670-9843-00		CIRCUIT BD ASSY:VR INPUT	80009	670-9843-00
A68A4	670-9531-00		CIRCUIT BD ASSY:1ST FILTER SELECT	80009	670-9531-00
A68A4	670-9951-00		CIRCUIT BD ASSY:1ST FILTER SELECT (OPTION 07 ONLY)	80009	670-9951-00
A68A5	670-8321-00		CIRCUIT BD ASSY:10DB GAIN STEPS	80009	670-8321-00
A68A6	670-5532-04		CIRCUIT BD ASSY:20DB GAIN STEPS	80009	670-5532-04
A68A7	670-5533-03		CIRCUIT BD ASSY:BAND LEVELING	80009	670-5533-03
A68A8	671-0094-01		CIRCUIT BD ASSY:2ND FILTER SELECT	80009	671-0094-01
A68A8	670-9598-01		CIRCUIT BD ASSY:2ND FILTER SELECT (OPTION 07 ONLY)	80009	670-9598-01
A68A9	670-9778-00		CIRCUIT BD ASSY:POST VR AMPLIFIER	80009	670-9778-00
A70	670-9932-01		CIRCUIT BD ASSY:Z-AXIS	80009	670-9932-01
A72	670-9090-04		CIRCUIT BD ASSY:SWEEP	80009	670-9090-04
A74	670-5559-07		CIRCUIT BD ASSY:HIGH VOLTAGE	80009	670-5559-07
A74A1	-----		(PART OF A74)		
A77	670-5746-01		CIRCUIT BD ASSY:CRT GRATICULE LIGHT	80009	670-5746-01
AT10	119-1007-07		ATTENUATOR,VAR:0-60DB IN 10DB STEPS	50667	ORDER BY DESC
AT11	015-1053-00		ATTENUATOR,FXD:3DB	26805	2082-4182-03
AT10	119-1007-07		ATTENUATOR,VAR:0-60DB IN 10DB STEPS	50667	ORDER BY DESC
AT11	015-1053-01		ATTENUATOR,FXD:3DB PAD	16179	2082-4287-03
AT12	015-1053-01		ATTENUATOR,FXD:3DB PAD	16179	2082-4287-03
A10	119-1061-01		LIMITER ASSY:2GHZ	80009	119-1061-01
A11	119-1164-00		BIAS RETURN:	80009	119-1164-00
A12	119-1017-01		FIRST CONV ASSY:	80009	119-1017-01
A12A1	155-0189-02		MICROCKT,LINER: DUAL DIODE W/HOUSING	80009	155-0189-02
A13	119-1019-00		POWER DIV ASSY:	80009	119-1019-00
A14	119-1645-01		DIPLEXER ASSY:	80009	119-1645-01
A16	119-0752-02		OSCILLATOR,RF:2.0 TO 6.1 GHZ W/CAN	80009	119-0752-02
A16C1013	290-0778-00		CAP,FXD,ELCTLT:1UF,20%,50V,NPLZD	54473	ECE-A50N1
A16A1	670-5540-00		CIRCUIT BD ASSY:1ST L O INTERFACE	80009	670-5540-00
A16A1C1012	290-0326-02		CAP,FXD,ELCTLT:820UF,10%,6V	56289	109D827X9006F2
A16A1C1014	290-0326-02		CAP,FXD,ELCTLT:820UF,10%,6V	56289	109D827X9006F2
A16A1C1016	290-0529-00		CAP,FXD,ELCTLT:47UF,20%,20V	05397	T362C476M020AS
A16A1K1015	148-0076-00		RLY,REED:FRM A,250MA,100V,COIL,5V,500 OHM	15636	R4060-1
A16A1L1011	108-0205-00		COIL,RF:FIXED,1MH	76493	8209
A16A1VR1010	152-0590-00		SEMICON DVC,DI:ZEN,SI,18V,5%,400MW	80009	152-0590-00
A16A1VR1018	152-0304-00		SEMICON DVC,DI:ZEN,SI,20V,5%,0.4W,DO-7	15238	Z5411
A16A1VR1019	152-0304-00		SEMICON DVC,DI:ZEN,SI,20V,5%,0.4W,DO-7	15238	Z5411
A17	015-1053-01		ATTENUATOR,FXD:3DB PAD	16179	2082-4287-03
A18	119-1096-02		SEC CONV ASSY:	80009	119-1096-02
A18W140	175-2199-02		CABLE ASSY,RF:50 OHM COAX,13.04 L	80009	175-2199-02
A18W222	175-3849-01		CABLE ASSY,RF:50 OHM COAX,4.85 L	80009	175-3849-01
A18A1	-----		CKT BOARD ASSY:2ND CONVERTER (PART OF A18)		
A18A1U1014	156-0158-04		MICROCKT,LINER: DUAL OPNL AMPL	01295	MC1458JG
A19	119-1845-03		110MHZ IF ASSY: (OPTION 42 ONLY)	80009	119-1845-03
A19C190	281-0825-00		CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A19A1	670-8650-03		CIRCUIT BD ASSY:110MHZ IF OUT (OPTION 42 ONLY)	80009	670-8650-03
A19A1C10	283-5008-00		CAP,FXD,CER DI:12PF,5%,50V	54583	C3216COG1H120J
A19A1C12	283-5009-00		CAP,FXD,CER DI:15PF,5%,50V	54583	C3216COG1H150J
A19A1C14	281-0267-00		CAP,VAR,PLASTIC:6-50PF,50V	80009	281-0267-00
A19A1C16	283-5005-00		CAP,FXD,CER DI:4PF,+/- 0.25PF,50V	54583	C3216COG1H040C
A19A1C18	283-5009-00		CAP,FXD,CER DI:15PF,5%,50V	54583	C3216COG1H150J

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A19A1C20	281-0267-00		CAP,VAR,PLASTIC:6-50PF,50V	80009	281-0267-00
A19A1C22	283-5006-00		CAP,FXD,CER DI:5PF,+/- 0.25PF,50V	54583	C3216COG1H050C
A19A1C24	283-5009-00		CAP,FXD,CER DI:15PF,5%,50V	54583	C3216COG1H150J
A19A1C26	281-0267-00		CAP,VAR,PLASTIC:6-50PF,50V	80009	281-0267-00
A19A1C28	283-5007-00		CAP,FXD,CER DI:8PF,+/- 0.5PF,50V	80009	283-5007-00
A19A1L10	108-0606-00		COIL,RF:FIXED,31NH	80009	108-0606-00
A19A1L11	108-0262-00		COIL,RF:FIXED,505NH	80009	108-0262-00
A19A1L12	108-0606-00		COIL,RF:FIXED,31NH	80009	108-0606-00
A19A1L14	108-0606-00		COIL,RF:FIXED,31NH	80009	108-0606-00
A19A1R10	321-5043-00		RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A19A1R12	321-5046-00		RES,FXD,FILM:82.5 OHM,1%,0.125W	01121	BCK82R5FT
A19A1R14	321-5046-00		RES,FXD,FILM:82.5 OHM,1%,0.125W	01121	BCK82R5FT
A19A1R16	321-5046-00		RES,FXD,FILM:82.5 OHM,1%,0.125W	01121	BCK82R5FT
A19A1R18	315-0391-00		RES,FXD,FILM:390 OHM,5%,0.25W	57668	NTR25J-E390E
A19A1T10	120-1567-00		XFMR,COUPLER:BALUN	TK1421	ORDER BY DESC
A19A1T11	120-1760-00		TRANSFORMER,RF:BIFILAR,2 TURN	80009	120-1760-00
A19A1T12	120-1567-00		XFMR,COUPLER:BALUN	TK1421	ORDER BY DESC
A19A1T13	120-1760-00		TRANSFORMER,RF:BIFILAR,2 TURN	80009	120-1760-00
A19A1T15	120-1760-00		TRANSFORMER,RF:BIFILAR,2 TURN	80009	120-1760-00
A19A1U10	156-2247-00		MICROCKT,LINEAR:GENERAL PURPOSE AMP MODULE	24539	GPD-1003A
A19A1U12	156-2208-00		MICROCKT,LINEAR:4 PIN HEADER AMPL	24539	GPD-252A
A19A1U14	156-2208-00		MICROCKT,LINEAR:4 PIN HEADER AMPL	24539	GPD-252A
A22	650-0736-02		PHASE LOCK ASSY:	80009	650-0736-02
A22C220	281-0720-00		CAP,FXD,CER DI:1750PF,+80-20%,250V	33095	51-707-002
A22C221	281-0720-00		CAP,FXD,CER DI:1750PF,+80-20%,250V	33095	51-707-002
A22C222	281-0720-00		CAP,FXD,CER DI:1750PF,+80-20%,250V	33095	51-707-002
A22C223	281-0720-00		CAP,FXD,CER DI:1750PF,+80-20%,250V	33095	51-707-002
A22C224	281-0720-00		CAP,FXD,CER DI:1750PF,+80-20%,250V	33095	51-707-002
A22C226	281-0720-00		CAP,FXD,CER DI:1750PF,+80-20%,250V	33095	51-707-002
A22C227	281-0720-00		CAP,FXD,CER DI:1750PF,+80-20%,250V	33095	51-707-002
A22L1060	108-0182-00		COIL,RF:FIXED,293NH	80009	108-0182-00
A22R224	321-0189-00		RES,FXD,FILM:909 OHM,1%,0.125W,TC=TO	19701	5033ED909ROF
A22W1048	175-8791-00		CA ASSY,SP,ELEC:8.26 AWG,7.5 L,RIBBON	TK1375	175-8791-00
A22A1	670-7914-00		CIRCUIT BD ASSY:16-20MHZ PHASELOCK	80009	670-7914-00
A22A1C1012	290-0517-00		CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ
A22A1C1017	283-0201-00		CAP,FXD,CER DI:27PF,10%,200V	04222	SR152C270KAA
A22A1C1019	290-0517-00		CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ
A22A1C1026	283-0051-00		CAP,FXD,CER DI:0.0033UF,5%,100V	04222	SR301A332JAA
A22A1C1027	290-0517-00		CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ
A22A1C1028	283-0108-00		CAP,FXD,CER DI:220PF,10%,200V	04222	SR152A221KAA
A22A1C1029	283-0051-00		CAP,FXD,CER DI:0.0033UF,5%,100V	04222	SR301A332JAA
A22A1C1031	283-0108-00		CAP,FXD,CER DI:220PF,10%,200V	04222	SR152A221KAA
A22A1C1033	290-0517-00		CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ
A22A1C1034	290-0517-00		CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ
A22A1C1038	283-0339-00		CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA
A22A1C1044	283-0339-00		CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA
A22A1C1046	283-0108-00		CAP,FXD,CER DI:220PF,10%,200V	04222	SR152A221KAA
A22A1C1047	283-0339-00		CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA
A22A1C1073	290-0517-00		CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ
A22A1C1079	290-0517-00		CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ
A22A1C1086	283-0339-00		CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA
A22A1C1087	283-0339-00		CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA
A22A1C1088	283-0339-00		CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA
A22A1C2011	290-0517-00		CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ
A22A1C2012	283-0339-00		CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA
A22A1C2015	290-0512-00		CAP,FXD,ELCTLT:22UF,20%,15V	05397	T368B226M015AS
A22A1C2016	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A22A1C2019	290-0517-00		CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A22A1C2026	283-0239-00		CAP,FXD,CER DI:0.022UF,10%,50V	04222	3439-050C-223K
A22A1C2030	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A22A1C2040	283-0330-00		CAP,FXD,CER DI:100PF,5%,50V	05397	C320C101J5R5CA
A22A1C2041	283-0239-00		CAP,FXD,CER DI:0.022UF,10%,50V	04222	3439-050C-223K
A22A1C2043	283-0330-00		CAP,FXD,CER DI:100PF,5%,50V	05397	C320C101J5R5CA
A22A1C2046	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A22A1C2077	290-0517-00		CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ
A22A1C2081	290-0517-00		CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ
A22A1C2085	283-0107-00		CAP,FXD,CER DI:51PF,5%,200V	04222	SR206A510JAA
A22A1C2090	283-0175-00		CAP,FXD,CER DI:10PF,5%,200V	05397	C312C100D2G5CA 8
A22A1C2091	283-0197-00		CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A22A1C2092	283-0339-00		CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA
A22A1CR1019	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A22A1CR1086	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A22A1CR1087	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A22A1CR1088	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A22A1CR1089	152-0719-00		SEMICON DVC,DI:VVC,SI,100 PF,5%,30V,DO-7	04713	SMV1501
A22A1CR2012	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A22A1CR2014	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A22A1CR2015	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A22A1CR2019	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A22A1CR2048	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A22A1CR2084	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A22A1L1012	120-0407-00		XFMR,TOROID:	80009	120-0407-00
A22A1L1022	108-0440-00		COIL,RF:FIXED,8UH	80009	108-0440-00
A22A1L1097	108-0440-00		COIL,RF:FIXED,8UH	80009	108-0440-00
A22A1L2027	120-0407-00		XFMR,TOROID:	80009	120-0407-00
A22A1L2038	120-0407-00		XFMR,TOROID:	80009	120-0407-00
A22A1Q1012	151-0103-00		TRANSISTOR:NPN,SI,TO-5	80009	151-0103-00
A22A1Q1023	151-0103-00		TRANSISTOR:NPN,SI,TO-5	80009	151-0103-00
A22A1Q1041	151-0441-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF501
A22A1Q1042	151-0441-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF501
A22A1Q1043	151-0441-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF501
A22A1Q1047	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A22A1Q2024	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A22A1Q2076	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A22A1Q2084	151-1022-00		TRANSISTOR:FET,N-CHAN,SI,TO-18	80009	151-1022-00
A22A1Q2087	151-0441-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF501
A22A1Q2096	151-0441-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF501
A22A1R1010	315-0750-00		RES,FXD,FILM:75 OHM,5%,0.25W	57668	NTR25J-E75E0
A22A1R1011	315-0471-00		RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A22A1R1013	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A22A1R1014	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A22A1R1015	321-0297-00		RES,FXD,FILM:12.1K OHM,1%,0.125W,TC=TO	07716	CEAD12101F
A22A1R1016	321-0262-00		RES,FXD,FILM:5.23K OHM,1%,0.125W,TC=TO	19701	5033ED5K230F
A22A1R1018	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A22A1R1019	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E470E
A22A1R1023	315-0200-00		RES,FXD,FILM:20 OHM,5%,0.25W	19701	5043CX20R00J
A22A1R1024	315-0390-00		RES,FXD,FILM:39 OHM,5%,0.25W	57668	NTR25J-E39E0
A22A1R1025	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A22A1R1026	315-0302-00		RES,FXD,FILM:3K OHM,5%,0.25W	57668	NTR25J-E03K0
A22A1R1027	315-0302-00		RES,FXD,FILM:3K OHM,5%,0.25W	57668	NTR25J-E03K0
A22A1R1028	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A22A1R1029	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A22A1R1031	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A22A1R1033	321-0821-00		RES,FXD,FILM:2.12K OHM,1%,0.125W,TC=TO	19701	5033RD2K120F
A22A1R1034	321-0217-00		RES,FXD,FILM:1.78K OHM,1%,0.125W,TC=TO	19701	5043DK780F
A22A1R1035	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E



Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A22A1R1037	317-0200-00		RES,FXD,CMPSN:20 OHM,5%,0.125W	01121	8B2005
A22A1R1038	317-0161-00		RES,FXD,CMPSN:160 OHM,5%,0.125W	01121	8B1615
A22A1R1039	317-0161-00		RES,FXD,CMPSN:160 OHM,5%,0.125W	01121	8B1615
A22A1R1040	317-0511-00		RES,FXD,CMPSN:510 OHM,5%,0.125W	01121	8B5115
A22A1R1042	317-0391-00		RES,FXD,CMPSN:390 OHM,5%,0.125W	01121	8B3915
A22A1R1043	317-0111-00		RES,FXD,CMPSN:110 OHM,5%,0.125W	01121	8B1115
A22A1R1046	317-0820-00		RES,FXD,CMPSN:82 OHM,5%,0.125W	01121	8B8205
A22A1R1048	317-0680-00		RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	8B6805
A22A1R1051	321-0294-00		RES,FXD,FILM:11.3K OHM,1%,0.125W,TC=TO	19701	5043ED11K30F
A22A1R1052	321-0319-00		RES,FXD,FILM:20.5K OHM,1%,0.125W,TC=TO	19701	5033ED20K50F
A22A1R1053	321-0340-00		RES,FXD,FILM:34.0K OHM,1%,0.125W,TC=TO	19701	5043ED34K00F
A22A1R1054	321-0361-00		RES,FXD,FILM:56.2K OHM,1%,0.125W,TC=TO	07716	CEAD56201F
A22A1R1055	321-0387-00		RES,FXD,FILM:105K OHM,1%,0.125W,TC=TO	07716	CEAD10502F
A22A1R1056	321-0437-00		RES,FXD,FILM:348K OHM,1%,0.125W,TC=TO	19701	5043ED348K0F
A22A1R1060	321-0437-00		RES,FXD,FILM:348K OHM,1%,0.125W,TC=TO	19701	5043ED348K0F
A22A1R1061	321-0391-00		RES,FXD,FILM:115K OHM,1%,0.125W,TC=TO	07716	CEAD11502F
A22A1R1062	321-0368-00		RES,FXD,FILM:66.5K OHM,1%,0.125W,TC=TO	07716	CEAD66501F
A22A1R1063	321-0353-00		RES,FXD,FILM:46.4K OHM,1%,0.125W,TC=TO	07716	CEAD46401F
A22A1R1064	321-0341-00		RES,FXD,FILM:34.8K OHM,1%,0.125W,TC=TO	19701	5043ED34K80F
A22A1R1065	321-0331-00		RES,FXD,FILM:27.4K OHM,1%,0.125W,TC=TO	19701	5043ED27K40F
A22A1R1070	321-0268-00		RES,FXD,FILM:6.04K OHM,1%,0.125W,TC=TO	19701	5043ED6K040F
A22A1R1072	321-0222-00		RES,FXD,FILM:2.00K OHM,1%,0.125W,TC=TO	19701	5033ED2K00F
A22A1R1073	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A22A1R1074	321-0201-00		RES,FXD,FILM:1.21K OHM,1%,0.125W,TC=TO	19701	5043ED1K210F
A22A1R1076	321-0302-00		RES,FXD,FILM:13.7K OHM,1%,0.125W,TC=TO	07716	CEAD 13701F
A22A1R1079	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A22A1R1080	315-0471-00		RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A22A1R1081	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A22A1R1082	321-0335-00		RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A22A1R1083	315-0432-00		RES,FXD,FILM:4.3K OHM,5%,0.25W	57668	NTR25J-E04K3
A22A1R1086	315-0471-00		RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A22A1R1097	315-0390-00		RES,FXD,FILM:39 OHM,5%,0.25W	57668	NTR25J-E39E0
A22A1R2010	321-1296-07		RES,FXD,FILM:12.0K OHM,0.1%,0.125W,TC=T9	19701	5033RE12K00B
A22A1R2011	321-1296-07		RES,FXD,FILM:12.0K OHM,0.1%,0.125W,TC=T9	19701	5033RE12K00B
A22A1R2012	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A22A1R2013	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A22A1R2014	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A22A1R2015	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A22A1R2016	321-0264-07		RES,FXD,FILM:5.49K OHM,0.1%,0.125W,TC=T9	07716	CEAE54900B
A22A1R2017	321-1617-06		RES,FXD,FILM:5.85K OHM,0.25%,0.125W,TC=T9	07716	CEAE58500C
A22A1R2018	315-0302-00		RES,FXD,FILM:3K OHM,5%,0.25W	57668	NTR25J-E03K0
A22A1R2019	315-0751-00		RES,FXD,FILM:750 OHM,5%,0.25W	57668	NTR25J-E750E
A22A1R2020	315-0152-00		RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A22A1R2025	315-0240-00		RES,FXD,FILM:24 OHM,5%,0.25W	57668	NTR25J-E24E0
A22A1R2026	315-0270-00		RES,FXD,FILM:27 OHM,5%,0.25W	19701	5043CX27R00J
A22A1R2027	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A22A1R2028	315-0152-00		RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A22A1R2030	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A22A1R2031	315-0152-00		RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A22A1R2032	315-0131-00		RES,FXD,FILM:130 OHM,5%,0.25W	19701	5043CX130R0J
A22A1R2033	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A22A1R2035	315-0152-00		RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A22A1R2037	315-0152-00		RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A22A1R2039	315-0270-00		RES,FXD,FILM:27 OHM,5%,0.25W	19701	5043CX27R00J
A22A1R2041	315-0161-00		RES,FXD,FILM:160 OHM,5%,0.25W	57668	NTR25J-E 160E
A22A1R2042	315-0391-00		RES,FXD,FILM:390 OHM,5%,0.25W	57668	NTR25J-E390E
A22A1R2044	315-0161-00		RES,FXD,FILM:160 OHM,5%,0.25W	57668	NTR25J-E 160E
A22A1R2045	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A22A1R2046	321-0205-00		RES,FXD,FILM:1.33K OHM,1%,0.125W,TC=TO	19701	5033ED1K330F
A22A1R2049	321-0268-00		RES,FXD,FILM:6.04K OHM,1%,0.125W,TC=TO	19701	5043ED6K040F
A22A1R2051	321-0329-00		RES,FXD,FILM:26.1K OHM,1%,0.125W,TC=TO	19701	5043ED26K10F
A22A1R2052	321-0326-00		RES,FXD,FILM:24.3K OHM,1%,0.125W,TC=TO	19701	5043ED24K30F
A22A1R2053	321-0323-00		RES,FXD,FILM:22.6K OHM,1%,0.125W,TC=TO	07716	CEAD22601F
A22A1R2054	321-0319-00		RES,FXD,FILM:20.5K OHM,1%,0.125W,TC=TO	19701	5033ED20K50F
A22A1R2055	321-0316-00		RES,FXD,FILM:19.1K OHM,1%,0.125W,TC=TO	07716	CEAD19101F
A22A1R2056	321-0313-00		RES,FXD,FILM:17.8K OHM,1%,0.125W,TC=TO	07716	CEAD17801F
A22A1R2060	321-0309-00		RES,FXD,FILM:16.2K OHM,1%,0.125W,TC=TO	19701	5033ED16K20F
A22A1R2061	321-0306-00		RES,FXD,FILM:15.0K OHM,1%,0.125W,TC=TO	19701	5033ED15J00F
A22A1R2062	321-0303-00		RES,FXD,FILM:14.0K OHM,1%,0.125W,TC=TO	07716	CEAD 14001F
A22A1R2063	321-0299-00		RES,FXD,FILM:12.7K OHM,1%,0.125W,TC=TO	19701	5033ED12K70F
A22A1R2064	321-0296-00		RES,FXD,FILM:11.8K OHM,1%,0.125W,TC=TO	07716	CEAD11801F
A22A1R2065	321-0293-00		RES,FXD,FILM:11.0K OHM,1%,0.125W,TC=TO	07716	CEAD11001F
A22A1R2066	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A22A1R2067	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A22A1R2068	321-0285-09		RES,FXD,FILM:9.09K OHM,1%,0.125W,TC=T9	19701	5033RE9K090F
A22A1R2070	321-0268-00		RES,FXD,FILM:6.04K OHM,1%,0.125W,TC=TO	19701	5043ED6K040F
A22A1R2071	321-0268-00		RES,FXD,FILM:6.04K OHM,1%,0.125W,TC=TO	19701	5043ED6K040F
A22A1R2072	321-0249-00		RES,FXD,FILM:3.83K OHM,1%,0.125W,TC=TO	19701	5033ED3K83F
A22A1R2073	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A22A1R2074	315-0562-00		RES,FXD,FILM:5.6K OHM,5%,0.25W	57668	NTR25J-E05K6
A22A1R2075	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A22A1R2077	321-0286-00		RES,FXD,FILM:9.31K OHM,1%,0.125W,TC=TO	19701	5043ED9K310F
A22A1R2080	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A22A1R2082	321-0229-00		RES,FXD,FILM:2.37K OHM,1%,0.125W,TC=TO	19701	5043ED2K37F
A22A1R2083	321-0321-00		RES,FXD,FILM:21.5K OHM,1%,0.125W,TC=TO	07716	CEAD21501F
A22A1R2084	315-0202-00		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A22A1R2085	315-0105-00		RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A22A1R2086	315-0473-00		RES,FXD,FILM:47K OHM,5%,0.25W	57668	NTR25J-E47K0
A22A1R2087	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A22A1R2088	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A22A1R2089	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A22A1R2090	321-0272-00		RES,FXD,FILM:6.65K OHM,1%,0.125W,TC=TO	19701	5043ED6K650F
A22A1R2092	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A22A1R2093	321-0272-00		RES,FXD,FILM:6.65K OHM,1%,0.125W,TC=TO	19701	5043ED6K650F
A22A1R2097	321-0114-00		RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150ROF
A22A1T1091	120-1386-00		TRANSFORMER,RF:TOROID	80009	120-1386-00
A22A1T2092	120-1392-00		TRANSFORMER,RF:TOROID	80009	120-1392-00
A22A1U1017	156-0105-04		MICROCKT,LINER:OPNL AMPL,SCREENED	01295	LM301AJG4
A22A1U1031	156-1338-02		MICROCKT,LINER:OPERATIONAL AMPLIFIER,SCRN	01295	NE5534P3
A22A1U1059	156-1545-00		MICROCKT,LINER:DIODE ARRAY 7 ISOL DIODES	07263	FSA2720M
A22A1U1073	156-1272-00		MICROCKT,LINER:DUAL OPERATIONAL AMPLIFIER	80009	156-1272-00
A22A1U2016	156-1272-00		MICROCKT,LINER:DUAL OPERATIONAL AMPLIFIER	80009	156-1272-00
A22A1U2031	156-0230-02		MICROCKT,DGTL:ECL,DUAL D-TYPE M/S FF	04713	MC10131LD
A22A1U2041	156-0860-02		MICROCKT,DGTL:TRIPLE LINE RECEIVER	04713	MC10116PD/LD
A22A1U2059	156-1545-00		MICROCKT,LINER:DIODE ARRAY 7 ISOL DIODES	07263	FSA2720M
A22A1U2072	156-1272-00		MICROCKT,LINER:DUAL OPERATIONAL AMPLIFIER	80009	156-1272-00
A22A1VR2021	152-0486-00		SEMICOND DVC,DI:ZEN,SI,6.2V,2%,400MW,DO-35	80009	152-0486-00
A22A1W2069	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A22A1W2081	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A22A2	-----		(PART OF A22)		
A22A2C2200	281-0825-00		CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A22A2C2201	281-0825-00		CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A22A2C2202	281-0825-00		CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A22A2C2203	281-0875-00		CAP,FXD,CER DI:100PF,20%,200V	72982	2425001X5U101M
A22A2C2204	281-0875-00		CAP,FXD,CER DI:100PF,20%,200V	72982	2425001X5U101M
A22A2P220	131-2017-00		CONN,RCPT,ELEC:	24931	3JR152-1

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A22A2P221	131-1170-00		CONN,RCPT,ELEC:SNAP-ON,MALE	98291	051-045-0249
A22A2P222	131-2017-00		CONN,RCPT,ELEC:	24931	3JR152-1
A22A2AAC1014	283-0181-00		CAP,FXD,CER DI:1.8PF,+/-0.1%,100V	51642	100 100NP0189B
A22A2A1	670-7395-01		CIRCUIT BD ASSY:2182MHZ MICRO STRIP OSC	80009	670-7395-01
A22A2A1C1011	283-0181-00		CAP,FXD,CER DI:1.8PF,+/-0.1%,100V	51642	100 100NP0189B
A22A2A1C1013	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A22A2A1C1033	283-0181-00		CAP,FXD,CER DI:1.8PF,+/-0.1%,100V	51642	100 100NP0189B
A22A2A1C2011	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A22A2A1C2012	283-0181-00		CAP,FXD,CER DI:1.8PF,+/-0.1%,100V	51642	100 100NP0189B
A22A2A1C2013	283-0181-00		CAP,FXD,CER DI:1.8PF,+/-0.1%,100V	51642	100 100NP0189B
A22A2A1C2023	283-0181-00		CAP,FXD,CER DI:1.8PF,+/-0.1%,100V	51642	100 100NP0189B
A22A2A1C2024	290-0517-00		CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T368B685M035AZ
A22A2A1C2025	283-0181-00		CAP,FXD,CER DI:1.8PF,+/-0.1%,100V	51642	100 100NP0189B
A22A2A1C2031	283-0181-00		CAP,FXD,CER DI:1.8PF,+/-0.1%,100V	51642	100 100NP0189B
A22A2A1C2032	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A22A2A1C2033	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A22A2A1CR1028	152-0722-00		SEMICONDCONV.DI:VVC,SI,45 V,1.5 PF AT 4 V	17540	DVH-6934-98
A22A2A1CR2013	152-0141-02		SEMICONDCONV.DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A22A2A1CR2021	152-0141-02		SEMICONDCONV.DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A22A2A1CR2031	152-0141-02		SEMICONDCONV.DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A22A2A1L1011	108-0682-00		COIL,RF:FIXED,61NH	80009	108-0682-00
A22A2A1L1014	108-0682-00		COIL,RF:FIXED,61NH	80009	108-0682-00
A22A2A1L2011	108-0682-00		COIL,RF:FIXED,61NH	80009	108-0682-00
A22A2A1L2013	108-0682-00		COIL,RF:FIXED,61NH	80009	108-0682-00
A22A2A1L2023	108-0682-00		COIL,RF:FIXED,61NH	80009	108-0682-00
A22A2A1L2025	108-0682-00		COIL,RF:FIXED,61NH	80009	108-0682-00
A22A2A1L2031	108-0682-00		COIL,RF:FIXED,61NH	80009	108-0682-00
A22A2A1L2032	108-0682-00		COIL,RF:FIXED,61NH	80009	108-0682-00
A22A2A1L2033	108-0682-00		COIL,RF:FIXED,61NH	80009	108-0682-00
A22A2A1Q1011	151-0689-00		TRANSISTOR:NPN,SI,MICRO-X	80009	151-0689-00
A22A2A1Q1021	151-0630-00		TRANSISTOR:NPN,SI,4 LEAD,CER PKG	S0545	NE02135
A22A2A1Q1031	151-0689-00		TRANSISTOR:NPN,SI,MICRO-X	80009	151-0689-00
A22A2A1Q2021	151-0301-00		TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A22A2A1R1011	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R1012	321-0134-00		RES,FXD,FILM:243 OHM,1%,0.125W,TC=TO	19701	5043ED243R0F
A22A2A1R1013	321-0216-00		RES,FXD,FILM:1.74K OHM,1%,0.125W,TC=TO	07716	CEAD17400F
A22A2A1R1015	317-0104-00		RES,FXD,CMPSN:100K OHM,5%,0.125W	01121	BB1045
A22A2A1R1021	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R1022	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R1023	317-0240-00		RES,FXD,CMPSN:24 OHM,5%,0.125W	01121	BB2405
A22A2A1R1026	317-0240-00		RES,FXD,CMPSN:24 OHM,5%,0.125W	01121	BB2405
A22A2A1R1027	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R1028	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R1029	317-0240-00		RES,FXD,CMPSN:24 OHM,5%,0.125W	01121	BB2405
A22A2A1R1032	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R1033	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R2013	321-0250-00		RES,FXD,FILM:3.92K OHM,1%,0.125W,TC=TO	07716	CEAD39200F
A22A2A1R2014	317-0243-00		RES,FXD,CMPSN:24K OHM,5%,0.125W	01121	BB2435
A22A2A1R2015	317-0472-00		RES,FXD,CMPSN:4.7K OHM,5%,0.125W	01121	BB4725
A22A2A1R2016	317-0622-00		RES,FXD,CMPSN:6.2K OHM,5%,0.125W	01121	BB6225
A22A2A1R2017	317-0390-00		RES,FXD,CMPSN:39 OHM,5%,0.125W	01121	BB3905
A22A2A1R2021	317-0103-00		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A22A2A1R2022	317-0102-00		RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A22A2A1R2023	317-0390-00		RES,FXD,CMPSN:39 OHM,5%,0.125W	01121	BB3905
A22A2A1R2024	317-0151-00		RES,FXD,CMPSN:150 OHM,5%,0.125W	01121	BB1515
A22A2A1R2025	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R2030	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R2031	321-0265-00		RES,FXD,FILM:5.62K OHM,1%,0.125W,TC=TO	19701	5043ED5K620F

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A22A2A1R2032	321-0932-00		RES,FXD,FILM:2.5K OHM,1%,0.125W,TC=T0	24546	NA55D2501F
A22A2A1R2033	321-0149-00		RES,FXD,FILM:348 OHM,1%,0.125W,TC=T0	07716	CEAD348ROF
A22A2A2	670-7076-01		CIRCUIT BD ASSY:2200MHZ REF	80009	670-7076-01
A22A2A2C1025	283-0157-00		CAP,FXD,CER DI:7PF,5%,50V	04222	SR155A7R0DAA
A22A2A2C1029	283-0070-00		CAP,FXD,CER DI:30PF,10%,50V	51642	200-050-NPO-300K
A22A2A2C1036	283-0154-00		CAP,FXD,CER DI:22PF,5%,50V	04222	SR155A220JAA
A22A2A2C1038	283-0156-00		CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A22A2A2C2015	283-0185-00		CAP,FXD,CER DI:2.5PF,0.5%,50V	51642	100-050-NPO-259B
A22A2A2C2021	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A22A2A2C2023	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A22A2A2C2026	283-0108-00		CAP,FXD,CER DI:220PF,10%,200V	04222	SR152A221KAA
A22A2A2C3015	283-0158-00		CAP,FXD,CER DI:1PF,+/-0.1PF,50V	51642	100-050-NPO-109B
A22A2A2C3024	290-0517-00		CAP,FXD,ELCTLT:6.8UF,20%,35V	05397	T3688685M035AZ
A22A2A2CR2014	152-0153-00		SEMICON DVC,DI:SW,SI,10V,50MA,.DO-7	07263	FD7003
A22A2A2E2014	276-0543-00		SHLD BEAD,ELEK:FERRITE	80009	276-0543-00
A22A2A2E2015	276-0543-00		SHLD BEAD,ELEK:FERRITE	80009	276-0543-00
A22A2A2L1025	108-0436-00		COIL,RF:FIXED,240UH ON FORM	80009	108-0436-00
A22A2A2L1034	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A22A2A2Q1024	151-0441-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF501
A22A2A2Q2024	151-0441-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF501
A22A2A2R2018	317-0330-00		RES,FXD,CMPSN:33 OHM,5%,0.125W	01121	BB3305
A22A2A2R2019	317-0431-00		RES,FXD,CMPSN:430 OHM,5%,0.125W	01121	BB4315
A22A2A2R2021	315-0122-00		RES,FXD,FILM:1.2K OHM,5%,0.25W	57668	NTR25J-E01K2
A22A2A2R2023	315-0821-00		RES,FXD,FILM:820 OHM,5%,0.25W	19701	5043CX820ROJ
A22A2A2R2032	315-0331-00		RES,FXD,FILM:330 OHM,5%,0.25W	57668	NTR25J-E330E
A22A2A2R2033	315-0331-00		RES,FXD,FILM:330 OHM,5%,0.25W	57668	NTR25J-E330E
A22A2A2R3014	317-0301-00		RES,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A22A2A2R3015	317-0360-00		RES,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A22A2A2R3016	317-0360-00		RES,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A22A2A2R3021	317-0301-00		RES,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A22A2A2R3025	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A22A2A2T2015	120-1393-00		TRANSFORMER,RF:BALUN	80009	120-1393-00
A22A2A3	670-7079-00		CIRCUIT BD ASSY:2200MHZ REFERENCE MIXER	80009	670-7079-00
A22A2A3C1013	283-0107-00		CAP,FXD,CER DI:51PF,5%,200V	04222	SR206A510JAA
A22A2A3C1014	283-0108-00		CAP,FXD,CER DI:220PF,10%,200V	04222	SR152A221KAA
A22A2A3C1015	283-0108-00		CAP,FXD,CER DI:220PF,10%,200V	04222	SR152A221KAA
A22A2A3C1016	283-0139-00		CAP,FXD,CER DI:150PF,20%,50V	05397	C312C151M5G5CA
A22A2A3CR1011	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A22A2A3CR1012	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A22A2A3L1013	108-0182-00		COIL,RF:FIXED,293NH	80009	108-0182-00
A22A2A3L1014	108-0182-00		COIL,RF:FIXED,293NH	80009	108-0182-00
A22A2A3L1015	108-0182-00		COIL,RF:FIXED,293NH	80009	108-0182-00
A23	119-1131-05		SEC CONN ASSY:829MHZ	80009	119-1131-05
A23C230	281-0825-00		CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A23C231	281-0697-00		CAP,FXD,CER DI:5000PF,+100-0%,100V	72982	2425-003WSW0502Z
A23C232	281-0825-00		CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A23C233	281-0697-00		CAP,FXD,CER DI:5000PF,+100-0%,100V	72982	2425-003WSW0502Z
A23C234	281-0825-00		CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A23C235	281-0697-00		CAP,FXD,CER DI:5000PF,+100-0%,100V	72982	2425-003WSW0502Z
A23C236	281-0825-00		CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A23C237	281-0697-00		CAP,FXD,CER DI:5000PF,+100-0%,100V	72982	2425-003WSW0502Z
A23C239	281-0697-00		CAP,FXD,CER DI:5000PF,+100-0%,100V	72982	2425-003WSW0502Z
A23P231	131-2017-00		CONN,RCPT,ELEC:	24931	3JR152-1
A23P232	131-1170-00		CONN,RCPT,ELEC:SNAP-ON,MALE	98291	051-045-0249
A23P233	131-1170-00		CONN,RCPT,ELEC:SNAP-ON,MALE	98291	051-045-0249
A23P235	131-1170-00		CONN,RCPT,ELEC:SNAP-ON,MALE	98291	051-045-0249
A23P236	131-2017-00		CONN,RCPT,ELEC:	24931	3JR152-1
A23P237	131-2017-00		CONN,RCPT,ELEC:	24931	3JR152-1

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A23U1013	156-0285-00		MICROCKT, LINEAR:VOLTAGE REGULATOR	04713	MC7812CT
A23U2026	156-0872-00		MICROCKT, LINEAR:VOLTAGE REGULATOR	04713	MC7912CT
A23U3024	156-0277-00		MICROCKT, LINEAR:VOLTAGE REGULATOR	04713	LM340T-5.0
A23A1	670-5936-00		CIRCUIT BD ASSY:719MHZ SECOND LO	80009	670-5936-00
A23A1C1011	283-0326-00		CAP, FXD, CER DI: 0.082UF, 10%, 50V	04222	SR205C823KAA
A23A1C1012	283-0330-00		CAP, FXD, CER DI: 100PF, 5%, 50V	05397	C320C101J5R5CA
A23A1C1013	283-0140-00		CAP, FXD, CER DI: 4.7PF, +/-0.25PF, 50V	72982	8101E003A479C
A23A1C1021	283-0159-00		CAP, FXD, CER DI: 18PF, 5%, 50V	04222	SR155A180JAA
A23A1C1022	283-0140-00		CAP, FXD, CER DI: 4.7PF, +/-0.25PF, 50V	72982	8101E003A479C
A23A1C1023	283-0140-00		CAP, FXD, CER DI: 4.7PF, +/-0.25PF, 50V	72982	8101E003A479C
A23A1C1024	283-0176-00		CAP, FXD, CER DI: 0.0022UF, 20%, 50V	04222	SR205C222MAA
A23A1C1025	283-0176-00		CAP, FXD, CER DI: 0.0022UF, 20%, 50V	04222	SR205C222MAA
A23A1C2011	283-0326-00		CAP, FXD, CER DI: 0.082UF, 10%, 50V	04222	SR205C823KAA
A23A1C2012	283-0160-00		CAP, FXD, CER DI: 1.5PF, +/-0.1PF, 50V	51642	100050NP0159B
A23A1C2013	283-0158-00		CAP, FXD, CER DI: 1PF, +/-0.1PF, 50V	51642	100-050-NPO-1098
A23A1C2014	283-0176-00		CAP, FXD, CER DI: 0.0022UF, 20%, 50V	04222	SR205C222MAA
A23A1C2015	283-0176-00		CAP, FXD, CER DI: 0.0022UF, 20%, 50V	04222	SR205C222MAA
A23A1C2021	283-0159-00		CAP, FXD, CER DI: 18PF, 5%, 50V	04222	SR155A180JAA
A23A1C2022	283-0140-00		CAP, FXD, CER DI: 4.7PF, +/-0.25PF, 50V	72982	8101E003A479C
A23A1C2023	283-0140-00		CAP, FXD, CER DI: 4.7PF, +/-0.25PF, 50V	72982	8101E003A479C
A23A1C2024	283-0176-00		CAP, FXD, CER DI: 0.0022UF, 20%, 50V	04222	SR205C222MAA
A23A1CR1011	152-0738-00		SEMICON DVC, DI: VVC, SI, 30V, 1.2PF, DO-35	50101	GC-10580-15
A23A1L1011	108-0733-00		COIL, RF: FIXED, 117NH	80009	108-0733-00
A23A1L1021	108-0733-00		COIL, RF: FIXED, 117NH	80009	108-0733-00
A23A1L2010	108-0733-00		COIL, RF: FIXED, 117NH	80009	108-0733-00
A23A1L2021	108-0733-00		COIL, RF: FIXED, 117NH	80009	108-0733-00
A23A1Q1021	151-0630-00		TRANSISTOR: NPN, SI, 4 LEAD, CER PKG	S0545	NE02135
A23A1Q2014	151-0447-00		TRANSISTOR: NPN, SI, TO-72	04713	SRF502-1
A23A1Q2021	151-0630-00		TRANSISTOR: NPN, SI, 4 LEAD, CER PKG	S0545	NE02135
A23A1R1011	317-0101-00		RES, FXD, CMPSN: 100 OHM, 5%, 0.125W	01121	BB1015
A23A1R1020	317-0220-00		RES, FXD, CMPSN: 22 OHM, 5%, 0.125W	01121	BB2205
A23A1R1021	317-0750-00		RES, FXD, CMPSN: 75 OHM, 5%, 0.125W	01121	BB7505
A23A1R1022	317-0330-00		RES, FXD, CMPSN: 33 OHM, 5%, 0.125W	01121	BB3305
A23A1R1023	317-0272-00		RES, FXD, CMPSN: 2.7K OHM, 5%, 0.125W	01121	BB2725
A23A1R1024	315-0271-00		RES, FXD, FILM: 270 OHM, 5%, 0.25W	57668	NTR25J-E270E
A23A1R1025	317-0471-00		RES, FXD, CMPSN: 470 OHM, 5%, 0.125W	01121	BB4715
A23A1R2010	317-0510-00		RES, FXD, CMPSN: 51 OHM, 5%, 0.125W	01121	BB5105
A23A1R2011	317-0470-00		RES, FXD, CMPSN: 47 OHM, 5%, 0.125W	01121	BB4705
A23A1R2012	317-0102-00		RES, FXD, CMPSN: 1K OHM, 5%, 0.125W	01121	BB1025
A23A1R2013	317-0241-00		RES, FXD, CMPSN: 240 OHM, 5%, 0.125W	01121	BB2415
A23A1R2014	317-0202-00		RES, FXD, CMPSN: 2K OHM, 5%, 0.125W	01121	BB2025
A23A1R2016	315-0271-00		RES, FXD, FILM: 270 OHM, 5%, 0.25W	57668	NTR25J-E270E
A23A1R2021	317-0510-00		RES, FXD, CMPSN: 51 OHM, 5%, 0.125W	01121	BB5105
A23A1R2023	317-0272-00		RES, FXD, CMPSN: 2.7K OHM, 5%, 0.125W	01121	BB2725
A23A1R2024	317-0471-00		RES, FXD, CMPSN: 470 OHM, 5%, 0.125W	01121	BB4715
A23A1R2025	317-0241-00		RES, FXD, CMPSN: 240 OHM, 5%, 0.125W	01121	BB2415
A23A1R2026	317-0510-00		RES, FXD, CMPSN: 51 OHM, 5%, 0.125W	01121	BB5105
A23A1R2027	317-0360-00		RES, FXD, CMPSN: 36 OHM, 5%, 0.125W	01121	BB3605
A23A1R2028	317-0360-00		RES, FXD, CMPSN: 36 OHM, 5%, 0.125W	01121	BB3605
A23A1R2029	317-0301-00		RES, FXD, CMPSN: 300 OHM, 5%, 0.125W	01121	BB3015
A23A2	670-5937-03		CIRCUIT BD ASSY: 25MHZ PHASE LOCK	80009	670-5937-03
A23A2C1011	283-0176-00		CAP, FXD, CER DI: 0.0022UF, 20%, 50V	04222	SR205C222MAA
A23A2C1024	283-0176-00		CAP, FXD, CER DI: 0.0022UF, 20%, 50V	04222	SR205C222MAA
A23A2C1031	283-0204-00		CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A23A2C1037	283-0204-00		CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A23A2C1045	283-0204-00		CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A23A2C1046	283-0176-00		CAP, FXD, CER DI: 0.0022UF, 20%, 50V	04222	SR205C222MAA
A23A2C1049	283-0176-00		CAP, FXD, CER DI: 0.0022UF, 20%, 50V	04222	SR205C222MAA

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A23A2C1052	290-0876-00		CAP, FXD, ELCTLT: 15UF, 20%, 25 WVDC	05397	T330C156M025AS
A23A2C1057	283-0176-00		CAP, FXD, CER DI: 0.0022UF, 20%, 50V	04222	SR205C222MAA
A23A2C2011	283-0326-00		CAP, FXD, CER DI: 0.082UF, 10%, 50V	04222	SR205C823KAA
A23A2C2012	283-0326-00		CAP, FXD, CER DI: 0.082UF, 10%, 50V	04222	SR205C823KAA
A23A2C2021	290-0876-00		CAP, FXD, ELCTLT: 15UF, 20%, 25 WVDC	05397	T330C156M025AS
A23A2C2023	283-0326-00		CAP, FXD, CER DI: 0.082UF, 10%, 50V	04222	SR205C823KAA
A23A2C2024	290-0876-00		CAP, FXD, ELCTLT: 15UF, 20%, 25 WVDC	05397	T330C156M025AS
A23A2C2025	283-0326-00		CAP, FXD, CER DI: 0.082UF, 10%, 50V	04222	SR205C823KAA
A23A2C2032	283-0326-00		CAP, FXD, CER DI: 0.082UF, 10%, 50V	04222	SR205C823KAA
A23A2C2041	283-0176-00		CAP, FXD, CER DI: 0.0022UF, 20%, 50V	04222	SR205C222MAA
A23A2C2042	283-0204-00		CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A23A2C2051	283-0326-00		CAP, FXD, CER DI: 0.082UF, 10%, 50V	04222	SR205C823KAA
A23A2C2052	290-0876-00		CAP, FXD, ELCTLT: 15UF, 20%, 25 WVDC	05397	T330C156M025AS
A23A2C2053	283-0326-00		CAP, FXD, CER DI: 0.082UF, 10%, 50V	04222	SR205C823KAA
A23A2C2054	283-0326-00		CAP, FXD, CER DI: 0.082UF, 10%, 50V	04222	SR205C823KAA
A23A2C2055	283-0197-00		CAP, FXD, CER DI: 470PF, 5%, 50V	04222	SR205A471JAA
A23A2C2056	290-0876-00		CAP, FXD, ELCTLT: 15UF, 20%, 25 WVDC	05397	T330C156M025AS
A23A2C2057	290-0876-00		CAP, FXD, ELCTLT: 15UF, 20%, 25 WVDC	05397	T330C156M025AS
A23A2C3021	283-0326-00		CAP, FXD, CER DI: 0.082UF, 10%, 50V	04222	SR205C823KAA
A23A2C3022	283-0326-00		CAP, FXD, CER DI: 0.082UF, 10%, 50V	04222	SR205C823KAA
A23A2C3023	290-0876-00		CAP, FXD, ELCTLT: 15UF, 20%, 25 WVDC	05397	T330C156M025AS
A23A2C3031	283-0326-00		CAP, FXD, CER DI: 0.082UF, 10%, 50V	04222	SR205C823KAA
A23A2C3035	283-0326-00		CAP, FXD, CER DI: 0.082UF, 10%, 50V	04222	SR205C823KAA
A23A2C3038	290-0876-00		CAP, FXD, ELCTLT: 15UF, 20%, 25 WVDC	05397	T330C156M025AS
A23A2C3042	283-0197-00		CAP, FXD, CER DI: 470PF, 5%, 50V	04222	SR205A471JAA
A23A2C3043	283-0326-00		CAP, FXD, CER DI: 0.082UF, 10%, 50V	04222	SR205C823KAA
A23A2C3044	283-0326-00		CAP, FXD, CER DI: 0.082UF, 10%, 50V	04222	SR205C823KAA
A23A2C3055	283-0186-00		CAP, FXD, CER DI: 27PF, 5%, 50V	04222	SR155A 270JAA
A23A2C3056	283-0326-00		CAP, FXD, CER DI: 0.082UF, 10%, 50V	04222	SR205C823KAA
A23A2CR2015	152-0141-02		SEMICONDC DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A23A2CR3025	152-0066-00		SEMICONDC DVC, DI: RECT, SI, 400V, 1A, DO-41	05828	GP10G-020
A23A2L2013	108-1140-00		COIL, RF: FXD, 1.1MH	TK1345	108-1140-00
A23A2L2018	108-1140-00		COIL, RF: FXD, 1.1MH	TK1345	108-1140-00
A23A2L2031	108-0733-00		COIL, RF: FIXED, 117NH	80009	108-0733-00
A23A2L2033	108-0733-00		COIL, RF: FIXED, 117NH	80009	108-0733-00
A23A2L3011	108-1140-00		COIL, RF: FXD, 1.1MH	TK1345	108-1140-00
A23A2L3034	108-0733-00		COIL, RF: FIXED, 117NH	80009	108-0733-00
A23A2Q2016	151-0301-00		TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A23A2Q2017	151-0302-00		TRANSISTOR: NPN, SI, TO-18	04713	ST899
A23A2Q3015	151-0302-00		TRANSISTOR: NPN, SI, TO-18	04713	ST899
A23A2R1021	317-0510-00		RES, FXD, CMPSN: 51 OHM, 5%, 0.125W	01121	BB5105
A23A2R1023	317-0510-00		RES, FXD, CMPSN: 51 OHM, 5%, 0.125W	01121	BB5105
A23A2R1026	317-0471-00		RES, FXD, CMPSN: 470 OHM, 5%, 0.125W	01121	BB4715
A23A2R1027	317-0471-00		RES, FXD, CMPSN: 470 OHM, 5%, 0.125W	01121	BB4715
A23A2R1029	317-0471-00		RES, FXD, CMPSN: 470 OHM, 5%, 0.125W	01121	BB4715
A23A2R1032	317-0047-00		RES, FXD, CMPSN: 4.7 OHM, 5%, 0.125W	01121	BB47G5
A23A2R1033	317-0471-00		RES, FXD, CMPSN: 470 OHM, 5%, 0.125W	01121	BB4715
A23A2R1034	317-0047-00		RES, FXD, CMPSN: 4.7 OHM, 5%, 0.125W	01121	BB47G5
A23A2R1035	317-0471-00		RES, FXD, CMPSN: 470 OHM, 5%, 0.125W	01121	BB4715
A23A2R1038	317-0471-00		RES, FXD, CMPSN: 470 OHM, 5%, 0.125W	01121	BB4715
A23A2R1041	317-0047-00		RES, FXD, CMPSN: 4.7 OHM, 5%, 0.125W	01121	BB47G5
A23A2R1043	317-0471-00		RES, FXD, CMPSN: 470 OHM, 5%, 0.125W	01121	BC4, 15
A23A2R1051	317-0100-00		RES, FXD, CMPSN: 10 OHM, 5%, 0.125W	01121	BB1005
A23A2R1058	317-0510-00		RES, FXD, CMPSN: 51 OHM, 5%, 0.125W	01121	BB5105
A23A2R2014	317-0393-00		RES, FXD, CMPSN: 39K OHM, 5%, 0.125W	01121	BB3935
A23A2R2015	317-0203-00		RES, FXD, CMPSN: 20K OHM, 5%, 0.125W	01121	BB2035
A23A2R2034	317-0047-00		RES, FXD, CMPSN: 4.7 OHM, 5%, 0.125W	01121	BB47G5
A23A2R2040	317-0471-00		RES, FXD, CMPSN: 470 OHM, 5%, 0.125W	01121	BB4715

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A23A2R2041	317-0102-00		RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A23A2R2043	317-0471-00		RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R2044	317-0102-00		RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A23A2R2045	317-0102-00		RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A23A2R2046	317-0471-00		RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R2047	317-0471-00		RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R2048	317-0361-00		RES,FXD,CMPSN:360 OHM,5%,0.125W	01121	BB3615
A23A2R2049	317-0471-00		RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R2051	317-0470-00		RES,FXD,CMPSN:47 OHM,5%,0.125W	01121	BB4705
A23A2R2052	317-0510-00		RES,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A23A2R2053	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A2R2054	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A2R2055	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A2R2056	317-0361-00		RES,FXD,CMPSN:360 OHM,5%,0.125W	01121	BB3615
A23A2R3012	317-0303-00		RES,FXD,CMPSN:30K OHM,5%,0.125W	01121	BB3035
A23A2R3013	317-0203-00		RES,FXD,CMPSN:20K OHM,5%,0.125W	01121	BB2035
A23A2R3014	317-0752-00		RES,FXD,CMPSN:7.5K OHM,5%,0.125W	01121	BB7525
A23A2R3016	317-0752-00		RES,FXD,CMPSN:7.5K OHM,5%,0.125W	01121	BB7525
A23A2R3037	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A2R3041	317-0361-00		RES,FXD,CMPSN:360 OHM,5%,0.125W	01121	BB3615
A23A2R3045	317-0361-00		RES,FXD,CMPSN:360 OHM,5%,0.125W	01121	BB3615
A23A2R3046	317-0471-00		RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R3051	317-0332-00		RES,FXD,CMPSN:3.3K OHM,5%,0.125W	01121	BB3325
A23A2R3052	317-0752-00		RES,FXD,CMPSN:7.5K OHM,5%,0.125W	01121	BB7525
A23A2R3054	317-0100-00		RES,FXD,CMPSN:10 OHM,5%,0.125W	01121	BB1005
A23A2U1022	156-0860-02		MICROCKT,DGTL:TRIPLE LINE RECEIVER	04713	MC10116PD/LD
A23A2U1036	156-0230-02		MICROCKT,DGTL:ECL,DUAL D-TYPE M/S FF	04713	MC10131LD
A23A2U1044	156-0860-02		MICROCKT,DGTL:TRIPLE LINE RECEIVER	04713	MC10116PD/LD
A23A2U1053	156-0074-00		MICROCKT,LINEAR:VIDEO AMPL,DIFF INP-OUT	80009	156-0074-00
A23A2U2047	156-0230-02		MICROCKT,DGTL:ECL,DUAL D-TYPE M/S FF	04713	MC10131LD
A23A2U3053	156-0742-02		MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A23A2VR1048	152-0647-00		SEMICON DVC,DI:ZENER,SI,6.8V,5%,400MW,DO-7	04713	1N957B
A23A3	670-6016-00		CIRCUIT BD ASSY:829MHZ HARMONIC MIXER	80009	670-6016-00
A23A3C1021	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A3C1022	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A3C1023	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A3C2021	283-0159-00		CAP,FXD,CER DI:18PF,5%,50V	04222	SR155A180JAA
A23A3C2023	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A3C2024	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A3C3011	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A3C3013	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A23A3C3014	283-0159-00		CAP,FXD,CER DI:18PF,5%,50V	04222	SR155A180JAA
A23A3C3020	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A23A3C3021	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A23A3C3022	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A3C3023	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A3C3024	283-0159-00		CAP,FXD,CER DI:18PF,5%,50V	04222	SR155A180JAA
A23A3C3025	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A3CR2021	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A23A3CR3011	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A23A3L2014	108-0643-00		COIL,RF:FIXED,54NH	80009	108-0643-00
A23A3L3011	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A3L3012	108-0215-00		COIL,RF:FIXED,1.1UH	TK1345	108-0215-00
A23A3L3014	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A3L3021	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A3Q3021	151-0630-00		TRANSISTOR:NPN,SI,4 LEAD,CER PKG	S0545	NE02135
A23A3R1021	317-0820-00		RES,FXD,CMPSN:82 OHM,5%,0.125W	01121	BB8205
A23A3R1022	317-0820-00		RES,FXD,CMPSN:82 OHM,5%,0.125W	01121	BB8205

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A23A3R1023	317-0430-00			RES,FXD,CMPSN:43 OHM,5%,0.125W	01121	BB4305
A23A3R2021	317-0301-00			RES,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A23A3R2022	317-0160-00			RES,FXD,CMPSN:16 OHM,5%,0.125W	01121	BB1605
A23A3R2023	317-0680-00			RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A23A3R2024	317-0430-00			RES,FXD,CMPSN:43 OHM,5%,0.125W	01121	BB4305
A23A3R2025	317-0820-00			RES,FXD,CMPSN:82 OHM,5%,0.125W	01121	BB8205
A23A3R2026	317-0820-00			RES,FXD,CMPSN:82 OHM,5%,0.125W	01121	BB8205
A23A3R2027	317-0680-00			RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A23A3R2028	317-0160-00			RES,FXD,CMPSN:16 OHM,5%,0.125W	01121	BB1605
A23A3R3010	317-0222-00			RES,FXD,CMPSN:2.2K OHM,5%,0.125W	01121	BB2225
A23A3R3011	317-0271-00			RES,FXD,FILM:270 OHM,5%,0.25W	57668	NTR25J-E270E
A23A3R3012	317-0101-00			RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A3R3021	317-0360-00			RES,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A23A3R3022	317-0360-00			RES,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A23A3R3023	317-0301-00			RES,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A23A3R3024	317-0471-00			RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A3R3025	317-0272-00			RES,FXD,CMPSN:2.7K OHM,5%,0.125W	01121	BB2725
A23A3R3027	317-0750-00			RES,FXD,CMPSN:75 OHM,5%,0.125W	01121	BB7505
A23A3R3028	317-0510-00			RES,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A23A3R3029	317-0750-00			RES,FXD,CMPSN:75 OHM,5%,0.125W	01121	BB7505
A23A4	670-6256-03			CIRCUIT BD ASSY:829MHZ DIPLEXER	80009	670-6256-03
A23A4C1010	283-0158-00			CAP,FXD,CER DI:1PF,+/-0.1PF,50V	51642	100-050-NPO-109B
A23A4C1011	283-0158-00			CAP,FXD,CER DI:1PF,+/-0.1PF,50V	51642	100-050-NPO-109B
A23A4C1012	283-0203-00			CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR305SC474MAA
A23A4C1013	283-0158-00			CAP,FXD,CER DI:1PF,+/-0.1PF,50V	51642	100-050-NPO-109B
A23A4C1014	283-0158-00			CAP,FXD,CER DI:1PF,+/-0.1PF,50V	51642	100-050-NPO-109B
A23A4C1015	283-0160-00			CAP,FXD,CER DI:1.5PF,+/-0.1PF,50V	51642	100050NP0159B
A23A4C1016	283-0326-00			CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A4C1017	283-0326-00			CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A4C1018	283-0326-00			CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A4C1019	283-0326-00			CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A4C1021	283-0158-00			CAP,FXD,CER DI:1PF,+/-0.1PF,50V	51642	100-050-NPO-109B
A23A4L1010	108-1043-00			COIL,RF:FXD,2MH	80009	108-1043-00
A23A4L1011	108-0598-00			COIL,RF:FIXED,200UH	80009	108-0598-00
A23A4L1012	108-0642-00			COIL,RF:FIXED,30NH	80009	108-0642-00
A23A4L1015	108-0642-00			COIL,RF:FIXED,30NH	80009	108-0642-00
A23A4R1011	317-0101-00			RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A4R1012	317-0101-00			RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A4R1013	317-0200-00			RES,FXD,CMPSN:20 OHM,5%,0.125W	01121	BB2005
A23A4R1014	317-0101-00			RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A4R1015	317-0101-00			RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A5	670-6255-01			CIRCUIT BD ASSY:829MHZ AMPL	80009	670-6255-01
A23A5C1011	283-0326-00			CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A5C1012	283-0326-00			CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A5C1013	283-0326-00			CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A5C1014	283-0197-00			CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A23A5C1015	283-0160-00			CAP,FXD,CER DI:1.5PF,+/-0.1PF,50V	51642	100050NP0159B
A23A5C1016	283-0197-00			CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A23A5C1017	283-0160-00			CAP,FXD,CER DI:1.5PF,+/-0.1PF,50V	51642	100050NP0159B
A23A5C1018	283-0140-00			CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A5C1021	283-0160-00			CAP,FXD,CER DI:1.5PF,+/-0.1PF,50V	51642	100050NP0159B
A23A5C1022	283-0160-00			CAP,FXD,CER DI:1.5PF,+/-0.1PF,50V	51642	100050NP0159B
A23A5C1023	283-0197-00			CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A23A5C1024	283-0326-00			CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A5C1025	283-0326-00			CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A5C1026	283-0140-00			CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A5C1027	283-0326-00			CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A5C1029	283-0326-00			CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA



Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A23A5CR1013	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A23A5CR1022	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A23A5J1029	131-1003-00		CONN,RCPT,ELEC:CKT BD MT,3 PRONG	80009	131-1003-00
A23A5L1011	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A5L1012	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A5L1014	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A5L1021	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A5L1024	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A5L1025	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A5L1029	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A5Q1017	151-0630-00		TRANSISTOR:NPN,SI,4 LEAD,CER PKG	S0545	NE02135
A23A5Q1025	151-0630-00		TRANSISTOR:NPN,SI,4 LEAD,CER PKG	S0545	NE02135
A23A5R1011	321-0234-00		RES,FXD,FILM:2.67K OHM,1%,0.125W,TC=T0	19701	5033ED2K67F
A23A5R1012	321-0202-00		RES,FXD,FILM:1.24K OHM,1%,0.125W,TC=T0	24546	NA55D1241F
A23A5R1013	317-0511-00		RES,FXD,CMPNS:510 OHM,5%,0.125W	01121	BB5115
A23A5R1014	317-0511-00		RES,FXD,CMPNS:510 OHM,5%,0.125W	01121	BB5115
A23A5R1015	317-0151-00		RES,FXD,CMPNS:150 OHM,5%,0.125W	01121	BB1515
A23A5R1016	317-0201-00		RES,FXD,CMPNS:200 OHM,5%,0.125W	01121	BB2015
A23A5R1020	317-0201-00		RES,FXD,CMPNS:200 OHM,5%,0.125W	01121	BB2015
A23A5R1021	321-0202-00		RES,FXD,FILM:1.24K OHM,1%,0.125W,TC=T0	24546	NA55D1241F
A23A5R1022	321-0234-00		RES,FXD,FILM:2.67K OHM,1%,0.125W,TC=T0	19701	5033ED2K67F
A23A5R1023	317-0151-00		RES,FXD,CMPNS:150 OHM,5%,0.125W	01121	BB1515
A23A5R1024	317-0331-00		RES,FXD,CMPNS:330 OHM,5%,0.125W	01121	BB3315
A23A5R1025	317-0331-00		RES,FXD,CMPNS:330 OHM,5%,0.125W	01121	BB3315
A23A5R1026	317-0360-00		RES,FXD,CMPNS:36 OHM,5%,0.125W	01121	BB3605
A23A5R1027	317-0360-00		RES,FXD,CMPNS:36 OHM,5%,0.125W	01121	BB3605
A23A5R1028	317-0301-00		RES,FXD,CMPNS:300 OHM,5%,0.125W	01121	BB3015
A23A5R1029	317-0301-00		RES,FXD,CMPNS:300 OHM,5%,0.125W	01121	BB3015
A23A6	670-6015-01		CIRCUIT BD ASSY:110MHZ IF SELECT	80009	670-6015-01
A23A6C1011	283-0197-00		CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A23A6C1012	283-0197-00		CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A23A6C1013	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A6C1014	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A23A6C1015	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A23A6C1016	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A6C1017	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A6C1018	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A23A6C2011	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A23A6C2012	283-0159-00		CAP,FXD,CER DI:18PF,5%,50V	04222	SR155A180JAA
A23A6C2013	283-0197-00		CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A23A6C2014	283-0197-00		CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A23A6C2015	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A23A6C2016	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A23A6C2017	283-0154-00		CAP,FXD,CER DI:22PF,5%,50V	04222	SR155A220JAA
A23A6CR1011	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A23A6CR1015	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A23A6CR2011	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A23A6CR2012	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A23A6CR2013	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A23A6CR2015	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A23A6L1014	108-0341-00		COIL,RF:FIXED,1.4UH	80009	108-0341-00
A23A6L1015	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A6L1018	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A6L1019	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A6L2011	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A6L2013	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A23A6L2014	108-0311-00		COIL,RF:FIXED,150NH	TK1345	108-0311-00
A23A6L2015	108-0341-00		COIL,RF:FIXED,1.4UH	80009	108-0341-00

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix		Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
	Part No.	Effective	Discont				
A23A6Q1011	151-0630-00				TRANSISTOR:NPN,SI,4 LEAD,CER PKG	S0545	NE02135
A23A6Q1012	151-0301-00				TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A23A6Q2015	151-0301-00				TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A23A6R1010	317-0472-00				RES,FXD,CMPSN:4.7K OHM,5%,0.125W	01121	BB4725
A23A6R1011	317-0056-00				RES,FXD,CMPSN:5.6 OHM,5%,0.125W	01121	BB56G5
A23A6R1012	317-0911-00				RES,FXD,CMPSN:910 OHM,5%,0.125W	01121	BB9115
A23A6R1013	317-0910-00				RES,FXD,CMPSN:91 OHM,5%,0.125W	01121	BB9105
A23A6R1014	317-0822-00				RES,FXD,CMPSN:8.2K OHM,5%,0.125W	01121	BB8225
A23A6R1015	317-0153-00				RES,FXD,CMPSN:15K OHM,5%,0.125W	01121	BB1535
A23A6R1016	317-0752-00				RES,FXD,CMPSN:7.5K OHM,5%,0.125W	01121	BB7525
A23A6R1017	317-0201-00				RES,FXD,CMPSN:200 OHM,5%,0.125W	01121	BB2015
A23A6R1018	317-0331-00				RES,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A23A6R1019	317-0203-00				RES,FXD,CMPSN:20K OHM,5%,0.125W	01121	BB2035
A23A6R2015	317-0181-00				RES,FXD,CMPSN:180 OHM,5%,0.125W	01121	BB1815
A23A7	670-6224-00				CIRCUIT BD ASSY:829MHZ,SECOND CONVERTER	80009	670-6224-00
A23A7C1011	283-0140-00				CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A7C1012	283-0140-00				CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A23A7C1013	283-0069-00				CAP,FXD,CER DI:15PF,20%,50V	04222	MA101A150KAA
A23A7C1014	283-0069-00				CAP,FXD,CER DI:15PF,20%,50V	04222	MA101A150KAA
A23A7CR1011	152-0322-00				SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,00-35	50434	5082-2672
A23A7CR1012	152-0322-00				SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,00-35	50434	5082-2672
A23A7L1011	108-0606-00				COIL,RF:FIXED,31NH	80009	108-0606-00
A23A7L1012	108-0606-00				COIL,RF:FIXED,31NH	80009	108-0606-00
A23A7L1013	108-0606-00				COIL,RF:FIXED,31NH	80009	108-0606-00
A23A7L1014	108-0606-00				COIL,RF:FIXED,31NH	80009	108-0606-00
A23A7R1012	317-0301-00				RES,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A23A7R1013	317-0360-00				RES,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A23A7R1014	317-0360-00				RES,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A23A7R1015	317-0301-00				RES,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A23A7T1011	120-1251-00				TRANSFORMER,RF:BALUN	80009	120-1251-00
A24	119-1010-02				HYBRID CKT ASSY:PHASE GATE DETECTOR	80009	119-1010-02
A24A1	670-5957-01				CIRCUIT BD ASSY:PHASE GATE INPUT	80009	670-5957-01
A24A1C243	290-0747-00				CAP,FXD,ELCTL:100UF,+50-20%,25WVDC	54473	ECE-B25V100L
A24A1C244	290-0747-00				CAP,FXD,ELCTL:100UF,+50-20%,25WVDC	54473	ECE-B25V100L
A24A1R243	315-0200-00				RES,FXD,FILM:20 OHM,5%,0.25W	19701	5043CX20R00J
A24A1R244	315-0200-00				RES,FXD,FILM:20 OHM,5%,0.25W	19701	5043CX20R00J
A25	119-1640-01				HARMONIC MIXER:	80009	119-1640-01
A25W252	175-8739-00				CA ASSY,SP,ELEC:3.26 AWG,3.0 L,RIBBON	TK1375	175-8739-00
A25A3	670-4376-01				CIRCUIT BD ASSY:HARMONIC MIXER INPUT	80009	670-4376-01
A25A3C243	290-0747-00				CAP,FXD,ELCTL:100UF,+50-20%,25WVDC	54473	ECE-B25V100L
A25A3C244	290-0747-00				CAP,FXD,ELCTL:100UF,+50-20%,25WVDC	54473	ECE-B25V100L
A25A3R243	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10R00J
A25A3R244	315-0100-00				RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10R00J
A26	672-0160-00				CIRCUIT BD ASSY:AUX SYNTHESIZER	80009	672-0160-00
A26A1	670-9163-00				CIRCUIT BD ASSY:AUX SYNTH	80009	670-9163-00
A26A1C1016	283-0220-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C1020	283-0109-00				CAP,FXD,CER DI:27PF,5%,1000V	59660	858-534COG0270J
A26A1C1021	283-0220-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C1023	283-0220-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C1024	283-0333-00				CAP,FXD,CER DI:35PF,5%,1000V	72982	838-534 A 350>
A26A1C1046	283-0024-00				CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C1055	283-0024-00				CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C1057	283-0024-00				CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C1066	283-0156-00				CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A26A1C1070	281-3165-00				CAP,VAR,AIR DI:0.8-10PF,250V	73899	MVM-010W
A26A1C2012	283-0024-00				CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C2013	283-0220-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C2019	283-0330-00				CAP,FXD,CER DI:100PF,5%,50V	05397	C320C101J5R5CA

Component No.	Tektronix	Serial/Assembly No.		Name & Description	Mfr.	Mfr. Part No.
	Part No.	Effective	Dscont		Code	
A26A1C2021	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C2022	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C2024	283-0156-00			CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A26A1C2040	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C2046	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C2047	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C2052	283-0156-00			CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A26A1C2053	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C2054	283-0156-00			CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A26A1C2055	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C2056	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C2059	283-0156-00			CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A26A1C2061	283-0156-00			CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A26A1C2065	283-0201-00			CAP,FXD,CER DI:27PF,10%,200V	04222	SR152C270KAA
A26A1C2066	283-0156-00			CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A26A1C2067	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C2068	283-0140-00			CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A26A1C2069	283-0108-00			CAP,FXD,CER DI:220PF,10%,200V	04222	SR152A221KAA
A26A1C2071	283-0201-00			CAP,FXD,CER DI:27PF,10%,200V	04222	SR152C270KAA
A26A1C2072	283-0140-00			CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A26A1C2073	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C2075	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C3012	283-0869-00			CAP,FXD,CER DI:68PF,NPO,100V,1%	16299	SR151A680JAA
A26A1C3016	283-0472-00			CAP,FXD,CER DI:102PF,1%,50V	05397	C320C102F565CA
A26A1C3018	283-0472-00			CAP,FXD,CER DI:102PF,1%,50V	05397	C320C102F565CA
A26A1C3022	283-0869-00			CAP,FXD,CER DI:68PF,NPO,100V,1%	16299	SR151A680JAA
A26A1C3032	285-0598-00			CAP,FXD,PLASTIC:0.01UF,5%,100V	19396	DU490B103J
A26A1C3035	285-0598-00			CAP,FXD,PLASTIC:0.01UF,5%,100V	19396	DU490B103J
A26A1C3046	283-0330-00			CAP,FXD,CER DI:100PF,5%,50V	05397	C320C101J5R5CA
A26A1C3047	283-0330-00			CAP,FXD,CER DI:100PF,5%,50V	05397	C320C101J5R5CA
A26A1C3050	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C3051	283-0156-00			CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A26A1C3052	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C3058	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C3066	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C3067	290-0804-00			CAP,FXD,ELCTLT:10UF,+50-20%,25V	55680	ULB1E100TAAANA
A26A1C3071	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C3074	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C4014	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C4017	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C4021	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C4026	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C4027	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C4032	285-0598-00			CAP,FXD,PLASTIC:0.01UF,5%,100V	19396	DU490B103J
A26A1C4035	285-0598-00			CAP,FXD,PLASTIC:0.01UF,5%,100V	19396	DU490B103J
A26A1C4037	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C4053	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C5015	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C5016	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C5017	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C5027	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A26A1C5052	290-0804-00			CAP,FXD,ELCTLT:10UF,+50-20%,25V	55680	ULB1E100TAAANA
A26A1C5056	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C5066	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C5067	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A26A1C5068	290-0804-00			CAP,FXD,ELCTLT:10UF,+50-20%,25V	55680	ULB1E100TAAANA
A26A1C5072	290-0804-00			CAP,FXD,ELCTLT:10UF,+50-20%,25V	55680	ULB1E100TAAANA
A26A1CR1065	152-0141-02			SEMICOND DVC,DI:5W,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A26A1CR2068	152-0650-00		SEMICON DVC,DI:VVC,30V,11.5PF,A276	50101	U11-4101
A26A1CR4070	152-0322-00		SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A26A1CR4077	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A26A1L1020	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A26A1L1074	108-1198-00		COIL,RF:FXD,14NH	7K1345	108-1198-00
A26A1L3014	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A26A1L3016	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A26A1L3020	108-0733-00		COIL,RF:FIXED,117NH	80009	108-0733-00
A26A1L5059	108-1199-00		COIL,RF:FXD,28UH,11%,TD-615	80009	108-1199-00
A26A1P1028	131-0265-00		CONN,RCPT,ELEC:MINTR,CKT BD MTD,MALE,RTANG	98291	051-053-0000
A26A1P1039	131-0265-00		CONN,RCPT,ELEC:MINTR,CKT BD MTD,MALE,RTANG	98291	051-053-0000
A26A1P1060	131-0265-00		CONN,RCPT,ELEC:MINTR,CKT BD MTD,MALE,RTANG	98291	051-053-0000
A26A1Q1015	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A26A1Q2049	151-0630-00		TRANSISTOR:NPN,SI,4 LEAD,CER PKG	50545	NE02135
A26A1Q2051	151-0301-00		TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A26A1Q2055	151-0301-00		TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A26A1Q2058	151-0752-00		TRANSISTOR:NPN,SI,MARCO T	25403	BFR96
A26A1Q2071	151-0719-00		TRANSISTOR:PMP,SI,TO-92B	04713	SPS8226 (MPSH81)
A26A1Q2076	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A26A1Q4014	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A26A1Q4016	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A26A1Q5027	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A26A1R1012	315-0621-00		RES,FXD,FILM:620 OHM,5%,0.25W	57668	NTR25J-E620E
A26A1R1017	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A26A1R1018	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A26A1R1021	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A26A1R1022	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A26A1R1045	315-0560-00		RES,FXD,FILM:56 OHM,5%,0.25W	57668	NTR25J-E56E0
A26A1R1047	315-0562-00		RES,FXD,FILM:5.6K OHM,5%,0.25W	57668	NTR25J-E05K6
A26A1R1049	315-0202-00		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A26A1R1051	315-0201-00		RES,FXD,FILM:200 OHM,5%,0.25W	57668	NTR25J-E200E
A26A1R1053	315-0562-00		RES,FXD,FILM:5.6K OHM,5%,0.25W	57668	NTR25J-E05K6
A26A1R1054	315-0132-00		RES,FXD,FILM:1.3K OHM,5%,0.25W	57668	NTR25J-E01K3
A26A1R1056	315-0680-00		RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A26A1R1057	315-0300-00		RES,FXD,FILM:30 OHM,5%,0.25W	19701	5043CX30R00J
A26A1R1066	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A26A1R1068	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A26A1R2013	315-0152-00		RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A26A1R2016	317-0512-00		RES,FXD,CMPSN:5.1K OHM,5%,0.125	01121	BB5125
A26A1R2017	317-0180-00		RES,FXD,CMPSN:18 OHM,5%,0.125W	01121	BB1805
A26A1R2022	317-0180-00		RES,FXD,CMPSN:18 OHM,5%,0.125W	01121	BB1805
A26A1R2023	317-0180-00		RES,FXD,CMPSN:18 OHM,5%,0.125W	01121	BB1805
A26A1R2024	315-0510-00		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A26A1R2025	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A26A1R2031	321-0184-00		RES,FXD,FILM:806 OHM,1%,0.125W,TC=TO	19701	5033ED806ROF
A26A1R2032	321-0184-00		RES,FXD,FILM:806 OHM,1%,0.125W,TC=TO	19701	5033ED806ROF
A26A1R2044	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A26A1R2047	317-0332-00		RES,FXD,CMPSN:3.3K OHM,5%,0.125W	01121	BB3325
A26A1R2049	317-0100-00		RES,FXD,CMPSN:10 OHM,5%,0.125W	01121	BB1005
A26A1R2050	317-0201-00		RES,FXD,CMPSN:200 OHM,5%,0.125W	01121	BB2015
A26A1R2051	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A26A1R2056	317-0332-00		RES,FXD,CMPSN:3.3K OHM,5%,0.125W	01121	BB3325
A26A1R2057	317-0047-00		RES,FXD,CMPSN:4.7 OHM,5%,0.125W	01121	BB47G5
A26A1R2058	317-0511-00		RES,FXD,CMPSN:510 OHM,5%,0.125W	01121	BB5115
A26A1R2060	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A26A1R2065	317-0330-00		RES,FXD,CMPSN:33 OHM,5%,0.125W	01121	BB3305
A26A1R2068	317-0332-00		RES,FXD,CMPSN:3.3K OHM,5%,0.125W	01121	BB3325
A26A1R2071	317-0102-00		RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A26A1R2072	317-0911-00		RES,FXD,CMPNS:910 OHM,5%,0.125W	01121	BB9115
A26A1R2074	317-0332-00		RES,FXD,CMPNS:3.3K OHM,5%,0.125W	01121	BB3325
A26A1R2075	317-0472-00		RES,FXD,CMPNS:4.7K OHM,5%,0.125W	01121	BB4725
A26A1R2076	317-0103-00		RES,FXD,CMPNS:10K OHM,5%,0.125W	01121	BB1035
A26A1R3022	315-0471-00		RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A26A1R3037	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10R00J
A26A1R3038	315-0154-00		RES,FXD,FILM:150K OHM,5%,0.25W	57668	NTR25J-E150K
A26A1R3041	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=TO	07716	CEAD12401F
A26A1R3042	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=TO	07716	CEAD12401F
A26A1R3043	321-0315-00		RES,FXD,FILM:18.7K OHM,1%,0.125W,TC=TO	19701	5043ED18K70F
A26A1R3044	321-0315-00		RES,FXD,FILM:18.7K OHM,1%,0.125W,TC=TO	19701	5043ED18K70F
A26A1R3045	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=TO	07716	CEAD12401F
A26A1R3046	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=TO	07716	CEAD12401F
A26A1R3050	315-0510-00		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A26A1R3055	317-0470-00		RES,FXD,CMPNS:47 OHM,5%,0.125W	01121	BB4705
A26A1R3057	317-0470-00		RES,FXD,CMPNS:47 OHM,5%,0.125W	01121	BB4705
A26A1R3058	317-0470-00		RES,FXD,CMPNS:47 OHM,5%,0.125W	01121	BB4705
A26A1R3065	317-0331-00		RES,FXD,CMPNS:330 OHM,5%,0.125W	01121	BB3315
A26A1R3070	315-0202-00		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A26A1R3071	317-0101-00		RES,FXD,CMPNS:100 OHM,5%,0.125W	01121	BB1015
A26A1R3076	317-0472-00		RES,FXD,CMPNS:4.7K OHM,5%,0.125W	01121	BB4725
A26A1R4015	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A26A1R4016	315-0132-00		RES,FXD,FILM:1.3K OHM,5%,0.25W	57668	NTR25J-E01K3
A26A1R4023	315-0271-00		RES,FXD,FILM:270 OHM,5%,0.25W	57668	NTR25J-E270E
A26A1R4024	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A26A1R4027	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A26A1R4038	315-0154-00		RES,FXD,FILM:150K OHM,5%,0.25W	57668	NTR25J-E150K
A26A1R4040	315-0154-00		RES,FXD,FILM:150K OHM,5%,0.25W	57668	NTR25J-E150K
A26A1R4047	315-0154-00		RES,FXD,FILM:150K OHM,5%,0.25W	57668	NTR25J-E150K
A26A1R4049	315-0154-00		RES,FXD,FILM:150K OHM,5%,0.25W	57668	NTR25J-E150K
A26A1R4052	321-0756-00		RES,FXD,FILM:50K OHM,1%,0.125W,TC=TO	24546	NA55D5002F
A26A1R4073	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A26A1R5016	317-0160-00		RES,FXD,CMPNS:16 OHM,5%,0.125W	01121	BB1605
A26A1R5017	317-0160-00		RES,FXD,CMPNS:16 OHM,5%,0.125W	01121	BB1605
A26A1R5020	315-0510-00		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A26A1R5021	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A26A1R5023	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A26A1R5024	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A26A1R5025	315-0223-00		RES,FXD,FILM:22K OHM,5%,0.25W	19701	5043CX22K00J92U
A26A1R5038	315-0154-00		RES,FXD,FILM:150K OHM,5%,0.25W	57668	NTR25J-E150K
A26A1R5039	315-0154-00		RES,FXD,FILM:150K OHM,5%,0.25W	57668	NTR25J-E150K
A26A1R5072	307-0108-00		RES,FXD,CMPNS:6.8 OHM,5%,0.25W	01121	CB68G5
A26A1T4014	120-1509-00		TRANSFORMER,RF:TOROID,257NH TD-419	80009	120-1509-00
A26A1T5022	120-1510-00		TRANSFORMER,RF:TOROID,35.5NH,30% TD-420	80009	120-1510-00
A26A1U2017	156-1248-00		MICROCKT,DGTL:ECL,PRESCALER/DIVIDE BY 100	52648	SP8629
A26A1U2040	156-1272-00		MICROCKT,LINEAR:DUAL OPERATIONAL AMPLIFIER	80009	156-1272-00
A26A1U3051	156-1862-00		MICROCKT,DGTL:VAR MODULUS DIVIDER 32/33	04713	MC12015(PD/LD)
A26A1U3059	156-0469-02		MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A26A1U4021	156-1709-00		MICROCKT,LINEAR:IF AMPLIFIER	04713	MC1350P
A26A1U4041	156-1742-00		MICROCKT,LINEAR:CMOS,PLL FREQ SYNTH,	04713	MC145146L
A26A1U4066	156-0058-02		MICROCKT,DGTL:HEX INV,SCRN	80009	156-0058-02
A26A1U4074	156-0388-03		MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	80009	156-0388-03
A26A1U5015	156-1248-00		MICROCKT,DGTL:ECL,PRESCALER/DIVIDE BY 100	52648	SP8629
A26A1U5073	156-0277-01		MICROCKT,LINEAR:VOLTAGE RGLTR,POS 5V,SCRN	04713	MC7805CTD
A28	670-7920-01		CIRCUIT BD ASSY:MAIN MOTHER	80009	670-7920-01
A30	621-0023-00		POWER SUPPLY: (492B ONLY)	80009	621-0023-00
A30	621-0024-00		POWER SUPPLY:	80009	621-0024-00

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A30	621-0030-00		(492BP ONLY) POWER SUPPLY:	80009	621-0030-00
A30	621-0031-00		(492B OPTION 42 ONLY) POWER SUPPLY:	80009	621-0031-00
A30B100	119-0830-01		(492BP OPTION 42 ONLY) FAN, TUBEAXIAL: 12VDC, 2.4W, 5250 RPM, 31 CFM	TK0146	MODEL 69.11.53
A30C200	290-0845-00		CAP, FXD, ELCTLT: 330UF, +50-10%, 25V (OPTION 42 ONLY)	54473	ECE-A25V330L
A30CR1	152-0141-02		SEMICOND DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35 (OPTION 42 ONLY)	03508	DA2527 (1N4152)
A30F301	159-0017-00		FUSE, CARTRIDGE: 3AG, 4A, 250V, FAST BLOW	71400	MTH-CW-4
A30FL301	119-1306-00		FILTER, RFI: 6A, 250V, 50-400HZ	56289	6JX5431A
A30FL302	119-1390-00		FILTER, RFI: POT CORE SET	80009	119-1390-00
A30R1	315-0471-00		RES, FXD, FILM: 470 OHM, 5%, 0.25W (OPTION 42 ONLY)	57668	NTR25J-E470E
A30R301	301-0514-01		RES, FXD, CMPSN: 510K OHM, 5%, 0.5W	01121	EB5145
A30S300	260-1931-00		SWITCH, SENS: SPST NO, 10(4)A, 250V	TK0935	1005.0925
A30S301	260-1931-00		SWITCH, SENS: SPST NO, 10(4)A, 250V	TK0935	1005.0925
A30S302	260-1967-00		SWITCH, SLIDE: DPDT 5A/250V 10A/125V MKD	TK0935	4021.0512
A30U301	119-1168-00		CAPACITOR-RES: 0.1UF, 20% & 22 OHM, 10%, 250VAC	14752	RG1782-1
A30W192	175-9621-00		CABLE ASSY, RF: 50 OHM COAX, 23.5 L (OPTION 42 ONLY)	80009	175-9621-00
A30W301	175-1703-00		LEAD, ELECTRICAL: 22 AWG, 22.5 L	80009	175-1703-00
A30W301	175-7603-00		CABLE ASSY, RF: 50 OHM COAX, 6.10 L	80009	175-7603-00
A30W560	174-0447-00		CA ASSY, SP, ELEC: 26, 26AWG, 22.0 L, RIBBON	80009	174-0447-00
A30W620	175-3619-01		CABLE ASSY, RF: 50 OHM COAX, 16.0 L, SEMI-RGD	80009	175-3619-01
A30W1011	175-2480-00		CA ASSY, SP, ELEC: 2.26 AWG, 11.0 L, RIBBON (492BP ONLY)	TK1375	175-2480-00
A30W1021	175-9618-00		CABLE ASSY, RF: 50 OHM COAX, 11.0 L, 9-5 (OPTION 42 ONLY)	80009	175-9618-00
A30W3045	175-3557-00		CA ASSY, SP, ELEC: 5.26 AWG, 18.0 L, RIBBON	TK1375	175-3557-00
A30A1	670-8036-04		CIRCUIT BD ASSY: PWR SPLY	80009	670-8036-04
A30A1C1055	290-0758-00		CAP, FXD, ELCTLT: 2.2UF, +50-10%, 200V	56289	502D227
A30A1C1063	285-1089-00		CAP, FXD, PLASTIC: 0.04UF, 5%, 900V	50558	PA6-0787J
A30A1C1095	285-1196-00		CAP, FXD, PPR DI: 0.01UF, 20%, 250V	TK0515	PME 265 MB 510
A30A1C2024	283-0330-00		CAP, FXD, CER DI: 100PF, 5%, 50V	05397	C320C101J5R5CA
A30A1C2030	283-0238-00		CAP, FXD, CER DI: 0.01UF, 10%, 50V	04222	SR205C103KAA
A30A1C2032	283-0330-00		CAP, FXD, CER DI: 100PF, 5%, 50V	05397	C320C101J5R5CA
A30A1C2033	283-0486-00		CAP, FXD, CER DI: 1.0UF, 10%, 50V	04222	SR405105K
A30A1C2034	283-0330-00		CAP, FXD, CER DI: 100PF, 5%, 50V	05397	C320C101J5R5CA
A30A1C2035	283-0156-00		CAP, FXD, CER DI: 1000PF, +80-20%, 200V	04222	SR152E10Z2AA
A30A1C2041	290-0758-00		CAP, FXD, ELCTLT: 2.2UF, +50-10%, 200V	56289	502D227
A30A1C2043	290-1034-00		CAP, FXD, ELCTLT: 330UF, 25V, 20%	TK1424	CEUFM1E331
A30A1C2045	290-0758-00		CAP, FXD, ELCTLT: 2.2UF, +50-10%, 200V	56289	502D227
A30A1C2053	290-0758-00		CAP, FXD, ELCTLT: 2.2UF, +50-10%, 200V	56289	502D227
A30A1C2057	290-0758-00		CAP, FXD, ELCTLT: 2.2UF, +50-10%, 200V	56289	502D227
A30A1C2096	285-1196-00		CAP, FXD, PPR DI: 0.01UF, 20%, 250V	TK0515	PME 265 MB 510
A30A1C3031	283-0330-00		CAP, FXD, CER DI: 100PF, 5%, 50V	05397	C320C101J5R5CA
A30A1C3033	283-0486-00		CAP, FXD, CER DI: 1.0UF, 10%, 50V	04222	SR405105K
A30A1C3034	283-0330-00		CAP, FXD, CER DI: 100PF, 5%, 50V	05397	C320C101J5R5CA
A30A1C3035	283-0330-00		CAP, FXD, CER DI: 100PF, 5%, 50V	05397	C320C101J5R5CA
A30A1C3036	283-0486-00		CAP, FXD, CER DI: 1.0UF, 10%, 50V	04222	SR405105K
A30A1C3037	283-0486-00		CAP, FXD, CER DI: 1.0UF, 10%, 50V	04222	SR405105K
A30A1C3041	290-0770-00		CAP, FXD, ELCTLT: 100UF, +50-20%, 25VDC	54473	ECE-A25V100L
A30A1C3051	290-0771-00		CAP, FXD, ELCTLT: 220UF, +50-10%, 10VDC	55680	ULA1A221TPA2
A30A1C3057	290-0852-00		CAP, FXD, ELCTLT: 1UF, +75-10%, 350V	TK1424	CE04W2V010A
A30A1C3064	285-1196-00		CAP, FXD, PPR DI: 0.01UF, 20%, 250V	TK0515	PME 265 MB 510
A30A1C3071	285-0981-00		CAP, FXD, PLASTIC: 2UF, 10%, 400V	80009	285-0981-00
A30A1C3074	285-1040-00		CAP, FXD, PLASTIC: 1200PF, 10%, 4000V	04099	TEK-17A

Component No.	Tektronix		Serial/Assembly No. Effective Dscont	Name & Description	Mfr.	
	Part No.				Code	Mfr. Part No.
A30A1C4012	290-0745-00			CAP,FXD,ELCTLT:22UF,+50-20%,25WVDC	54473	ECE-A25V22L
A30A1C4014	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A30A1C4015	283-0211-00			CAP,FXD,CER DI:0.1UF,10%,200V	04222	SR406C104KAA
A30A1C4016	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A30A1C4022	290-0745-00			CAP,FXD,ELCTLT:22UF,+50-20%,25WVDC	54473	ECE-A25V22L
A30A1C4023	290-0942-00			CAP,FXD,ELCTLT:100UF,+100-10%,25V	55680	UPA1E101MAH
A30A1C4024	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A30A1C4032	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A30A1C4033	290-0770-00			CAP,FXD,ELCTLT:100UF,+50-20%,25VDC	54473	ECE-A25V100L
A30A1C4035	290-0745-00			CAP,FXD,ELCTLT:22UF,+50-20%,25WVDC	54473	ECE-A25V22L
A30A1C4036	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A30A1C4044	290-1034-00			CAP,FXD,ELCTLT:330UF,25V,20%	TK1424	CEUFM1E331
A30A1C4046	290-1034-00			CAP,FXD,ELCTLT:330UF,25V,20%	TK1424	CEUFM1E331
A30A1C4051	290-1034-00			CAP,FXD,ELCTLT:330UF,25V,20%	TK1424	CEUFM1E331
A30A1C4055	290-1034-00			CAP,FXD,ELCTLT:330UF,25V,20%	TK1424	CEUFM1E331
A30A1C4082	283-0263-00			CAP,FXD,CER DI:2200PF,20%,3000V	59660	828556Y5R0222M
A30A1C5010	283-0008-00			CAP,FXD,CER DI:0.1UF,20%,500V	04222	SR507C104MAA
A30A1C5012	290-0758-00			CAP,FXD,ELCTLT:2.2UF,+50-10%,200V	56289	502D227
A30A1C5017	283-0486-00			CAP,FXD,CER DI:1.0UF,10%,50V	04222	SR405105K
A30A1C5018	290-1034-00			CAP,FXD,ELCTLT:330UF,25V,20%	TK1424	CEUFM1E331
A30A1C5021	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A30A1C5022	290-0745-00			CAP,FXD,ELCTLT:22UF,+50-20%,25WVDC	54473	ECE-A25V22L
A30A1C5038	285-0699-00			CAP,FXD,PLASTIC:0.0047UF,10%,100V	80009	285-0699-00
A30A1C5051	290-1034-00			CAP,FXD,ELCTLT:330UF,25V,20%	TK1424	CEUFM1E331
A30A1C5054	290-1034-00			CAP,FXD,ELCTLT:330UF,25V,20%	TK1424	CEUFM1E331
A30A1C5071	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A30A1C5072	290-0804-00			CAP,FXD,ELCTLT:10UF,+50-20%,25V	55680	ULB1E100TAAANA
A30A1C5082	283-0263-00			CAP,FXD,CER DI:2200PF,20%,3000V	59660	828556Y5R0222M
A30A1C5084	290-0114-00			CAP,FXD,ELCTLT:47UF,20%,6V	05397	T110B476M006AS
A30A1C5085	290-0114-00			CAP,FXD,ELCTLT:47UF,20%,6V	05397	T110B476M006AS
A30A1C5113	283-0211-00			CAP,FXD,CER DI:0.1UF,10%,200V	04222	SR406C104KAA
A30A1C6010	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A30A1C6019	283-0486-00			CAP,FXD,CER DI:1.0UF,10%,50V	04222	SR405105K
A30A1C6025	290-0523-00			CAP,FXD,ELCTLT:2.2UF,20%,20V	05397	T368A225M020AS
A30A1C6033	283-0486-00			CAP,FXD,CER DI:1.0UF,10%,50V	04222	SR405105K
A30A1C6039	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A30A1C6048	285-1301-00			CAP,FXD,PLASTIC:0.47UF,10%,63V	55112	168/0.47/K/50/E
A30A1C6053	285-1301-00			CAP,FXD,PLASTIC:0.47UF,10%,63V	55112	168/0.47/K/50/E
A30A1C6055	283-0620-00			CAP,FXD,MICA DI:470PF,1%,500V	00853	D155F471F0
A30A1C6058	283-0620-00			CAP,FXD,MICA DI:470PF,1%,500V	00853	D155F471F0
A30A1C6059	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A30A1C6062	285-1301-00			CAP,FXD,PLASTIC:0.47UF,10%,63V	55112	168/0.47/K/50/E
A30A1C6068	285-1301-00			CAP,FXD,PLASTIC:0.47UF,10%,63V	55112	168/0.47/K/50/E
A30A1C6069	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A30A1C6071	283-0067-00			CAP,FXD,CER DI:0.001UF,10%,200V	59660	835-515-YSE0102K
A30A1C6072	283-0067-00			CAP,FXD,CER DI:0.001UF,10%,200V	59660	835-515-YSE0102K
A30A1C6101	290-0829-00			CAP,FXD,ELCTLT:750UF,+100-10%,200V	90201	PPF751SR2J3P2
A30A1C6111	290-0829-00			CAP,FXD,ELCTLT:750UF,+100-10%,200V	90201	PPF751SR2J3P2
A30A1CR1022	152-0400-00			SEMICON DVC,DI:RECT,SI,400V,1A	04713	1N4936RL
A30A1CR1034	152-0400-00			SEMICON DVC,DI:RECT,SI,400V,1A	04713	1N4936RL
A30A1CR1042	152-0400-00			SEMICON DVC,DI:RECT,SI,400V,1A	04713	1N4936RL
A30A1CR2027	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR2028	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR2035	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR2061	152-0661-00			SEMICON DVC,DI:RECT,SI,600V,3A	04713	SR3523
A30A1CR2063	152-0661-00			SEMICON DVC,DI:RECT,SI,600V,3A	04713	SR3523
A30A1CR2065	152-0661-00			SEMICON DVC,DI:RECT,SI,600V,3A	04713	SR3523
A30A1CR2079	152-0661-00			SEMICON DVC,DI:RECT,SI,600V,3A	04713	SR3523

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A30A1CR3027	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR3028	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR3035	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR3052	152-0400-00		SEMICON DVC,DI:RECT,SI,400V,1A	04713	1N4936RL
A30A1CR3053	152-0400-00		SEMICON DVC,DI:RECT,SI,400V,1A	04713	1N4936RL
A30A1CR3054	152-0400-00		SEMICON DVC,DI:RECT,SI,400V,1A	04713	1N4936RL
A30A1CR3055	152-0400-00		SEMICON DVC,DI:RECT,SI,400V,1A	04713	1N4936RL
A30A1CR3056	152-0400-00		SEMICON DVC,DI:RECT,SI,400V,1A	04713	1N4936RL
A30A1CR3096	152-0661-00		SEMICON DVC,DI:RECT,SI,600V,3A	04713	SR3523
A30A1CR3098	152-0661-00		SEMICON DVC,DI:RECT,SI,600V,3A	04713	SR3523
A30A1CR4021	152-0066-00		SEMICON DVC,DI:RECT,SI,400V,1A,DO-41	05828	GP10G-020
A30A1CR4034	152-0066-00		SEMICON DVC,DI:RECT,SI,400V,1A,DO-41	05828	GP10G-020
A30A1CR4037	152-0066-00		SEMICON DVC,DI:RECT,SI,400V,1A,DO-41	05828	GP10G-020
A30A1CR4053	152-0640-00		SEMICON DVC,DI:RECT,SI,35V,30A,DO-4	01281	SD-4101
A30A1CR4057	152-0640-00		SEMICON DVC,DI:RECT,SI,35V,30A,DO-4	01281	SD-4101
A30A1CR4061	152-0720-00		SEMICON DVC,DI:RECT,SI,100V,8A,25NS,TO-220 ,BYW29-100	25403	BYW29-100
A30A1CR4062	152-0720-00		SEMICON DVC,DI:RECT,SI,100V,8A,25NS,TO-220 ,BYW29-100	25403	BYW29-100
A30A1CR4063	152-0720-00		SEMICON DVC,DI:RECT,SI,100V,8A,25NS,TO-220 ,BYW29-100	25403	BYW29-100
A30A1CR4065	152-0720-00		SEMICON DVC,DI:RECT,SI,100V,8A,25NS,TO-220 ,BYW29-100	25403	BYW29-100
A30A1CR4094	152-0661-00		SEMICON DVC,DI:RECT,SI,600V,3A	04713	SR3523
A30A1CR4095	152-0661-00		SEMICON DVC,DI:RECT,SI,600V,3A	04713	SR3523
A30A1CR5031	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR5052	152-0721-00		SEMICON DVC,DI:RECT,SI,100V,12A,DO-4	12969	UTG5206
A30A1CR5055	152-0742-00		SEMICON DVC,DI:RECT,SI,12A,100V,DO-4	28480	5082-0008
A30A1CR5062	152-0721-00		SEMICON DVC,DI:RECT,SI,100V,12A,DO-4	12969	UTG5206
A30A1CR5065	152-0742-00		SEMICON DVC,DI:RECT,SI,12A,100V,DO-4	28480	5082-0008
A30A1CR6014	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR6015	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR6016	152-0066-00		SEMICON DVC,DI:RECT,SI,400V,1A,DO-41	05828	GP10G-020
A30A1CR6018	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR6047	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR6049	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR6052	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR6053	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR6055	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR6061	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR6071	152-0400-00		SEMICON DVC,DI:RECT,SI,400V,1A	04713	1N4936RL
A30A1CR6072	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1CR6073	152-0400-00		SEMICON DVC,DI:RECT,SI,400V,1A	04713	1N4936RL
A30A1CR6074	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A30A1DS5112	150-0035-00		LAMP,GLOW:90V MAX,0.3MA,AID-T,WIRE LD	TK0213	JH005/3011JA
A30A1E1094	119-0181-00		ARSR,ELEC SURGE:230,GAS FILLED	25088	B1-A230
A30A1E2095	119-0181-00		ARSR,ELEC SURGE:230,GAS FILLED	25088	B1-A230
A30A1F1013	159-0025-00		FUSE,CARTRIDGE:3AG,0.5A,250V,0.25SEC	71400	AGC-CW-1/2
A30A1F1017	159-0021-00		FUSE,CARTRIDGE:3AG,2A,250V,FAST BLOW	71400	AGC-CW-2
A30A1F1033	159-0213-00		FUSE,CARTRIDGE:0.062A,250V,FAST BLOW	71400	1/16A
A30A1F1035	159-0028-00		FUSE,CARTRIDGE:0.25A,250V,FAST BLOW	71400	AGC-1/4
A30A1F2013	159-0021-00		FUSE,CARTRIDGE:3AG,2A,250V,FAST BLOW	71400	AGC-CW-2
A30A1F3038	159-0128-00		FUSE,WIRE LEAD:2A,125V,5 SEC AXIAL LEADS	75915	273002
A30A1J5041	131-2324-00		CONN,RCPT,ELEC:CKT BD,20/40 CONT,FEMALE	31781	307-040-526-300
A30A1L1051	108-0960-00		COIL,RF:FIXED,3.9MH	80009	108-0960-00
A30A1L1081	108-1052-00		COIL,RF:FIXED,580UH	80009	108-1052-00
A30A1L2048	108-0959-00		COIL,RF:FIXED,150UH	TK1345	108-0959-00
A30A1L3012	108-0795-00		COIL,RF:FIXED,2MH	TK1345	108-0795-00



Component No.	Tektronix		Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
	Part No.					
A30A1L3043	108-0959-00			COIL,RF:FIXED,150UH	TK1345	108-0959-00
A30A1L3047	108-0958-00			COIL,RF:FIXED,50UH	80009	108-0958-00
A30A1L3088	108-0961-00			COIL,RF:FIXED,140NH	80009	108-0961-00
A30A1L4042	108-0958-00			COIL,RF:FIXED,50UH	80009	108-0958-00
A30A1Q2021	151-0625-00			TRANSISTOR:P,NP,SI,TO-220	80009	151-0625-00
A30A1Q2023	151-0710-00			TRANSISTOR:NPN,SI,TO-92 PLUS	04713	MPSW01A
A30A1Q2024	151-0625-00			TRANSISTOR:P,NP,SI,TO-220	80009	151-0625-00
A30A1Q2031	151-0302-00			TRANSISTOR:NPN,SI,TO-18	04713	ST899
A30A1Q2061	151-0703-00			TRANSISTOR:NPN,SI,TO-61	80009	151-0703-00
A30A1Q2071	151-0703-00			TRANSISTOR:NPN,SI,TO-61	80009	151-0703-00
A30A1Q3022	151-0625-00			TRANSISTOR:P,NP,SI,TO-220	80009	151-0625-00
A30A1Q3023	151-0301-00			TRANSISTOR:P,NP,SI,TO-18	80009	151-0301-00
A30A1Q5013	151-0622-00			TRANSISTOR:P,NP,SI,40V,1A,TO-226AE/237	04713	SPS8956(MPSW51A)
A30A1Q5023	151-0302-00			TRANSISTOR:NPN,SI,TO-18	04713	ST899
A30A1Q5032	151-0301-00			TRANSISTOR:P,NP,SI,TO-18	80009	151-0301-00
A30A1Q6034	151-0302-00			TRANSISTOR:NPN,SI,TO-18	04713	ST899
A30A1Q6077	151-0444-00			TRANSISTOR:NPN,SI,TO-92	04713	SPS797
A30A1Q6078	151-0444-00			TRANSISTOR:NPN,SI,TO-92	04713	SPS797
A30A1R2015	308-0643-00			RES,FXD,WW:0.10 OHM,3%,3W	14193	SA31 R100H
A30A1R2017	308-0680-00			RES,FXD,WW:0.045 OHM,10%,3W	00213	1240S-.045-10
A30A1R2022	315-0562-00			RES,FXD,FILM:5.6K OHM,5%,0.25W	57668	NTR25J-E05K6
A30A1R2025	315-0122-00			RES,FXD,FILM:1.2K OHM,5%,0.25W	57668	NTR25J-E01K2
A30A1R2026	321-0399-00			RES,FXD,FILM:140K OHM,1%,0.125W,TC=TO	07716	CEAD14002F
A30A1R2030	315-0242-00			RES,FXD,FILM:2.4K OHM,5%,0.25W	57668	NTR25J-E02K4
A30A1R2031	307-0106-00			RES,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB 47G5
A30A1R2032	321-0193-00			RES,FXD,FILM:1K OHM,1%,0.125W,TC=TO	19701	5033ED1K00F
A30A1R2034	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A30A1R2035	315-0621-00			RES,FXD,FILM:620 OHM,5%,0.25W	57668	NTR25J-E620E
A30A1R2036	321-0289-07			RES,FXD,FILM:10.0K OHM,0.1%,0.125W,TC=T9	19701	5033RE10K00B
A30A1R2037	321-0318-07			RES,FXD,FILM:20.0K OHM,0.1%,0.125W,TC=T9	19701	5033RE20K00BCM
A30A1R2038	321-0381-00			RES,FXD,FILM:90.9K OHM,1%,0.125W,TC=TO	07716	CEAD09091F
A30A1R2039	321-0347-00			RES,FXD,FILM:40.2K OHM,1%,0.125W,TC=TO	91637	CMF55116G40201F
A30A1R2057	315-0105-00			RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A30A1R2073	315-0105-00			RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A30A1R3019	308-0463-00			RES,FXD,WW:0.3 OHM,1%,3W	14193	SA31-R300F
A30A1R3021	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A30A1R3022	307-0106-00			RES,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB 47G5
A30A1R3023	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A30A1R3024	301-0102-00			RES,FXD,CMPSN:1K OHM,5%,0.50W	19701	5053CX1K000J
A30A1R3025	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A30A1R3026	315-0271-00			RES,FXD,FILM:270 OHM,5%,0.25W	57668	NTR25J-E270E
A30A1R3029	307-0106-00			RES,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB 47G5
A30A1R3031	321-0377-00			RES,FXD,FILM:82.5K OHM,1%,0.125W,TC=TO	07716	CEAD082501F
A30A1R3032	321-0193-00			RES,FXD,FILM:1K OHM,1%,0.125W,TC=TO	19701	5033ED1K00F
A30A1R3033	307-0106-00			RES,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB 47G5
A30A1R3034	321-0367-00			RES,FXD,FILM:64.9K OHM,1%,0.125W,TC=TO	07716	CEAD64901F
A30A1R3036	321-0193-00			RES,FXD,FILM:1K OHM,1%,0.125W,TC=TO	19701	5033ED1K00F
A30A1R3037	321-0604-00			RES,FXD,FILM:30K OHM,0.25%,0.125W,TC=T2	19701	5033RC30K00C
A30A1R3038	321-0353-00			RES,FXD,FILM:46.4K OHM,1%,0.125W,TC=TO	07716	CEAD46401F
A30A1R3039	321-0289-03			RES,FXD,FILM:10.0K OHM,0.25%,0.125W,TC=TO	07716	CEAC10001C
A30A1R3084	303-0271-00			RES,FXD,CMPSN:270 OHM,5%,1W	01121	GB2715
A30A1R3088	301-0823-00			RES,FXD,FILM:82K OHM,5%,0.5W	19701	5053CX82K00J
A30A1R4017	301-0823-00			RES,FXD,FILM:82K OHM,5%,0.5W	19701	5053CX82K00J
A30A1R4018	301-0165-00			RES,FXD,FILM:1.6M OHM,5%,0.5W	57668	TR50J-E 1M6
A30A1R4031	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A30A1R4083	315-0471-00			RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A30A1R4092	308-0054-00			RES,FXD,WW:10K OHM,5%,5W	00213	1550S-10000-5
A30A1R5014	321-0193-00			RES,FXD,FILM:1K OHM,1%,0.125W,TC=TO	19701	5033ED1K00F

Replaceable Electrical Parts  
492B/492BP Service Vol. 2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A30A1R5015	321-0385-00			RES, FXD, FILM: 100K OHM, 1%, 0.125W, TC=TO	19701	5033ED100K0F
A30A1R5016	307-0103-00			RES, FXD, CMPSN: 2.7 OHM, 5%, 0.25W	01121	CB27G5
A30A1R5019	315-0362-00			RES, FXD, FILM: 3.6K OHM, 5%, 0.25W	19701	5043CX3K600J
A30A1R5033	315-0182-00			RES, FXD, FILM: 1.8K OHM, 5%, 0.25W	57668	NTR25J-E1K8
A30A1R5034	315-0222-00			RES, FXD, FILM: 2.2K OHM, 5%, 0.25W	57668	NTR25J-E02K2
A30A1R5035	315-0622-00			RES, FXD, FILM: 6.2K OHM, 5%, 0.25W	19701	5043CX6K200J
A30A1R5036	321-0381-00			RES, FXD, FILM: 90.9K OHM, 1%, 0.125W, TC=TO	07716	CEAD90901F
A30A1R5039	301-0102-00			RES, FXD, CMPSN: 1K OHM, 5%, 0.50W	19701	5053CX1K000J
A30A1R5042	315-0512-00			RES, FXD, FILM: 5.1K OHM, 5%, 0.25W	57668	NTR25J-E05K1
A30A1R5042	315-0332-00			RES, FXD, FILM: 3.3K OHM, 5%, 0.25W	57668	NTR25J-E03K3
A30A1R5043	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A30A1R5047	321-0373-00			RES, FXD, FILM: 75.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED75K00F
A30A1R5083	307-0023-00			RES, FXD, CMPSN: 4.7 OHM, 10%, 0.5W	01121	EB47G1
A30A1R5086	307-0023-00			RES, FXD, CMPSN: 4.7 OHM, 10%, 0.5W	01121	EB47G1
A30A1R5087	308-0154-00			RES, FXD, WW: 25K OHM, 5%, 10W	44655	10EX25K00JQ54
A30A1R5111	301-0565-00			RES, FXD, FILM: 5.6M OHM, 5%, 0.05W	01121	EB5655
A30A1R6011	321-0289-00			RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=TO	19701	5033ED10K0F
A30A1R6013	307-0106-00			RES, FXD, CMPSN: 4.7 OHM, 5%, 0.25W	01121	CB 47G5
A30A1R6017	307-0106-00			RES, FXD, CMPSN: 4.7 OHM, 5%, 0.25W	01121	CB 47G5
A30A1R6019	321-0289-03			RES, FXD, FILM: 10.0K OHM, 0.25%, 0.125W, TC=T2	07716	CEAC10001C
A30A1R6020	321-0183-00			RES, FXD, FILM: 787 OHM, 1%, 0.125W, TC=TO	07716	CEAD787R0F
A30A1R6021	315-0361-00			RES, FXD, FILM: 360 OHM, 5%, 0.25W	19701	5043CX360R0J
A30A1R6022	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A30A1R6023	321-0227-00			RES, FXD, FILM: 2.26K OHM, 1%, 0.125W, TC=TO	01121	RNK2261F
A30A1R6024	321-0289-03			RES, FXD, FILM: 10.0K OHM, 0.25%, 0.125W, TC=T2	07716	CEAC10001C
A30A1R6028	311-1489-00			RES, VAR, NONWW: 500 OHM, 10%, 0.75W	02111	43P501T672
A30A1R6029	321-0114-00			RES, FXD, FILM: 150 OHM, 1%, 0.125 W, TC=TO	19701	5033ED150R0F
A30A1R6032	321-0317-00			RES, FXD, FILM: 19.6K OHM, 1%, 0.125W, TC=TO	07716	CEAD19601F
A30A1R6033	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A30A1R6035	315-0105-00			RES, FXD, FILM: 1M OHM, 5%, 0.25W	19701	5043CX1M000J
A30A1R6037	321-0816-00			RES, FXD, FILM: 5K OHM, 1%, 0.125W, TC=TO	24546	NA55D5001F
A30A1R6038	321-0299-00			RES, FXD, FILM: 12.7K OHM, 1%, 0.125W, TC=TO	19701	5033ED12K70F
A30A1R6040	315-0302-00			RES, FXD, FILM: 3K OHM, 5%, 0.25W	57668	NTR25J-E03K0
A30A1R6041	315-0512-00			RES, FXD, FILM: 5.1K OHM, 5%, 0.25W	57668	NTR25J-E05K1
A30A1R6045	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A30A1R6046	315-0820-00			RES, FXD, FILM: 82 OHM, 5%, 0.25W	57668	NTR25J-E82E0
A30A1R6048	321-0337-00			RES, FXD, FILM: 31.6K OHM, 1%, 0.125W, TC=TO	07716	CEAD31601F
A30A1R6052	321-0250-00			RES, FXD, FILM: 3.92K OHM, 1%, 0.125W, TC=TO	07716	CEAD39200F
A30A1R6056	321-0337-00			RES, FXD, FILM: 31.6K OHM, 1%, 0.125W, TC=TO	07716	CEAD31601F
A30A1R6057	321-0321-00			RES, FXD, FILM: 21.5K OHM, 1%, 0.125W, TC=TO	07716	CEAD21501F
A30A1R6058	321-0230-00			RES, FXD, FILM: 2.43K OHM, 1%, 0.125W, TC=TO	19701	5043ED2K430F
A30A1R6061	311-0644-00			RES, VAR, NONWW: TRMR, 20K OHM, 0.5W	32997	3329H-G48-203
A30A1R6063	315-0205-00			RES, FXD, FILM: 2M OHM, 5%, 0.25W	01121	CB2055
A30A1R6073	315-0122-00			RES, FXD, FILM: 1.2K OHM, 5%, 0.25W	57668	NTR25J-E01K2
A30A1R6074	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A30A1R6075	315-0122-00			RES, FXD, FILM: 1.2K OHM, 5%, 0.25W	57668	NTR25J-E01K2
A30A1R6076	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A30A1R6091	308-0054-00			RES, FXD, WW: 10K OHM, 5%, 5W	00213	1550S-10000-5
A30A1RT2093	307-0353-00			RES, THERMAL: 5 OHM, 10%	15454	5DA5R0K270SS-SIL
A30A1RT2097	307-0353-00			RES, THERMAL: 5 OHM, 10%	15454	5DA5R0K270SS-SIL
A30A1S2103	159-0169-00			FUSE, THERMAL: 15A, 1200V, 104 DEG C	27012	4218A1
A30A1T2080	120-1287-00			TRANSFORMER, RF: TOROID	80009	120-1287-00
A30A1T4071	120-1239-00			XFMR, PWR, SDN&SU: HF	80009	120-1239-00
A30A1T4084	120-0640-00			XFMR, TOROID:	TK1345	120-0640-00
A30A1T6044	120-1350-00			TRANSFORMER, RF: TOROID	80009	120-1350-00
A30A1T6081	120-1234-01			TRANSFORMER, RF: BASE DRIVE	80009	120-1234-01
A30A1U2037	156-0495-02	3010100	8010140	MICROCKT, LINEAR: QUAD OPNL AMPL. SELECTED	01295	LM324J4
A30A1U2037	156-0495-00	3010141		MICROCKT, LINEAR: OPNL AMPL.	01295	LM324N

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A30A1U3036	156-0853-00		MICROCKT, LINEAR: OPNL AMPL, DUAL	04713	LM358N
A30A1U3093	119-1168-00		CAPACITOR-RES: 0.1UF, 20% & 22 OHM, 10%, 250VAC	14752	RG1782-1
A30A1U3103	119-1168-00		CAPACITOR-RES: 0.1UF, 20% & 22 OHM, 10%, 250VAC	14752	RG1782-1
A30A1U5043	156-1689-00		CPLR, OPTOELECTR: LED & PHOTOTRANSISTOR, 3750V ISOLATION	03508	H11AVX-535
A30A1U6016	156-0853-00		MICROCKT, LINEAR: OPNL AMPL, DUAL	04713	LM358N
A30A1U6036	156-1126-01		MICROCKT, LINEAR: VOLTAGE COMPARATOR, SELECTED	01295	LM311JG4
A30A1U6043	156-1162-00		CPLR, OPTOELECTR: LED, 2500V	50438	6N136
A30A1U6046	156-1225-00		MICROCKT, LINEAR: DUAL COMPARATOR	01295	LM393P
A30A1U6053	156-1408-00		MICROCKT, LINEAR: TIMER, LOW POWER	32293	ITS9217
A30A1U6059	156-1408-00		MICROCKT, LINEAR: TIMER, LOW POWER	32293	ITS9217
A30A1U6063	156-0366-00		MICROCKT, DGTL: DUAL D FLIP-FLOP	02735	CD4013BF
A30A1U6069	156-0793-00		MICROCKT, DGTL: DUAL 4-INP NAND GATE	02735	CD4012BF
A30A1VR3089	152-0405-00		SEMICON DVC, DI: ZEN, SI, 15V, 5%, 1W, TO-41	12954	DZ841205A
A30A1VR5073	152-0149-00		SEMICON DVC, DI: ZEN, SI, 10V, 5%, 0.4W, DO-7	04713	1N961B
A30A1VR6026	152-0486-00		SEMICON DVC, DI: ZEN, SI, 6.2V, 2%, 400MW, DO-35	80009	152-0486-00
A30A2	670-7226-00		CIRCUIT BD ASSY: FAN DRIVE	80009	670-7226-00
A30A2C1017	283-0024-00		CAP, FXD, CER DI: 0.1UF, +80-20%, 50V	04222	SR215C104MAA
A30A2C1018	283-0198-00		CAP, FXD, CER DI: 0.22UF, 20%, 50V	05397	C330C224M5U1CA
A30A2C1019	283-0198-00		CAP, FXD, CER DI: 0.22UF, 20%, 50V	05397	C330C224M5U1CA
A30A2C1026	290-0523-00		CAP, FXD, ELCTLT: 2.2UF, 20%, 20V	05397	T368A225M020AS
A30A2C1028	290-0523-00		CAP, FXD, ELCTLT: 2.2UF, 20%, 20V	05397	T368A225M020AS
A30A2C1032	290-0804-00		CAP, FXD, ELCTLT: 10UF, +50-20%, 25V	55680	ULB1E100TAAANA
A30A2C1033	290-0804-00		CAP, FXD, ELCTLT: 10UF, +50-20%, 25V	55680	ULB1E100TAAANA
A30A2C2012	290-0804-00		CAP, FXD, ELCTLT: 10UF, +50-20%, 25V	55680	ULB1E100TAAANA
A30A2C2018	283-0198-00		CAP, FXD, CER DI: 0.22UF, 20%, 50V	05397	C330C224M5U1CA
A30A2C2028	290-0523-00		CAP, FXD, ELCTLT: 2.2UF, 20%, 20V	05397	T368A225M020AS
A30A2CR1039	152-0066-00		SEMICON DVC, DI: RECT, SI, 400V, 1A, DO-41	05828	GP10G-020
A30A2CR2040	152-0066-00		SEMICON DVC, DI: RECT, SI, 400V, 1A, DO-41	05828	GP10G-020
A30A2Q1010	151-0521-00		SCR: SI, MU-27	02735	C122B1
A30A2Q1018	151-0188-00		TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A30A2Q1020	151-0188-00		TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A30A2Q1025	151-0302-00		TRANSISTOR: NPN, SI, TO-18	04713	ST899
A30A2Q1038	151-0302-00		TRANSISTOR: NPN, SI, TO-18	04713	ST899
A30A2Q1044	151-0302-00		TRANSISTOR: NPN, SI, TO-18	04713	ST899
A30A2Q2020	151-0188-00		TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A30A2Q2025	151-0334-00		TRANSISTOR: NPN, SI, TO-126	80009	151-0334-00
A30A2Q2030	151-0302-00		TRANSISTOR: NPN, SI, TO-18	04713	ST899
A30A2R1015	315-0270-00		RES, FXD, FILM: 27 OHM, 5%, 0.25W	19701	5043CX27R00J
A30A2R1017	315-0101-00		RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A30A2R1024	315-0681-00		RES, FXD, FILM: 680 OHM, 5%, 0.25W	57668	NTR25J-E680E
A30A2R1026	315-0681-00		RES, FXD, FILM: 680 OHM, 5%, 0.25W	57668	NTR25J-E680E
A30A2R1027	315-0104-00		RES, FXD, FILM: 100K OHM, 5%, 0.25W	57668	NTR25J-E100K
A30A2R1028	315-0163-00		RES, FXD, FILM: 16K OHM, 5%, 0.25W	57668	NTR25J-E 16K
A30A2R1029	315-0223-00		RES, FXD, FILM: 22K OHM, 5%, 0.25W	19701	5043CX22K00J92U
A30A2R1031	315-0473-00		RES, FXD, FILM: 47K OHM, 5%, 0.25W	57668	NTR25J-E47K0
A30A2R1032	315-0163-00		RES, FXD, FILM: 16K OHM, 5%, 0.25W	57668	NTR25J-E 16K
A30A2R1033	315-0393-00		RES, FXD, FILM: 39K OHM, 5%, 0.25W	57668	NTR25J-E39K0
A30A2R1036	315-0223-00		RES, FXD, FILM: 22K OHM, 5%, 0.25W	19701	5043CX22K00J92U
A30A2R2014	315-0333-00		RES, FXD, FILM: 33K OHM, 5%, 0.25W	57668	NTR25J-E33K0
A30A2R2016	315-0104-00		RES, FXD, FILM: 100K OHM, 5%, 0.25W	57668	NTR25J-E100K
A30A2R2019	315-0104-00		RES, FXD, FILM: 100K OHM, 5%, 0.25W	57668	NTR25J-E100K
A30A2R2034	315-0163-00		RES, FXD, FILM: 16K OHM, 5%, 0.25W	57668	NTR25J-E 16K
A30A2R2035	315-0681-00		RES, FXD, FILM: 680 OHM, 5%, 0.25W	57668	NTR25J-E680E
A30A2R2036	315-0223-00		RES, FXD, FILM: 22K OHM, 5%, 0.25W	19701	5043CX22K00J92U
A30A2R2037	315-0104-00		RES, FXD, FILM: 100K OHM, 5%, 0.25W	57668	NTR25J-E100K
A30A2R2039	315-0361-00		RES, FXD, FILM: 360 OHM, 5%, 0.25W	19701	5043CX360R0J
A30A2R2042	315-0623-00		RES, FXD, FILM: 62K OHM, 5%, 0.25W	19701	5043CX62K00J

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A30A2RT2045	307-0472-00		RES, THERMAL:100K OHM, 5%, DISC NTC	15454	07DE104J-220-EC
A30A2VR1015	152-0175-00		SEMICON DVC, DI:ZEN, SI, 5.6V, 5%, 0.5W, DO-7	14552	T03810976
A30A2VR2038	152-0166-00		SEMICON DVC, DI:ZEN, SI, 6.2V, 5%, 400MW, DO-7	04713	SZ11738RL
A30A57	670-9841-00		CIRCUIT BD ASSY: GPIB INTERFACE (492B ONLY)	80009	670-9841-00
A30A57	670-9806-00		CIRCUIT BD ASSY: GPIB INTERFACE (492BP ONLY)	80009	670-9806-00
A30A57C1011	290-0524-00		CAP, FXD, ELCTLT: 4.7UF, 20%, 10V	05397	T368A475M010AZ
A30A57C1012	283-0111-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	SR305C104MAA
A30A57C1013	283-0111-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	SR305C104MAA
A30A57L1011	108-0836-00		COTL, RF: FIXED, 14UH	80009	108-0836-00
A30A57P1011	131-0608-00		TERMINAL, PIN: 0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A30A57P1012	131-2203-02		CONN, RCPT, ELEC: CKT BD, 24 CONT, FEMALE	29587	57-20240-11(398)
A30A57P1013	131-2581-00		CONN, RCPT, ELEC: CKT BD, 4 X 7 CONT, FEMALE	91506	528-AG29D
A30A57R1011	317-0103-00		RES, FXD, CMPSN: 10K OHM, 5%, 0.125W	01121	BB1035
A30A57S1011	260-1721-00		SWITCH, ROCKER: 8, SPST, 125MA, 30VDC	81073	76SB08S
A30A57U1011	156-1415-01		MICROCKT, DGTL: OCTAL GPIB XCVR-MANAGEMENT	27014	DS75161A NA+
A30A57U1012	156-1414-02		MICROCKT, DGTL: OCTAL GPIB BUS XCVR, SCRN	27014	DS75160A N
A30A76	670-5558-02		CIRCUIT BD ASSY: RELAY DRIVER	80009	670-5558-02
A30A76C2012	283-0111-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	SR305C104MAA
A30A76C2024	283-0111-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	SR305C104MAA
A30A76C2036	283-0111-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	SR305C104MAA
A30A76C2038	283-0111-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	SR305C104MAA
A30A76CR1013	152-0322-00		SEMICON DVC, DI: SCHOTTKY, SI, 1.5V, 1.2PF, DO-35	50434	5082-2672
A30A76J1017	131-1437-00		CONN, RCPT, ELEC: D SER, 25 FEM CONT	71468	0B255-F179
A30A76J1034	131-2323-00		CONN, RCPT, ELEC: CKT BD, 12/24 CONT, FEMALE	31781	307-024-526-300
A30A76R1013	315-0202-00		RES, FXD, FILM: 2K OHM, 5%, 0.25W	57668	NTR25J-E 2K
A30A76R2019	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A30A76R2038	315-0472-00		RES, FXD, FILM: 4.7K OHM, 5%, 0.25W	57668	NTR25J-E04K7
A30A76U2015	156-1111-02		MICROCKT, DGTL: OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A30A76U2025	156-1111-02		MICROCKT, DGTL: OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A30A76U2033	156-1111-02		MICROCKT, DGTL: OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A30A76U2038	156-0381-02		MICROCKT, DGTL: QUAD 2-INP EXCL OR GATE	80009	156-0381-02
A32	119-1015-01		FILTER AMPL: 110MHZ	80009	119-1015-01
A32C321	281-0825-00		CAP, FXD, CER DI: 0.005UF, +100-0%, 100V	33095	51-726-008
A32C323	281-0825-00		CAP, FXD, CER DI: 0.005UF, +100-0%, 100V	33095	51-726-008
A32C1054	281-0165-00		CAP, VAR, AIR DI: 0.8-10PF, 250V	73899	MVM-010W
A32P320	131-0938-00		CONN, RCPT, ELEC: SMB, FEMALE	24931	32JR125-1
A32P321	131-0938-00		CONN, RCPT, ELEC: SMB, FEMALE	24931	32JR125-1
A32Q3018	151-0650-00		TRANSISTOR: NPN, SI, TO-39	50545	2SC1252
A32A1	-----		CKT BOARD ASSY: 110 IF (PART OF A32)		
A32A1C1012	283-0204-00		CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A32A1C1022	283-0204-00		CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A32A1C2010	283-0204-00		CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A32A1C2012	283-0204-00		CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A32A1C2029	283-0204-00		CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A32A1C2035	283-0111-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	SR305C104MAA
A32A1C2036	290-0574-00		CAP, FXD, ELCTLT: 47UF, 10%, 20V	05397	T368C476K0202AS
A32A1C2037	283-0204-00		CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A32A1C2047	281-0164-00		CAP, VAR, AIR DI: 0.6-6PF, 250V	73899	MVM-006W
A32A1C2051	283-0204-00		CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A32A1C3032	283-0111-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	SR305C104MAA
A32A1C3036	283-0204-00		CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A32A1C3043	283-0204-00		CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A32A1C3044	283-0204-00		CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A32A1C3045	283-0204-00		CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA
A32A1C4020	283-0204-00		CAP, FXD, CER DI: 0.01UF, 20%, 50V	04222	SR155E103MAA

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A32A1C4026	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A32A1C4035	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A32A1C4036	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A32A1C4045	283-0156-00		CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A32A1CR1029	152-0524-00		SEMICON DVC,DI:SW,SI,100V,0.1A,DO-35	28480	5082-1779
A32A1CR3030	152-0524-00		SEMICON DVC,DI:SW,SI,100V,0.1A,DO-35	28480	5082-1779
A32A1E3036	276-0507-00		SHLD BEAD,ELEK:FERRITE	02114	56-590-65B/3B
A32A1E4046	276-0507-00		SHLD BEAD,ELEK:FERRITE	02114	56-590-65B/3B
A32A1E4053	276-0569-00		CORE,EM:TOROID,FERRITE	28733	T1 20606-C2050
A32A1L1039	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A32A1L2044	108-0956-00		COIL,RF:FIXED	80009	108-0956-00
A32A1Q4037	151-0650-00		TRANSISTOR:NPN,SI,TO-39	S0545	2SC1252
A32A1Q4053	151-0650-00		TRANSISTOR:NPN,SI,TO-39	S0545	2SC1252
A32A1R1012	301-0330-00		RES,FXD,FILM:33 OHM,5%,0.5W	19701	5053CX33R00J
A32A1R1015	311-1281-00		RES,VAR,NONWV:TRMR,2.5K OHM,0.5W	32997	3329S-L58-252
A32A1R2014	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A32A1R2019	315-0511-00		RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A32A1R2028	321-0210-00		RES,FXD,FILM:1.50K OHM,1%,0.125W,TC=TO	19701	5033ED1K50F
A32A1R2029	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A32A1R2030	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A32A1R2032	317-0510-00		RES,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A32A1R2038	317-0180-00		RES,FXD,CMPSN:18 OHM,5%,0.125W	01121	BB1805
A32A1R2039	317-0301-00		RES,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A32A1R2043	317-0301-00		RES,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A32A1R3014	315-0202-00		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A32A1R3029	317-0510-00		RES,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A32A1R3035	321-0239-00		RES,FXD,FILM:3.01K OHM,1%,0.125W,TC=TO	19701	5043ED3K010F
A32A1R3042	315-0271-00		RES,FXD,FILM:270 OHM,5%,0.25W	57668	NTR25J-E270E
A32A1R4012	301-0330-00		RES,FXD,FILM:33 OHM,5%,0.5W	19701	5053CX33R00J
A32A1R4018	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A32A1R4029	307-0113-00		RES,FXD,CMPSN:5.1 OHM,5%,0.25W	01121	CB51G5
A32A1R4030	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A32A1R4032	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A32A1R4038	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A32A1R4039	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A32A1R4043	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A32A1R4047	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A32A1R4058	315-0241-00		RES,FXD,FILM:240 OHM,5%,0.25W	19701	5043CX240R0J
A32A1T2020	120-0902-00		XFMR,TOROID:	80009	120-0902-00
A32A1T3041	120-1235-00		TRANSFORMER,RF:BALUN	80009	120-1235-00
A32A1T3054	120-1235-00		TRANSFORMER,RF:BALUN	80009	120-1235-00
A34	119-1579-01		OSC/MIXER ASSY:3RD CONVERTER	80009	119-1579-01
A34C341	281-0697-00		CAP,FXD,CER DI:5000PF,+100-0%,100V	72982	2425-003W5W0502Z
A34C342	281-0697-00		CAP,FXD,CER DI:5000PF,+100-0%,100V	72982	2425-003W5W0502Z
A34C343	281-0697-00		CAP,FXD,CER DI:5000PF,+100-0%,100V	72982	2425-003W5W0502Z
A34C344	281-0697-00		CAP,FXD,CER DI:5000PF,+100-0%,100V	72982	2425-003W5W0502Z
A34P340	131-0951-01		CONN,RCPT,ELEC:SNAP-ON,MALE	98291	051-051-0329-220
A34P341	131-0951-01		CONN,RCPT,ELEC:SNAP-ON,MALE	98291	051-051-0329-220
A34P342	131-0951-01		CONN,RCPT,ELEC:SNAP-ON,MALE	98291	051-051-0329-220
A34P344	131-0951-01		CONN,RCPT,ELEC:SNAP-ON,MALE	98291	051-051-0329-220
A34P346	131-0951-01		CONN,RCPT,ELEC:SNAP-ON,MALE	98291	051-051-0329-220
A34P347	131-0951-01		CONN,RCPT,ELEC:SNAP-ON,MALE	98291	051-051-0329-220
A34U1017	156-0872-00		MICROCKT,LINER:VOLTAGE REGULATOR	04713	MC7912CT
A34U1025	156-0285-01		MICROCKT,LINER:VOLTAGE REGULATOR,CHK	04713	MC7812CTD
A34A1	-----		CKT BOARD ASSY:3RD CONVERTER (PART OF A34)		
A34A1C1026	283-0347-00		CAP,FXD,CER DI:68PF,5%,100V	72982	8121A108P3K680J
A34A1C1038	281-0165-00		CAP,VAR,AIR DI:0.8-10PF,250V	73899	MVM-010W

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A34A1C1044	283-0191-00		CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A34A1C1049	283-0191-00		CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A34A1C2011	283-0223-00		CAP,FXD,CER DI:3PF,+/-5PF,50V	TK0679	TC501-NPO-309D
A34A1C2021	283-0347-00		CAP,FXD,CER DI:68PF,5%,100V	72982	8121A108P3K680J
A34A1C2022	283-0223-00		CAP,FXD,CER DI:3PF,+/-5PF,50V	TK0679	TC501-NPO-309D
A34A1C2023	283-0223-00		CAP,FXD,CER DI:3PF,+/-5PF,50V	TK0679	TC501-NPO-309D
A34A1C2033	283-0191-00		CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A34A1C2039	283-0107-00		CAP,FXD,CER DI:51PF,5%,200V	04222	SR206A510JAA
A34A1C2041	283-0168-00		CAP,FXD,CER DI:12PF,5%,100V	04222	SR151A120JAA
A34A1C2042	283-0140-00		CAP,FXD,CER DI:4.7PF,+/-0.25PF,50V	72982	8101E003A479C
A34A1C2044	283-0191-00		CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A34A1C2046	283-0191-00		CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A34A1C3022	290-0804-00		CAP,FXD,ELCLT:10UF,+50-20%,25V	55680	ULB1E100TAAANA
A34A1C3036	283-0203-00		CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR3055C474MAA
A34A1C3041	283-0203-00		CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR3055C474MAA
A34A1C3046	283-0191-00		CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A34A1C3055	290-0804-00		CAP,FXD,ELCLT:10UF,+50-20%,25V	55680	ULB1E100TAAANA
A34A1CR3039	152-0650-00		SEMICON DVC,DI:VVC,30V,11.5PF,A276	50101	U11-4101
A34A1L1041	108-1129-00		COIL,RF:FIXED,100MH	80009	108-1129-00
A34A1L2022	108-0606-00		COIL,RF:FIXED,31NH	80009	108-0606-00
A34A1L2023	108-0606-00		COIL,RF:FIXED,31NH	80009	108-0606-00
A34A1L2052	108-0436-00		COIL,RF:FIXED,240UH ON FORM	80009	108-0436-00
A34A1L3041	108-1161-00		COIL,RF:FXD,175NH	80009	108-1161-00
A34A1P2042	131-0608-00		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A34A1Q2038	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A34A1Q2041	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A34A1Q2042	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A34A1R1011	321-1068-07		RES,FXD,FILM:50.5 OHM,0.1%,0.125W,TC=T9	57668	RB14 BZE 50E5
A34A1R1021	321-0306-00		RES,FXD,FILM:15.0K OHM,1%,0.125W,TC=T0	19701	5033ED15J00F
A34A1R1022	321-0243-00		RES,FXD,FILM:3.32K OHM,1%,0.125W,TC=T0	19701	5033ED3K32F
A34A1R1024	317-0302-00		RES,FXD,CMPSN:3K OHM,5%,0.125W	01121	BB3025
A34A1R1041	311-1261-00		RES,VAR,NONW:TRMR,500 OHM,0.5W	32997	3329P-L58-501
A34A1R1042	321-0960-07		RES,FXD,FILM:513 OHM,0.1%,0.125W,TC=T9	24546	NE55E5130B
A34A1R1043	321-0239-03		RES,FXD,FILM:3.01K OHM,0.25%,0.125W,TC=T0	19701	5033RC3K01C
A34A1R1044	317-0100-00		RES,FXD,CMPSN:10 OHM,5%,0.125W	01121	BB1005
A34A1R1045	317-0201-00		RES,FXD,CMPSN:200 OHM,5%,0.125W	01121	BB2015
A34A1R1048	317-0201-00		RES,FXD,CMPSN:200 OHM,5%,0.125W	01121	BB2015
A34A1R1051	315-0132-00		RES,FXD,FILM:1.3K OHM,5%,0.25W	57668	NTR25J-E01K3
A34A1R2011	321-0193-07		RES,FXD,FILM:1K OHM,0.1%,0.125W,TC=T9	19701	5033RE1K000B
A34A1R2038	317-0680-00		RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A34A1R2042	317-0750-00		RES,FXD,CMPSN:75 OHM,5%,0.125W	01121	BB7505
A34A1R2044	315-0911-00		RES,FXD,FILM:910 OHM,5%,0.25W	57668	NTR25J-E910E
A34A1R2045	317-0201-00		RES,FXD,CMPSN:200 OHM,5%,0.125W	01121	BB2015
A34A1R2046	317-0201-00		RES,FXD,CMPSN:200 OHM,5%,0.125W	01121	BB2015
A34A1R2047	317-0750-00		RES,FXD,CMPSN:75 OHM,5%,0.125W	01121	BB7505
A34A1R3031	317-0201-00		RES,FXD,CMPSN:200 OHM,5%,0.125W	01121	BB2015
A34A1R3032	317-0242-00		RES,FXD,CMPSN:2.4K OHM,5%,0.125W	01121	BB2425
A34A1R3034	317-0103-00		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A34A1R3035	317-0103-00		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A34A1R3041	317-0103-00		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A34A1R3042	317-0103-00		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A34A1R3044	315-0911-00		RES,FXD,FILM:910 OHM,5%,0.25W	57668	NTR25J-E910E
A34A1R3046	317-0220-00		RES,FXD,CMPSN:22 OHM,5%,0.125W	01121	BB2205
A34A1U2022	155-0285-00		MICROCKT,DGTL:CALIBRATOR	80009	155-0285-00
A34A1U3031	155-0287-00		MICROCKT,DGTL:DISTRIBUTION AMPLIFIER	80009	155-0287-00
A34A1U3051	155-0286-00		MICROCKT,DGTL:MIXER	80009	155-0286-00
A34A1VR1051	152-0456-00		SEMICON DVC,DI:ZEN,SI,6.2V,5%,0.4W,DO-7	04713	1N827
A34A1Y3038	158-0258-00		XTAL UNIT,QTZ:100MHZ,5PPM,-15 TO +75 DEG	00809	HC-35/U

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A34A2	-----		CIRCUIT BD ASSY:100MHZ OSC REGULATOR (PART OF A34)		
A34A2C1015	290-0973-00		CAP,FXD,ELCTLT:100UF,20%,25VDC	55680	ULB1E101MPA
A34A2C1021	290-0973-00		CAP,FXD,ELCTLT:100UF,20%,25VDC	55680	ULB1E101MPA
A34A2L1015	108-1112-00		COIL,RF:FIXED 170UH	80009	108-1112-00
A34A2L1025	108-1112-00		COIL,RF:FIXED 170UH	80009	108-1112-00
A34A2R1015	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A34A2R1021	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A34A2W1017	175-8737-00		CA ASSY,SP,ELEC:5,26 AWG,4.0 L,RIBBON	TK1375	175-8737-00
A34A3	119-1905-01		RELAY ASSEMBLY: (OPTION 07 ONLY)	80009	119-1905-01
A34A3C345	281-0825-00		CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A34A3A1	670-8491-01		CIRCUIT BD ASSY:RELAY (OPTION 07 ONLY)	80009	670-8491-01
A34A3A1C1010	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A34A3A1CR1010	152-0141-02		SEMICONV DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A34A3A1CR1012	152-0141-02		SEMICONV DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A34A3A1CR1014	152-0141-02		SEMICONV DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A34A3A1CR1016	152-0141-02		SEMICONV DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A34A3A1CR1018	152-0141-02		SEMICONV DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A34A3A1CR1019	152-0141-02		SEMICONV DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A34A3AiK1010	148-0108-00		RELAY,ARMATURE:2 FORM C,1.0A,28VDC,COIL 5VD C 61 OHM	11532	720-5
A34A3A1R1010	321-0083-00		RES,FXD,FILM:71.5 OHM,1%,0.125W,TC=TO	07716	CEAD71R50F
A34A3A1R1012	321-0090-00		RES,FXD,FILM:84.5 OHM,1%,0.125W,TC=TO	91637	CMF55116G84R50F
A34A3A1R1014	321-0143-00		RES,FXD,FILM:301 OHM,1%,0.125W,TC=TO	07716	CEAD301R0F
A34A3A1R1016	301-0101-00		RES,FXD,FILM:100 OHM,5%,0.5W	01121	EB1015
A36	119-2429-00		PH LOCK 3RD LO:	80009	119-2429-00
A36C261	281-0825-00		CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A36C263	281-0825-00		CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A36C265	281-0825-00		CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A36C267	281-0825-00		CAP,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A36A1	670-9795-00		CIRCUIT BD ASSY:REF LOCK	80009	670-9795-00
A36A1C1012	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A36A1C1013	290-0782-00		CAP,FXD,ELCTLT:4.7UF,+75-20%,35VDC	55680	ULB1V4R7TAAANA
A36A1C1019	283-0167-00		CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A36A1C1021	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A36A1C1023	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A36A1C1026	283-0167-00		CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A36A1C1030	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A36A1C1031	283-0486-00		CAP,FXD,CER DI:1.0UF,10%,50V	04222	SR405105K
A36A1C1032	283-0167-00		CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A36A1C1033	283-0486-00		CAP,FXD,CER DI:1.0UF,10%,50V	04222	SR405105K
A36A1C1036	283-0167-00		CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A36A1C1037	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A36A1C1038	281-0812-00		CAP,FXD,CER DI:1000PF,10%,100V	04222	MA101C102KAA
A36A1C1040	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A36A1C1046	290-0746-00		CAP,FXD,ELCTLT:47UF,+50-20%,16V	54473	ECE-A6V47L
A36A1C2017	290-0782-00		CAP,FXD,ELCTLT:4.7UF,+75-20%,35VDC	55680	ULB1V4R7TAAANA
A36A1C2018	290-0782-00		CAP,FXD,ELCTLT:4.7UF,+75-20%,35VDC	55680	ULB1V4R7TAAANA
A36A1C2019	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A36A1C2020	290-0782-00		CAP,FXD,ELCTLT:4.7UF,+75-20%,35VDC	55680	ULB1V4R7TAAANA
A36A1C2024	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A36A1C2029	283-0167-00		CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A36A1C2038	283-0785-00		CAP,FXD,MICA DI:250PF,1%,500V	00853	D155F251F0
A36A1C2039	283-0167-00		CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A36A1C2042	283-0220-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A36A1CR1020	152-0141-02		SEMICONV DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A36A1CR2021	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A36A1CR2022	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A36A1CR2036	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A36A1L2013	108-1202-00		COIL,RF:FXD,TOROIDAL,4.5UH +22% -37%	24226	ORDER BY DESCR
A36A1P1017	131-0608-00		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A36A1P1021	131-0608-00		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A36A1P1026	131-0608-00		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A36A1Q1031	151-0190-00		TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A36A1Q1033	151-0190-00		TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A36A1Q2014	151-0424-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS8246
A36A1R1011	321-0251-00		RES,FXD,FILM:4.02K OHM,1%,0.125W,TC=TO	19701	5033ED4K020F
A36A1R1012	321-0314-00		RES,FXD,FILM:18.2K OHM,1%,0.125W,TC=TO	19701	5043ED18K20F
A36A1R1013	321-0638-00		RES,FXD,FILM:7.96K OHM,1%,0.125W,TC=TO	24546	NA55D7961F
A36A1R1014	321-0417-00		RES,FXD,FILM:215K OHM,1%,0.125W,TC=TO	01121	ADVISE
A36A1R1015	317-0103-00		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	8B1035
A36A1R1016	321-0460-00		RES,FXD,FILM:604K OHM,1%,0.125W,TC=TO	07716	CEAD60402F
A36A1R1017	317-0100-00		RES,FXD,CMPSN:10 OHM,5%,0.125W	01121	8B1005
A36A1R1018	317-0512-00		RES,FXD,CMPSN:5.1K OHM,5%,0.125	01121	8B5125
A36A1R1019	317-0102-00		RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	8B1025
A36A1R1021	317-0510-00		RES,FXD,CMPSN:51 OHM,5%,0.125W	01121	8B5105
A36A1R1022	317-0104-00		RES,FXD,CMPSN:100K OHM,5%,0.125W	01121	8B1045
A36A1R1023	317-0472-00		RES,FXD,CMPSN:4.7K OHM,5%,0.125W	01121	8B4725
A36A1R1028	321-0356-00		RES,FXD,FILM:49.9K OHM,1%,0.125W,TC=TO	19701	5033ED49K90F
A36A1R1029	317-0205-00		RES,FXD,CMPSN:2M OHM,5%,0.125W	01121	8B2055
A36A1R1033	317-0100-00		RES,FXD,CMPSN:10 OHM,5%,0.125W	01121	8B1005
A36A1R1034	317-0154-00		RES,FXD,CMPSN:150K OHM,5%,0.125	01121	8B1545
A36A1R1035	317-0154-00		RES,FXD,CMPSN:150K OHM,5%,0.125	01121	8B1545
A36A1R1036	317-0100-00		RES,FXD,CMPSN:10 OHM,5%,0.125W	01121	8B1005
A36A1R1037	317-0124-00		RES,FXD,CMPSN:120K OHM,5%,0.125W	01121	8B1245
A36A1R1038	317-0154-00		RES,FXD,CMPSN:150K OHM,5%,0.125	01121	8B1545
A36A1R1039	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A36A1R1040	317-0154-00		RES,FXD,CMPSN:150K OHM,5%,0.125	01121	8B1545
A36A1R1041	317-0103-00		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	8B1035
A36A1R1042	317-0103-00		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	8B1035
A36A1R1044	317-0102-00		RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	8B1025
A36A1R1047	317-0102-00		RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	8B1025
A36A1R1048	317-0102-00		RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	8B1025
A36A1R2015	317-0100-00		RES,FXD,CMPSN:10 OHM,5%,0.125W	01121	8B1005
A36A1R2016	317-0681-00		RES,FXD,CMPSN:680 OHM,5%,0.125W	01121	8B6815
A36A1R2019	317-0103-00		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	8B1035
A36A1R2021	317-0103-00		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	8B1035
A36A1R2024	317-0511-00		RES,FXD,CMPSN:510 OHM,5%,0.125W	01121	8B5115
A36A1R2030	317-0622-00		RES,FXD,CMPSN:6.2K OHM,5%,0.125W	01121	8B6225
A36A1R2031	317-0512-00		RES,FXD,CMPSN:5.1K OHM,5%,0.125	01121	8B5125
A36A1R2032	317-0222-00		RES,FXD,CMPSN:2.2K OHM,5%,0.125W	01121	8B2225
A36A1R2033	317-0512-00		RES,FXD,CMPSN:5.1K OHM,5%,0.125	01121	8B5125
A36A1R2035	317-0163-00		RES,FXD,CMPSN:16K OHM,5%,0.125W	01121	8B1635
A36A1R2039	321-0272-00		RES,FXD,FILM:6.65K OHM,1%,0.125W,TC=TO	19701	5043ED6K650F
A36A1R2042	311-0609-00		RES,VAR,NONW:TRMR,2K OHM,0.5W	32997	3329H-L58-202
A36A1R2043	317-0203-00		RES,FXD,CMPSN:20K OHM,5%,0.125W	01121	8B2035
A36A1R2045	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A36A1TP1044	214-0579-00		TERM,TEST POINT:BRS CD PL	80009	214-0579-00
A36A1TP2026	214-0579-00		TERM,TEST POINT:BRS CD PL	80009	214-0579-00
A36A1U1012	156-1225-01		MICROCKT,LINER:DUAL COMPARATOR,SCREENED	01295	LM393P3
A36A1U1034	156-1156-00		MICROCKT,LINER:BIFET,OPNL AMPL	80009	156-1156-00
A36A1U1044	156-0388-03		MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	80009	156-0388-03
A36A1U2020	156-1248-00		MICROCKT,DGTL:ECL,PRESALER/DIVIDE BY 100	52648	SP8629



Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A36A1U2032	156-0721-02		MICROCKT,DGTL:QUAD ST 2-INP NAND GATES	80009	156-0721-02
A36A1U2046	156-1335-00		MICROCKT,DGTL:LSTTL,DUAL RETRIGGERABLE RESE TTABLE MONOSTABLE MV,SCRN	80009	156-1335-00
A36A2	670-9796-00		CIRCUIT BD ASSY:REFERENCE LOCK REGULATOR	80009	670-9796-00
A36A2C2030	283-0167-00		CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A36A2C2035	283-0167-00		CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A36A2Q1020	151-0190-00		TRANSISTOR:NPN,SI,T0-92	80009	151-0190-00
A36A2R1010	311-2168-00		RES,VAR,NONNW:TRMR,10K OHM,10%,0.5W	18612	1280G 10K OHM 1%
A36A2R1011	321-0239-07		RES,FXD,FILM:3.01K OHM,0.1%,0.125W,TC=T9MI	07716	CEAE30100B
A36A2R1012	321-0249-09		RES,FXD,FILM:3.83K OHM,0.1%,0.125W,TC=T9	19701	5033RE3K830F
A36A2R1019	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A36A2R1021	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A36A2U1010	156-0858-00		MICROCKT,DGTL:CMOS,QUAD SPST ANALOG XMSN GA TE	17856	DG201ACJ
A36A2U2030	156-0277-01		MICROCKT,LINER:VOLTAGE RGLTR,POS 5V,SCRN	04713	MC7805CTD
A38	670-7947-03		CIRCUIT BD ASSY:FRONT PNL	80009	670-7947-03
A38C1016	283-0239-00		CAP,FXD,CER DI:0.022UF,10%,50V	04222	3439-050C-223K
A38C1047	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A38C2046	283-0776-00		CAP,FXD,MICA DI:2130 PF,1%,500V	00853	D195F2131F0
A38C3030	283-0154-00		CAP,FXD,CER DI:22PF,5%,50V	04222	SR155A220JAA
A38C4028	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A38C5021	283-0249-00		CAP,FXD,CER DI:0.068PF,10%,50V	04222	SR305C683KAA
A38C6021	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A38C6091	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A38CR1017	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A38CR2018	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A38CR2043	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A38CR3012	152-0322-00		SEMICON DVC,DI:SCOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A38CR3013	152-0322-00		SEMICON DVC,DI:SCOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A38CR4017	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A38CR4027	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A38CR6035	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A38CR6090	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A38DS1048	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS1054	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS1121	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS2014	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS2016	150-1031-00		LT EMITTING DIO:RED,650NM,40MA MAX	50434	HLMP-1002
A38DS2048	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS2049	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS2056	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS2058	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS2122	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS2122	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3035	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3036	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3037	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3038	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3043	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3044	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3045	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3046	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3047	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3048	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3052	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3053	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3055	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS3122	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A38DS3123	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS4046	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS4052	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS4122	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS4123	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS5015	150-1029-00		LT EMITTING DIO:GREEN,565NM,35MA	58361	Q6480/MV5274C
A38DS5050	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS5120	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS5124	150-1031-00		LT EMITTING DIO:RED,650NM,40MA MAX	50434	HLMP-1002
A38DS6046	150-1033-00		LT EMITTING DIO:AMBER,585NM,40MA MAX	50434	HLMP-1401
A38DS6052	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38DS6062	150-1068-00		LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A38L1045	108-0742-00		COIL,RF:FIXED,83UH	80009	108-0742-00
A38R1015	315-0334-00		RES,FXD,FILM:330K OHM,5%,0.25W	57668	NTR25J-E 330K
A38R1019	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A38R1026	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A38R1028	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A38R1030	315-0563-00		RES,FXD,FILM:56K OHM,5%,0.25W	19701	5043CX56K00J
A38R1031	315-0563-00		RES,FXD,FILM:56K OHM,5%,0.25W	19701	5043CX56K00J
A38R1039	307-0594-00		RES NTWK,FXD,FI:(8)220 OHM,2%,0.125W	11236	750-81-R220
A38R1053	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A38R1055	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A38R1056	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A38R1121	311-2051-00		RES,VAR, NONWV:PNL,10K OHM,20%,0.5W	01121	WR8602
A38R2019	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A38R2021	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A38R2031	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A38R2041	307-0696-00		RES NTWK,FXD,FI:7,10K OHM,2%,0.15W EACH	01121	108A103
A38R2044	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A38R2045	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A38R3119	307-0592-00		RES NTWK,FXD,FI:9,220 OHM,2%,2W	11236	750-101-R220
A38R4043	311-2051-00		RES,VAR, NONWV:PNL,10K OHM,20%,0.5W	01121	WR8602
A38R4054	307-0594-00		RES NTWK,FXD,FI:(8)220 OHM,2%,0.125W	11236	750-81-R220
A38R4059	307-0594-00		RES NTWK,FXD,FI:(8)220 OHM,2%,0.125W	11236	750-81-R220
A38R4121	311-2051-00		RES,VAR, NONWV:PNL,10K OHM,20%,0.5W	01121	WR8602
A38R5011	315-0202-00		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A38R5012	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A38R6049	311-2049-00		RES,VAR, NONWV:PNL,5K OHM,20%,0.5W	01121	WRA1A028S502M
A38R6051	311-2050-00		RES,VAR, NONWV:PNL,1K OHM,20%,0.5W	01121	WRA1A028S102M
A38R6059	321-0187-00		RES,FXD,FILM:866 OHM,1%,0.125W,TC=TO	07716	CEAD866ROF
A38R6060	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A38R6062	311-2054-00		RES,VAR, NONWV:PNL,20K OHM,20%,0.5W	01121	WRA1A048S203M
A38R6101	321-0250-00		RES,FXD,FILM:3.92K OHM,1%,0.125W,TC=TO	07716	CEAD39200F
A38R6102	321-0198-00		RES,FXD,FILM:1.13K OHM,1%,0.125W,TC=TO	07716	CEAD11300F
A38R6104	311-2052-00		RES,VAR, NONWV:PNL,20K OHM,20%,0.5W	01121	WRA1A028S203M
A38R6106	311-2052-00		RES,VAR, NONWV:PNL,20K OHM,20%,0.5W	01121	WRA1A028S203M
A38S1023	263-0020-02		SWITCH PB ASSY:MOMENTARY	80009	263-0020-02
A38S1048	263-0020-01		SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S1054	263-0020-01		SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S1121	263-0020-01		SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S2014	263-0020-01		SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S2020	263-0020-02		SWITCH PB ASSY:MOMENTARY	80009	263-0020-02
A38S2035	263-0054-02		SWITCH, ROTARY:OPTICAL	80009	263-0054-02
A38S2048	263-0020-01		SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S2049	263-0020-01		SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S2056	263-0020-01		SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S2058	263-0020-01		SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S2122	263-0020-01		SWITCH PB ASSY:MOMENTARY	80009	263-0020-01

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix		Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
	Part No.		Effective	Discont			
A38S2123	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3035	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3036	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3037	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3038	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3043	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3044	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3045	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3046	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3047	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3048	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3052	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3053	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3055	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3122	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S3123	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S4046	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S4052	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S4122	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S4123	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S5050	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S5120	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S6052	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38S6062	263-0020-01				SWITCH PB ASSY:MOMENTARY	80009	263-0020-01
A38U1024	156-0876-00				MICROCKT,DGTL:CMOS,HEX SCHMITT TRIGGER	27014	MM74C14 J OR N
A38U1049	156-0651-02				MICROCKT,DGTL:8-BIT PRL-OUT SER SHF RGTR	80009	156-0651-02
A38U2013	156-0388-03				MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	80009	156-0388-03
A38U2020	156-0385-02				MICROCKT,DGTL:HEX INVERTER,SCRN	80009	156-0385-02
A38U3013	156-0388-03				MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	80009	156-0388-03
A38U3039	160-2357-00	B010100	8010135		MICROCKT,DGTL:8 BIT MICROCOMPUTER	80009	160-2357-00
A38U3039	160-2357-01	B010136			MICROCKT,DGTL:8 BIT MICROCOMPUTER,PRGM	80009	160-2357-01
A38U4014	156-0722-02				MICROCKT,DGTL:TRIPLE 3-INP NAND W/OC OUT	80009	156-0722-02
A38U4021	156-1432-00				MICROCKT,DGTL:DUAL 2/4 LINE DECODER/DEMUX	80009	156-1432-00
A38U4030	156-0956-02				MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT,SCRN	80009	156-0956-02
A38U5021	156-1432-00				MICROCKT,DGTL:DUAL 2/4 LINE DECODER/DEMUX	80009	156-1432-00
A38U5045	156-0651-02				MICROCKT,DGTL:8-BIT PRL-OUT SER SHF RGTR	80009	156-0651-02
A38U6024	156-0469-02				MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A38U6028	156-0651-02				MICROCKT,DGTL:8-BIT PRL-OUT SER SHF RGTR	80009	156-0651-02
A38U6045	156-0651-02				MICROCKT,DGTL:8-BIT PRL-OUT SER SHF RGTR	80009	156-0651-02
A38U6081	156-0651-02				MICROCKT,DGTL:8-BIT PRL-OUT SER SHF RGTR	80009	156-0651-02
A38U6090	156-1161-00				MICROCKT,LINEAR-VOLTAGE REGULATOR,POS,ADJ	12969	UC3177
A38Y3030	158-0185-00				XTAL UNIT,QTZ:6 MHZ,0.015%,PAR	33096	CCAT101352
A40	670-8389-01				CIRCUIT BD ASSY:VIDEO PROCESSOR	80009	670-8389-01
A40C2016	285-1056-00				CAP,FXD,PLASTIC:1UF,2%,50V	14752	650B1A105G
A40C2051	283-0024-00				CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C2057	283-0024-00				CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C2061	283-0024-00				CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C2066	283-0024-00				CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C2068	283-0024-00				CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3011	283-0024-00				CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3015	283-0024-00				CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3026	285-0597-00				CAP,FXD,PLASTIC:0.001UF,1%,100V	14752	410B1B102F
A40C3034	283-0024-00				CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3035	283-0024-00				CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3037	283-0024-00				CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3042	290-0755-00				CAP,FXD,ELCTLT:100UF,+50%-20%,10WVDC	54473	ECE-A10V100L
A40C3045	283-0024-00				CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3048	290-0745-00				CAP,FXD,ELCTLT:22UF,+50%-20%,25WVDC	54473	ECE-A25V22L

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A40C3052	290-0745-00		CAP,FXD,ELCLT:22UF,+50-20%,25WVDC	54473	ECE-A25V22L
A40C3056	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3058	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3059	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C3062	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C4011	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40C4014	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A40CR2051	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A40CR3045	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A40CR4016	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A40CR4060	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A40L4042	108-0881-00		COIL,RF:FIXED,40.1UH	80009	108-0881-00
A40L4052	108-0881-00		COIL,RF:FIXED,40.1UH	80009	108-0881-00
A40L4053	108-0881-00		COIL,RF:FIXED,40.1UH	80009	108-0881-00
A40Q3038	151-0261-00		TRANSISTOR:PNP,SI,TO-77	80009	151-0261-00
A40Q4025	151-0224-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS6917
A40Q4060	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A40R1012	311-1338-00		RES,VAR,NONW:TRMR,20K OHM,0.75W	02111	43P203T672
A40R1013	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1015	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1019	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1022	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1024	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1026	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1028	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1032	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1034	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1036	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1038	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1043	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1045	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1047	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1051	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1053	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1057	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1059	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1061	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1063	321-0171-00		RES,FXD,FILM:590 OHM,1%,0.125W,TC=TO	19701	5033ED590ROF
A40R1067	321-0360-00		RES,FXD,FILM:54.9K OHM,1%,0.125W,TC=TO	19701	5033ED54K90F
A40R1069	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R1070	311-1319-00		RES,VAR,NONW:TRMR,10K OHM,0.5W	32997	3006P-W84-103
A40R2021	321-0265-00		RES,FXD,FILM:5.62K OHM,1%,0.125W,TC=TO	19701	5043ED5620F
A40R2022	321-0361-00		RES,FXD,FILM:56.2K OHM,1%,0.125W,TC=TO	07716	CEAD56201F
A40R2023	321-0452-00		RES,FXD,FILM:499K OHM,1%,0.125W,TC=TO	19701	5043ED499K0F
A40R2051	321-0231-00		RES,FXD,FILM:2.49K OHM,1%,0.125W,TC=TO	19701	5033ED2K49F
A40R2053	321-0097-00		RES,FXD,FILM:100 OHM,1%,0.125W,TC=TO	91637	CMF55116G100ROF
A40R2054	321-0318-00		RES,FXD,FILM:20.0K OHM,1%,0.125W,TC=TO	19701	5033ED20K00F
A40R2055	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A40R2056	321-0277-00		RES,FXD,FILM:7.50K OHM,1%,0.125W,TC=TO	24546	NA55D7501F
A40R2057	321-0329-00		RES,FXD,FILM:26.1K OHM,1%,0.125W,TC=TO	19701	5043ED26K10F
A40R2058	321-0260-00		RES,FXD,FILM:4.99K OHM,1%,0.125W,TC=TO	19701	5033ED4K990F
A40R2064	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A40R2066	321-0327-00		RES,FXD,FILM:24.9K OHM,1%,0.125W,TC=TO	07716	CEAD24901F
A40R3011	321-0294-00		RES,FXD,FILM:11.3K OHM,1%,0.125W,TC=TO	19701	5043ED11K30F
A40R3012	321-0308-00		RES,FXD,FILM:15.8K OHM,1%,0.125W,TC=TO	07716	CEAD 15801F
A40R3020	321-0239-00		RES,FXD,FILM:3.01K OHM,1%,0.125W,TC=TO	19701	5043ED3K010F
A40R3023	315-0122-00		RES,FXD,FILM:1.2K OHM,5%,0.25W	57668	NTR25J-E01K2
A40R3024	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1

Component No.	Tektronix		Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
	Part No.	Effective	Discont				
A40R3025	315-0512-00				RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A40R3028	321-0298-00				RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=TO	07716	CEAD12401F
A40R3030	311-1917-00				RES,VAR,NONW:TRMR,5K OHM,10%,0.5 W	32997	3386C-T07-502
A40R3046	321-0318-00				RES,FXD,FILM:20.0K OHM,1%,0.125W,TC=TO	19701	5033ED20K00F
A40R3053	315-0101-00				RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A40R3058	315-0101-00				RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A40R3059	315-0101-00				RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A40R3064	315-0152-00				RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A40R3065	315-0303-00				RES,FXD,FILM:30K OHM,5%,0.25W	19701	5043CX30K00J
A40R4010	321-0306-00				RES,FXD,FILM:15.0K OHM,1%,0.125W,TC=TO	19701	5033ED15J00F
A40R4011	321-0289-00				RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A40R4012	321-0289-00				RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A40R4013	321-0335-00				RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A40R4014	321-0335-00				RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A40R4015	321-0328-00				RES,FXD,FILM:25.5K OHM,1%,0.125W,TC=TO	19701	5043ED25K50F
A40R4017	321-0308-00				RES,FXD,FILM:15.8K OHM,1%,0.125W,TC=TO	07716	CEAD 15801F
A40R4018	321-0304-00				RES,FXD,FILM:14.3K OHM,1%,0.125W,TC=TO	19701	5033ED14K30F
A40R4022	315-0162-00				RES,FXD,FILM:1.6K OHM,5%,0.25W	19701	5043CX1K600J
A40R4023	321-0289-00				RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A40R4024	321-0304-00				RES,FXD,FILM:14.3K OHM,1%,0.125W,TC=TO	19701	5033ED14K30F
A40R4025	315-0104-00				RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A40R4027	321-0260-00				RES,FXD,FILM:4.99K OHM,1%,0.125W,TC=TO	19701	5033ED4K990F
A40R4028	321-0243-00				RES,FXD,FILM:3.32K OHM,1%,0.125W,TC=TO	19701	5033ED3K32F
A40R4029	321-0289-00				RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A40R4046	321-0289-00				RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A40R4060	315-0471-00				RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A40R4065	315-0104-00				RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A40R4066	315-0104-00				RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A40R4067	315-0104-00				RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A40R4068	315-0241-00				RES,FXD,FILM:240 OHM,5%,0.25W	19701	5043CX240R0J
A40U2015	156-1211-00				MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	27014	LF13333N
A40U2039	155-0106-00				MICROCKT,DGTL:NORMAL CKT	80009	155-0106-00
A40U2055	156-0158-04				MICROCKT,LINEAR:DUAL OPNL AMPL	01295	MC1458JG
A40U2066	156-0770-00				MICROCKT,LINEAR:OPNL AMPL	27014	LF356H
A40U3015	156-0570-00				MICROCKT,LINEAR:DUAL COMPARATOR	27014	LM319H
A40U3025	156-1211-00				MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	27014	LF13333N
A40U3035	156-0913-02				MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A40U3040	156-0469-02				MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A40U3045	156-0158-04				MICROCKT,LINEAR:DUAL OPNL AMPL	01295	MC1458JG
A40U3062	156-0770-00				MICROCKT,LINEAR:OPNL AMPL	27014	LF356H
A40U3063	156-1211-00				MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	27014	LF13333N
A40VR3011	152-0662-00				SEMICON DVC,DI:ZEN,SI,5V,1%,400MW,DO-7	04713	SZG195RL
A40VR4011	152-0662-00				SEMICON DVC,DI:ZEN,SI,5V,1%,400MW,DO-7	04713	SZG195RL
A40VR4028	152-0195-00				SEMICON DVC,DI:ZEN,SI,5.1V,5%,0.4W,DO-7	04713	SZ11755RL
A40W3026	131-0566-00				BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A42	672-0166-01				CIRCUIT BD ASSY:PRESELECTOR DRIVER	80009	672-0166-01
A42Q565	151-0426-00				TRANSISTOR:NPN,SI,TO-220	80009	151-0426-00
A42A1	670-5552-05				CIRCUIT BD ASSY:PRESELECTOR DRIVER	80009	670-5552-05
A42A1C2026	283-0070-00				CAP,FXD,CER DI:30PF,10%,50V	51642	200-050-NP0-300K
A42A1C2045	283-0070-00				CAP,FXD,CER DI:30PF,10%,50V	51642	200-050-NP0-300K
A42A1C2065	283-0330-00				CAP,FXD,CER DI:100PF,5%,50V	05397	C320C101J5R5CA
A42A1C3021	283-0190-00				CAP,FXD,CER DI:0.47UF,5%,50V	04222	SR305C474JAA
A42A1C3028	283-0111-00				CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A42A1C3043	283-0004-00				CAP,FXD,CER DI:0.02UF,+80-20%,150V	59660	855-558Z5V0203Z
A42A1C3048	283-0051-00				CAP,FXD,CER DI:0.0033UF,5%,100V	04222	SR301A332JAA
A42A1C3052	283-0070-00				CAP,FXD,CER DI:30PF,10%,50V	51642	200-050-NP0-300K
A42A1C3061	283-0111-00				CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A42A1C4038	283-0111-00				CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A42A1C4041	290-0718-00		CAP, FXD, ELCTLT: 22UF, 20%, 35V	56289	196D226X0035PE4
A42A1C4044	290-0718-00		CAP, FXD, ELCTLT: 22UF, 20%, 35V	56289	196D226X0035PE4
A42A1C4061	290-0158-00		CAP, FXD, ELCTLT: 50UF, +75-15%, 25V	26769	40LW506B025U1A
A42A1C4071	290-0209-00		CAP, FXD, ELCTLT: 50UF, +75-10%, 25V	56289	30D506G025CC9
A42A1C5026	283-0111-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	SR305C104MAA
A42A1C5041	290-0718-00		CAP, FXD, ELCTLT: 22UF, 20%, 35V	56289	196D226X0035PE4
A42A1C5046	290-0718-00		CAP, FXD, ELCTLT: 22UF, 20%, 35V	56289	196D226X0035PE4
A42A1C5051	290-0755-00		CAP, FXD, ELCTLT: 100UF, +50%-20%, 10WVDC	54473	ECE-A10V100L
A42A1C5061	283-0111-00		CAP, FXD, CER DI: 0.1UF, 20%, 50V	04222	SR305C104MAA
A42A1CR1020	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A42A1CR1021	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A42A1CR2065	152-0322-00		SEMICON DVC, DI: SCHOTTKY, SI, 15V, 1.2PF, DO-35	50434	5082-2672
A42A1CR2077	152-0322-00		SEMICON DVC, DI: SCHOTTKY, SI, 15V, 1.2PF, DO-35	50434	5082-2672
A42A1CR2078	152-0322-00		SEMICON DVC, DI: SCHOTTKY, SI, 15V, 1.2PF, DO-35	50434	5082-2672
A42A1CR3061	152-0322-00		SEMICON DVC, DI: SCHOTTKY, SI, 15V, 1.2PF, DO-35	50434	5082-2672
A42A1CR3073	152-0353-00		SEMICON DVC, DI: RECT, SI, 800V, 1W	05828	GP10K-014
A42A1CR4012	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A42A1CR4013	152-0141-02		SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A42A1CR4032	152-0322-00		SEMICON DVC, DI: SCHOTTKY, SI, 15V, 1.2PF, DO-35	50434	5082-2672
A42A1CR4061	152-0333-00		SEMICON DVC, DI: SW, SI, 55V, 200MA, DO-35	07263	FDH-6012
A42A1L4056	108-0881-00		COIL, RF: FIXED, 40.1UH	80009	108-0881-00
A42A1L5051	108-0881-00		COIL, RF: FIXED, 40.1UH	80009	108-0881-00
A42A1Q1011	151-0301-00		TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A42A1Q1022	151-1022-00		TRANSISTOR: FET, N-CHAN, SI, TO-18	80009	151-1022-00
A42A1Q1024	151-1022-00		TRANSISTOR: FET, N-CHAN, SI, TO-18	80009	151-1022-00
A42A1Q2034	151-1022-00		TRANSISTOR: FET, N-CHAN, SI, TO-18	80009	151-1022-00
A42A1Q2036	151-1022-00		TRANSISTOR: FET, N-CHAN, SI, TO-18	80009	151-1022-00
A42A1Q2074	151-1022-00		TRANSISTOR: FET, N-CHAN, SI, TO-18	80009	151-1022-00
A42A1Q3025	151-0290-00		TRANSISTOR: NPN, SI, TO-39	80009	151-0290-00
A42A1Q3061	151-1045-00		TRANSISTOR: FET, P-CHAN, SI, TO-92	04713	SPS628
A42A1Q3077	151-1066-00		TRANSISTOR: FET, P-CHAN, SI, TO-92	80009	151-1066-00
A42A1Q4025	151-0134-00		TRANSISTOR: PNP, SI, TO-39	04713	SM3195
A42A1Q4037	151-0301-00		TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A42A1Q5052	151-0429-00		TRANSISTOR: DARLINGTON, PNP, SI, TO-126	80009	151-0429-00
A42A1R1013	315-0273-00		RES, FXD, FILM: 27K OHM, 5%, 0.25W	57668	NTR25J-E27K0
A42A1R1017	321-0363-00		RES, FXD, FILM: 59.0K OHM, 1%, 0.125W, TC=TO	07716	CEAD59001F
A42A1R1018	321-0376-00		RES, FXD, FILM: 80.6K OHM, 1%, 0.125W, TC=TO	19701	5043ED80K60F
A42A1R1019	315-0105-00		RES, FXD, FILM: 1M OHM, 5%, 0.25W	19701	5043CX1M000J
A42A1R1021	321-1654-07		RES, FXD, FILM: 651K OHM, 0.1%, 0.125W, TC=T9	19701	5033RE651K08
A42A1R1022	325-0322-00		RES, FXD, FILM: 26.35K OHM, 0.1%, 0.3W	07088	K747 26.35 KOHM
A42A1R1023	325-0321-00		RES, FXD, FILM: 50.87K OHM, 0.05%, 0.3W	07088	K747 50.87 KOHM
A42A1R1024	325-0320-00		RES, FXD, FILM: 7.532K OHM, 0.05%, 0.3W	07088	K747 7.532 KOHM
A42A1R1025	321-0450-01		RES, FXD, FILM: 475K OHM, 0.5%, 0.125W, TC=TO MI	24546	NA55D4753D
A42A1R1026	325-0317-00		RES, FXD, FILM: 84.9K OHM, 0.1%, 0.3W	07088	K747 84.9 KOHM
A42A1R1027	315-0105-00		RES, FXD, FILM: 1M OHM, 5%, 0.25W	19701	5043CX1M000J
A42A1R1031	311-1319-00		RES, VAR, NONWW: TRMR, 10K OHM, 0.5W	32997	3006P-W84-103
A42A1R1032	325-0319-00		RES, FXD, FILM: 100K OHM, 0.1%, 0.3W	07088	K747 100.0 KOHM
A42A1R1033	321-0414-00		RES, FXD, FILM: 200K OHM, 1%, 0.125W, TC=TO	07716	CEAD20002F
A42A1R1034	315-0105-00		RES, FXD, FILM: 1M OHM, 5%, 0.25W	19701	5043CX1M000J
A42A1R1035	321-0510-00		RES, FXD, FILM: 2.00M OHM, 1%, 0.125W, TC=TO	03888	PME55D20003F
A42A1R1036	321-1653-04		RES, FXD, FILM: 2.25M OHM, 0.1%, 0.125W, TC=T2	91637	CMF55116D22503B
A42A1R1037	321-0405-00		RES, FXD, FILM: 162K OHM, 1%, 0.125W, TC=TO	07716	CEAD16202F
A42A1R1045	311-1319-00		RES, VAR, NONWW: TRMR, 10K OHM, 0.5W	32997	3006P-W84-103
A42A1R1049	311-1319-00		RES, VAR, NONWW: TRMR, 10K OHM, 0.5W	32997	3006P-W84-103
A42A1R1052	311-1337-00		RES, VAR, NONWW: TRMR, 25K OHM, 0.5W	32997	3006P-W84-253
A42A1R1054	311-1337-00		RES, VAR, NONWW: TRMR, 25K OHM, 0.5W	32997	3006P-W84-253
A42A1R1056	311-1337-00		RES, VAR, NONWW: TRMR, 25K OHM, 0.5W	32997	3006P-W84-253
A42A1R1061	311-1319-00		RES, VAR, NONWW: TRMR, 10K OHM, 0.5W	32997	3006P-W84-103

Component No.	Tektronix		Name & Description	Mfr. Code	Mfr. Part No.
	Part No.	Serial/Assembly No. Effective Dscnt			
A42A1R1063	311-1337-00		RES,VAR, NONNW: TRMR, 25K OHM, 0.5W	32997	3006P-W84-253
A42A1R1064	311-1337-00		RES,VAR, NONNW: TRMR, 25K OHM, 0.5W	32997	3006P-W84-253
A42A1R1065	311-1337-00		RES,VAR, NONNW: TRMR, 25K OHM, 0.5W	32997	3006P-W84-253
A42A1R1073	325-0318-00		RES,FXD, FILM: 95.7K OHM, 0.5%, 0.3W	07088	K747 95.7 KOHM
A42A1R1074	321-1652-04		RES,FXD, FILM: 375K OHM, 0.1%, 0.125W, TC=T2	91637	MFF1816D37502B
A42A1R1075	325-0325-00		RES,FXD, FILM: 35.97K OHM, 0.1%, 0.3W	07088	K747 35.97 KOHM
A42A1R1076	325-0328-00		RES,FXD, FILM: 141K OHM, 1%, 0.5W	18612	A104D 141KOHM 1%
A42A1R2012	315-0473-00		RES,FXD, FILM: 47K OHM, 5%, 0.25W	57668	NTR25J-E47K0
A42A1R2013	315-0473-00		RES,FXD, FILM: 47K OHM, 5%, 0.25W	57668	NTR25J-E47K0
A42A1R2014	321-0289-00		RES,FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=T0	19701	5033ED10K0F
A42A1R2015	321-0771-01		RES,FXD, FILM: 50 OHM, 0.5%, 0.125W, TC=T0	57668	RB14DXE 50E
A42A1R2021	325-0324-00		RES,FXD, FILM: 50K OHM, 0.1%, 0.3W	07088	K747 50.00 KOHM
A42A1R2022	315-0105-00		RES,FXD, FILM: 1M OHM, 5%, 0.25W	19701	5043CX1M000J
A42A1R2027	321-0319-00		RES,FXD, FILM: 20.5K OHM, 1%, 0.125W, TC=T0	19701	5033ED20K50F
A42A1R2036	321-0347-00		RES,FXD, FILM: 40.2K OHM, 1%, 0.125W, TC=T0	91637	CMF55116G40201F
A42A1R2062	321-0753-06		RES,FXD, FILM: 9K OHM, 0.25%, 0.125W, TC=T9	07716	CEAE90000C
A42A1R2063	321-0753-06		RES,FXD, FILM: 9K OHM, 0.25%, 0.125W, TC=T9	07716	CEAE90000C
A42A1R2064	315-0105-00		RES,FXD, FILM: 1M OHM, 5%, 0.25W	19701	5043CX1M000J
A42A1R2066	311-1264-00		RES,VAR, NONNW: TRMR, 1.5K OHM, 0.5W	32997	3329P-L58-152
A42A1R2069	321-0441-00		RES,FXD, FILM: 383K OHM, 1%, 0.125W, TC=T0	19701	5043ED383K0F
A42A1R2072	321-0449-00		RES,FXD, FILM: 464K OHM, 1%, 0.125W, TC=T0	19701	5043ED464K0F
A42A1R2073	321-0891-00		RES,FXD, FILM: 800K OHM, 1%, 0.125W, TC=T0	19701	5043ED800K0F
A42A1R2074	321-0415-00		RES,FXD, FILM: 205K OHM, 1%, 0.125W, TC=T0	07716	CEAD20502F
A42A1R2075	321-0995-00		RES,FXD, FILM: 549K OHM, 1%, 0.125W, TC=T0	24546	NA55D5493F
A42A1R2077	321-0432-00		RES,FXD, FILM: 309K OHM, 1%, 0.125W, TC=T0	07716	CEAD30902F
A42A1R2078	321-0441-00		RES,FXD, FILM: 383K OHM, 1%, 0.125W, TC=T0	19701	5043ED383K0F
A42A1R3011	315-0103-00		RES,FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A42A1R3012	315-0102-00		RES,FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A42A1R3013	315-0102-00		RES,FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A42A1R3014	321-0460-00		RES,FXD, FILM: 604K OHM, 1%, 0.125W, TC=T0	07716	CEAD60402F
A42A1R3021	321-0356-00		RES,FXD, FILM: 49.9K OHM, 1%, 0.125W, TC=T0	19701	5033ED49K90F
A42A1R3028	315-0101-00		RES,FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A42A1R3041	325-0316-00		RES,FXD, FILM: 57.55K OHM, 0.1%, 0.3W	07088	K747 57.55 KOHM
A42A1R3042	315-0102-00		RES,FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A42A1R3043	315-0202-00		RES,FXD, FILM: 2K OHM, 5%, 0.25W	57668	NTR25J-E 2K
A42A1R3044	321-0434-00		RES,FXD, FILM: 324K OHM, 1%, 0.125W, TC=T0	07716	CEAD32402F
A42A1R3045	321-0891-00		RES,FXD, FILM: 800K OHM, 1%, 0.125W, TC=T0	19701	5043ED800K0F
A42A1R3046	325-0319-00		RES,FXD, FILM: 100K OHM, 0.1%, 0.3W	07088	K747 100.0 KOHM
A42A1R3047	315-0102-00		RES,FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A42A1R3052	325-0315-00		RES,FXD, FILM: 20K OHM, 0.05%, 0.3W	07088	K747 20KOHM .05%
A42A1R3053	325-0315-00		RES,FXD, FILM: 20K OHM, 0.05%, 0.3W	07088	K747 20KOHM .05%
A42A1R3054	321-0320-00		RES,FXD, FILM: 21.0K OHM, 1%, 0.125W, TC=T0	19701	5033ED21K00F
A42A1R3055	321-0284-00		RES,FXD, FILM: 8.87K OHM, 1%, 0.125W, TC=T0	19701	5043ED8K870F
A42A1R3056	321-0357-03		RES,FXD, FILM: 51.1K OHM, 0.25%, 0.125W, TC=T2	07716	CEAC51101C
A42A1R3061	321-0451-00		RES,FXD, FILM: 487K OHM, 1%, 0.125W, TC=T0	19701	5043ED487K0F
A42A1R3072	315-0222-00		RES,FXD, FILM: 2.2K OHM, 5%, 0.25W	57668	NTR25J-E02K2
A42A1R4011	315-0103-00		RES,FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A42A1R4013	321-0440-00		RES,FXD, FILM: 374K OHM, 1%, 0.125W, TC=T0	07716	CEAD37402F
A42A1R4014	321-0642-00		RES,FXD, FILM: 20.3K OHM, 0.25%, 0.125W, T=T9	19701	5033RE20K30C
A42A1R4016	315-0113-00		RES,FXD, FILM: 11K OHM, 5%, 0.25W	19701	5043CX11K00J
A42A1R4030	315-0202-00		RES,FXD, FILM: 2K OHM, 5%, 0.25W	57668	NTR25J-E 2K
A42A1R4031	315-0104-00		RES,FXD, FILM: 10K OHM, 5%, 0.25W	57668	NTR25J-E100K
A42A1R4032	315-0273-00		RES,FXD, FILM: 27K OHM, 5%, 0.25W	57668	NTR25J-E27K0
A42A1R4040	315-0473-00		RES,FXD, FILM: 47K OHM, 5%, 0.25W	57668	NTR25J-E47K0
A42A1R4041	315-0470-00		RES,FXD, FILM: 47 OHM, 5%, 0.25W	57668	NTR25J-E47E0
A42A1R4042	315-0470-00		RES,FXD, FILM: 47 OHM, 5%, 0.25W	57668	NTR25J-E47E0
A42A1R4043	315-0470-00		RES,FXD, FILM: 47 OHM, 5%, 0.25W	57668	NTR25J-E47E0
A42A1R4044	315-0470-00		RES,FXD, FILM: 47 OHM, 5%, 0.25W	57668	NTR25J-E47E0

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A42A1R4048	315-0105-00		RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A42A1R4049	310-0705-00		RES,FXD,WW:3 OHM 0.25%,2W,TC=5PPM/DEG C	80009	310-0705-00
A42A1R4051	321-0238-00		RES,FXD,FILM:2.94K OHM,1%,0.125W,TC=T0	07716	CEAD29400F
A42A1R4052	321-0258-00		RES,FXD,FILM:4.75K OHM,1%,0.125W,TC=T0	19701	5033ED4K750F
A42A1R4054	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A42A1R4063	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A42A1R4064	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A42A1R5015	315-0242-00		RES,FXD,FILM:2.4K OHM,5%,0.25W	57668	NTR25J-E02K4
A42A1R5064	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A42A1R5065	315-0755-00		RES,FXD,FILM:7.5M OHM,5%,0.25W	19701	5043CX7M500J
A42A1R5066	315-0475-00		RES,FXD,FILM:4.7M OHM,5%,0.25W	01121	CB4755
A42A1U1011	156-0158-04		MICROCKT,LINER:DUAL OPNL AMPL	01295	MC1458JG
A42A1U1067	156-0937-00		MICROCKT,LINER:VOLTAGE REFERENCE	24355	AD580LH
A42A1U2028	156-0512-03		MICROCKT,LINER:OPNL AMPL	04713	LM308J-8
A42A1U2045	156-0512-03		MICROCKT,LINER:OPNL AMPL	04713	LM308J-8
A42A1U2047	156-0512-03		MICROCKT,LINER:OPNL AMPL	04713	LM308J-8
A42A1U2054	156-0420-00		MICROCKT,LINER:OPNL AMPL	27014	LM321H
A42A1U3054	156-0512-03		MICROCKT,LINER:OPNL AMPL	04713	LM308J-8
A42A1U4061	156-0385-02		MICROCKT,DGTL:HEX INVERTER,SCRN	80009	156-0385-02
A42A1U5022	156-0411-00		MICROCKT,LINER:SGL SPLY COMPARATOR	04713	LM339N
A42A1U5031	156-0913-02		MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A42A1U5036	156-0469-02		MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A42A1VR3011	152-0265-00		SEMICON DVC,DI:ZEN,SI,24V,5%,0.4W	04713	1N970B
A42A1VR3012	152-0281-00		SEMICON DVC,DI:ZEN,SI,22V,5%,0.4W,DO-7	12954	1N969B/DO-35
A42A1VR3061	152-0514-00		SEMICON DVC,DI:ZEN,SI,10V,1%,0.4W,DO-7	04713	SZG15RL
A42A1VR3074	152-0120-00		SEMICON DVC,DI:ZEN,SI,10V,5%,1W,A31A	04713	SZ1619
A42A1W3048	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A44	672-0158-00		CIRCUIT BD ASSY:1ST LO DRIVER	80009	672-0158-00
A44Q352	151-0415-00		TRANSISTOR:NPN,SI,TO-127	04713	SJE419
A44A1	670-9051-00		CIRCUIT BD ASSY:1ST LO DRIVER	80009	670-9051-00
A44A1C1011	283-0203-00		CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR305SC474MAA
A44A1C1018	283-0203-00		CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR305SC474MAA
A44A1C1020	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A44A1C1029	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A44A1C2011	290-0804-00		CAP,FXD,ELCTLT:10UF,+50-20%,25V	55680	ULB1E100TAAANA
A44A1C2017	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A44A1C2018	283-0330-00		CAP,FXD,CER DI:100PF,5%,50V	05397	C320C101J5R5CA
A44A1C2019	290-0804-00		CAP,FXD,ELCTLT:10UF,+50-20%,25V	55680	ULB1E100TAAANA
A44A1C2021	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A44A1C2022	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A44A1C2025	290-0301-00		CAP,FXD,ELCTLT:10UF,10%,20V	05397	T110B106K020AS
A44A1C2026	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A44A1C2032	283-0060-00		CAP,FXD,CER DI:100PF,5%,200V	59660	855-535U2J101J
A44A1C2042	283-0065-00		CAP,FXD,CER DI:0.001UF,5%,50V	59660	0835-591Y5E0102J
A44A1C2043	283-0213-00		CAP,FXD,CER DI:300PF,5%,100V	04222	3429-100A-301J
A44A1C2044	283-0198-00		CAP,FXD,CER DI:0.22UF,20%,50V	05397	C330C24M5U1CA
A44A1C2045	283-0005-00		CAP,FXD,CER DI:0.01UF,+100-0%,250V	04222	SR303E103ZAA
A44A1C2046	283-0060-00		CAP,FXD,CER DI:100PF,5%,200V	59660	855-535U2J101J
A44A1C2048	283-0212-00		CAP,FXD,CER DI:2UF,20%,50V	04222	SR405E205MAA
A44A1C2050	283-0195-00		CAP,FXD,CER DI:680PF,5%,50V	04222	SR205A681JAA
A44A1C2051	283-0005-00		CAP,FXD,CER DI:0.01UF,+100-0%,250V	04222	SR303E103ZAA
A44A1C2054	283-0060-00		CAP,FXD,CER DI:100PF,5%,200V	59660	855-535U2J101J
A44A1C2056	290-0302-00		CAP,FXD,ELCTLT:100UF,10%,20V	05397	T110D107K020MS
A44A1C3013	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A44A1C3019	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A44A1C3020	283-0175-00		CAP,FXD,CER DI:10PF,5%,200V	05397	C312C100D2G5CA 8
A44A1C3027	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA
A44A1C3033	283-0326-00		CAP,FXD,CER DI:0.082UF,10%,50V	04222	SR205C823KAA



Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A44A1C3034	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A44A1C3039	290-0574-00		CAP,FXD,ELCTLT:47UF,10%,20V	05397	T368C476K0202AS
A44A1C3045	290-0778-00		CAP,FXD,ELCTLT:1UF,20%,50V,NPLZD	54473	ECE-A50N1
A44A1C3046	290-0158-00		CAP,FXD,ELCTLT:50UF,+75-15%,25V	26769	40LW506B025U1A
A44A1C3047	290-0776-00		CAP,FXD,ELCTLT:22UF,+50-20%,10V	55680	ULA1A220TAA
A44A1C3048	283-0191-00		CAP,FXD,CER DI:0.022UF,20%,50V	04222	SR205C223MAA
A44A1C4014	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A44A1C4016	283-0177-00		CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A44A1C4046	290-0574-00		CAP,FXD,ELCTLT:47UF,10%,20V	05397	T368C476K0202AS
A44A1CR1052	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A44A1CR1053	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A44A1CR1054	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A44A1CR2024	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A44A1CR3014	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A44A1CR3031	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A44A1CR3044	152-0323-00		SEMICON DVC,DI:SW,SI,35V,0.1A,DO-7	14433	WG1518
A44A1CR3047	152-0333-00		SEMICON DVC,DI:SW,SI,55V,200MA,DO-35	07263	FDH-6012
A44A1K3034	148-0064-00		RELAY,REED:FORM A,110MA,28VDC	15636	RA-30231051-96
A44A1L4038	108-0881-00		COIL,RF:FIXED,40.1UH	80009	108-0881-00
A44A1L4041	108-0881-00		COIL,RF:FIXED,40.1UH	80009	108-0881-00
A44A1Q1028	151-0190-00		TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A44A1Q2025	151-0188-00		TRANSISTOR:PNP,SI,TO-92	80009	151-0188-00
A44A1Q2029	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A44A1Q2035	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A44A1Q2039	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A44A1Q2040	151-1022-00		TRANSISTOR:FET,N-CHAN,SI,TO-18	80009	151-1022-00
A44A1Q2045	151-0619-00		TRANSISTOR:NPN,DUAL,SIX LEAD,TO-5	27014	SL41341
A44A1Q2051	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A44A1Q2052	151-0619-00		TRANSISTOR:NPN,DUAL,SIX LEAD,TO-5	27014	SL41341
A44A1Q3019	151-1097-00		TRANSISTOR:FE,SI,TO-92	04713	SPF713
A44A1Q3028	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A44A1Q3047	151-1022-00		TRANSISTOR:FET,N-CHAN,SI,TO-18	80009	151-1022-00
A44A1R1011	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A44A1R1013	311-1240-00		RES,VAR,NONWW:TRMR,25K OHM,10%,0.5W	32997	3386X-T07-253
A44A1R1014	321-0363-00		RES,FXD,FILM:59.0K OHM,1%,0.125W,TC=TO	07716	CEAD59001F
A44A1R1015	321-0363-00		RES,FXD,FILM:59.0K OHM,1%,0.125W,TC=TO	07716	CEAD59001F
A44A1R1018	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A44A1R1019	321-0363-00		RES,FXD,FILM:59.0K OHM,1%,0.125W,TC=TO	07716	CEAD59001F
A44A1R1020	321-0001-00		RES,FXD,FILM:10 OHM,1%,0.125W,TC=TO	19701	5033RD10R00FMS
A44A1R1021	321-0222-00		RES,FXD,FILM:2.00K OHM,1%,0.125W,TC=TO	19701	5033ED2K00F
A44A1R1022	311-1240-00		RES,VAR,NONWW:TRMR,25K OHM,10%,0.5W	32997	3386X-T07-253
A44A1R1024	321-0162-00		RES,FXD,FILM:475 OHM,1%,0.125W,TC=TO	19701	5033ED475R0F
A44A1R1025	321-0162-00		RES,FXD,FILM:475 OHM,1%,0.125W,TC=TO	19701	5033ED475R0F
A44A1R1026	311-1240-00		RES,VAR,NONWW:TRMR,25K OHM,10%,0.5W	32997	3386X-T07-253
A44A1R1028	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A44A1R1029	321-0001-00		RES,FXD,FILM:10 OHM,1%,0.125W,TC=TO	19701	5033RD10R00FMS
A44A1R1030	317-0102-00		RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A44A1R1031	311-2168-00		RES,VAR,NONWW:TRMR,10K OHM,10%,0.5W	18612	1280G 10K OHM 1%
A44A1R1032	311-2168-00		RES,VAR,NONWW:TRMR,10K OHM,10%,0.5W	18612	1280G 10K OHM 1%
A44A1R1034	311-2168-00		RES,VAR,NONWW:TRMR,10K OHM,10%,0.5W	18612	1280G 10K OHM 1%
A44A1R1035	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A44A1R1036	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A44A1R1038	321-0289-07		RES,FXD,FILM:10.0K OHM,0.1%,0.125W,TC=T9	19701	5033RE10K00B
A44A1R1039	321-0273-00		RES,FXD,FILM:6.81K OHM,1%,0.125W,TC=TO	07716	CEAD68100F
A44A1R1040	310-0706-01		RES,FXD,WW:25 OHM,1%,11W,TC-3.5 PPM/DEG C	80009	310-0706-01
A44A1R1041	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A44A1R1042	321-0322-00		RES,FXD,FILM:22.1K OHM,0.1%,0.125W,TC=TO	19701	5033ED22K10F
A44A1R1043	321-0322-00		RES,FXD,FILM:22.1K OHM,0.1%,0.125W,TC=TO	19701	5033ED22K10F

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A44A1R1044	321-0090-00		RES,FXD,FILM:84.5 OHM,1%,0.125W,TC=TO	91637	CMF55116G84R50F
A44A1R1045	321-0207-00		RES,FXD,FILM:1.40K OHM,1%,0.125W,TC=TO	19701	5033ED1K400F
A44A1R1046	321-0373-00		RES,FXD,FILM:75.0K OHM,1%,0.125W,TC=TO	19701	5033ED75K00F
A44A1R1047	315-0472-00		RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A44A1R1048	315-0302-00		RES,FXD,FILM:3K OHM,5%,0.25W	57668	NTR25J-E03K0
A44A1R1049	321-0306-00		RES,FXD,FILM:15.0K OHM,1%,0.125W,TC=TO	19701	5033ED15J00F
A44A1R1050	321-0306-00		RES,FXD,FILM:15.0K OHM,1%,0.125W,TC=TO	19701	5033ED15J00F
A44A1R1051	321-0306-00		RES,FXD,FILM:15.0K OHM,1%,0.125W,TC=TO	19701	5033ED15J00F
A44A1R1052	321-0373-00		RES,FXD,FILM:75.0K OHM,1%,0.125W,TC=TO	19701	5033ED75K00F
A44A1R1053	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A44A1R1054	315-0200-00		RES,FXD,FILM:20 OHM,5%,0.25W	19701	5043CX20R00J
A44A1R1055	321-0163-00		RES,FXD,FILM:487 OHM,1%,0.125W,TC=TO	07716	CEAD487R0F
A44A1R2012	307-0542-00		RES NTWK,FXD,FI:(5)10K OHM,5%,0.125W	01121	106A1030R706A103
A44A1R2014	321-0383-00		RES,FXD,FILM:95.3K OHM,1%,0.125W,TC=TO	07716	CEAD95301F
A44A1R2015	321-0337-00		RES,FXD,FILM:31.6K OHM,1%,0.125W,TC=TO	07716	CEAD31601F
A44A1R2016	321-0222-00		RES,FXD,FILM:2.00K OHM,1%,0.125W,TC=TO	19701	5033ED2K00F
A44A1R2017	321-0001-00		RES,FXD,FILM:10 OHM,1%,0.125W,TC=TO	19701	5033RD10R00FMS
A44A1R2021	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A44A1R2022	321-0265-00		RES,FXD,FILM:5.62K OHM,1%,0.125W,TC=TO	19701	5043ED5K620F
A44A1R2022	321-0373-00		RES,FXD,FILM:75.0K OHM,1%,0.125W,TC=TO	19701	5033ED75K00F
A44A1R2023	315-0391-00		RES,FXD,FILM:390 OHM,5%,0.25W	57668	NTR25J-E390E
A44A1R2024	321-0193-00		RES,FXD,FILM:1K OHM,1%,0.125W,TC=TO	19701	5033ED1K00F
A44A1R2025	321-0001-00		RES,FXD,FILM:10 OHM,1%,0.125W,TC=TO	19701	5033RD10R00FMS
A44A1R2026	315-0472-00		RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A44A1R2027	321-0896-03		RES,FXD,FILM:9.8K OHM,0.25%,0.125W,TC=T2	19701	5033RE9K800C
A44A1R2029	315-0510-00		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A44A1R2031	321-0289-09		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=T9	19701	5033RE10K00F
A44A1R2036	325-0269-00		RES,FXD,FILM:22K OHM,1%,0.3W,TC=1PPM/DEG C	07088	K747 22K OHM 1%
A44A1R2037	325-0258-00		RES,FXD,FILM:5.62K OHM,0.25%,0.3W	07088	K747 5.62K OHM
A44A1R2041	325-0323-00		RES,FXD,FILM:10.88K OHM,0.5%,0.3W	07088	K747 10.88 KOHM
A44A1R2042	325-0326-00		RES,FXD,FILM:2.67K OHM,0.5%,0.3W	07088	K747 2.67 KOHM
A44A1R2043	325-0271-00		RES,FXD,FILM:51.1K OHM,0.25%,0.3W	07088	K747 51.1K OHM
A44A1R2044	315-0274-00		RES,FXD,FILM:270K OHM,5%,0.25W	57668	NTR25J-E270K
A44A1R2051	325-0326-00		RES,FXD,FILM:2.67K OHM,0.5%,0.3W	07088	K747 2.67 KOHM
A44A1R2052	325-0327-00		RES,FXD,FILM:4.72K OHM,0.5%,0.3W	07088	K747 4.72 KOHM
A44A1R2053	321-0263-00		RES,FXD,FILM:5.36K OHM,1%,0.125W,TC=TO	07716	CEAD53600F
A44A1R2054	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A44A1R3012	315-0203-00		RES,FXD,FILM:20K OHM,5%,0.25W	57668	NTR25J-E 20K
A44A1R3013	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A44A1R3014	321-0306-00		RES,FXD,FILM:15.0K OHM,1%,0.125W,TC=TO	19701	5033ED15J00F
A44A1R3015	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=TO	19701	5033ED10K0F
A44A1R3026	321-0001-00		RES,FXD,FILM:10 OHM,1%,0.125W,TC=TO	19701	5033RD10R00FMS
A44A1R3027	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A44A1R3028	315-0912-00		RES,FXD,FILM:9.1K OHM,5%,0.25W	57668	NTR25J-E09K1
A44A1R3031	315-0562-00		RES,FXD,FILM:5.6K OHM,5%,0.25W	57668	NTR25J-E05K6
A44A1R3032	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A44A1R3040	315-0154-00		RES,FXD,FILM:150K OHM,5%,0.25W	57668	NTR25J-E150K
A44A1R3046	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A44A1R3048	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A44A1R3049	315-0123-00		RES,FXD,FILM:12K OHM,5%,0.25W	57668	NTR25J-E12K0
A44A1R4012	315-0473-00		RES,FXD,FILM:47K OHM,5%,0.25W	57668	NTR25J-E47K0
A44A1R4014	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A44A1R4015	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A44A1R4016	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A44A1R4037	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A44A1R4038	307-0103-00		RES,FXD,CMPSN:2.7 OHM,5%,0.25W	01121	CB27G5
A44A1R4043	307-0103-00		RES,FXD,CMPSN:2.7 OHM,5%,0.25W	01121	CB27G5
A44A1R4044	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A44A1U1013	156-1160-00		MICROCKT,LINER:VOLTAGE REGULATOR	04713	MC78L12ACG
A44A1U1016	156-1256-00		MICROCKT,LINER:MONOLITHIC QUAD ANALOG	32293	IH5010CDD/CJD
A44A1U1018	156-1207-00		MICROCKT,LINER:VOLTAGE REGULATOR,-12 V	04713	MC79L12ACG
A44A1U1025	156-0158-04		MICROCKT,LINER:DUAL OPNL AMPL	01295	MC1458JG
A44A1U2018	156-0512-03		MICROCKT,LINER:OPNL AMPL	04713	LM308J-8
A44A1U2032	156-0512-03		MICROCKT,LINER:OPNL AMPL	04713	LM308J-8
A44A1U2043	156-0512-03		MICROCKT,LINER:OPNL AMPL	04713	LM308J-8
A44A1U2052	156-0512-03		MICROCKT,LINER:OPNL AMPL	04713	LM308J-8
A44A1U3014	156-0411-02		MICROCKT,LINER:QUAD COMPARATOR,SCREENED	04713	LM339JDS
A44A1U3022	156-0967-00		MICROCKT,LINER:D/A CONVERTER	24355	AD561J
A44A1U4017	156-0913-02		MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A44A1U4022	156-0913-02		MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A44A1U4024	156-0913-02		MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A44A1U4034	156-0469-02		MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A44A1VR1055	152-0526-00		SEMICON DVC,DI:ZEN,SI,6.35V,1%,0.4W,D0-7	14552	DT840615A
A44A1W1027	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A44A1W2034	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A44A1W2045	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A46	672-0165-00		CIRCUIT BD ASSY:CENTER FREQ CONTROL	80009	672-0165-00
A46A1	670-9094-01		CIRCUIT BD ASSY:CENTER FREQ CONT	80009	670-9094-01
A46A1C1029	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A46A1C1030	283-5002-00		CAP,FXD,CER DI:1000PF,10%,50V	14674	12061A102KAT050R
A46A1C1033	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A46A1C1043	285-0894-00		CAP,FXD,PLASTIC:5UF,5%,50V	14752	A650DIA505J
A46A1C1061	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A46A1C1065	283-5002-00		CAP,FXD,CER DI:1000PF,10%,50V	14674	12061A102KAT050R
A46A1C1066	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A46A1C2015	283-5001-00		CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A46A1C2037	290-5001-00		CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A46A1C2040	290-5001-00		CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A46A1C2043	290-5001-00		CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A46A1C2050	283-5001-00		CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A46A1C2069	290-5001-00		CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A46A1C2074	290-5001-00		CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A46A1C2076	285-0894-00		CAP,FXD,PLASTIC:5UF,5%,50V	14752	A650DIA505J
A46A1C3040	290-5001-00		CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A46A1C3045	290-5001-00		CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A46A1C3076	290-5001-00		CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A46A1CR1024	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A46A1CR1025	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A46A1CR1026	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A46A1CR1033	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A46A1CR1035	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A46A1CR1056	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A46A1CR1058	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A46A1CR1064	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A46A1CR1067	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A46A1CR1069	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A46A1L4055	108-0417-01		COIL,RF:FIXED,110UH	80009	108-0417-01
A46A1Q1024	151-5000-00		TRANSISTOR:PNP,SI,SOT-23	80009	151-5000-00
A46A1Q1058	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A46A1Q1061	151-5000-00		TRANSISTOR:PNP,SI,SOT-23	80009	151-5000-00
A46A1Q1065	151-5002-00		TRANSISTOR:JFET,N-CH,RDS=60	04713	MMBF4392T1
A46A1Q2017	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A46A1Q2031	151-5002-00		TRANSISTOR:JFET,N-CH,RDS=60	04713	MMBF4392T1
A46A1R1011	321-1741-00		RES SET,MATCHED:10K/10K OHM,1%,0.125W (MATCHED SET W/A46A1R1012)	TK1360	SPF-143-1
A46A1R1012	321-1741-00		RES SET,MATCHED:10K/10K OHM,1%,0.125W	TK1360	SPF-143-1

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A46A1R1013	321-1741-00		(MATCHED SET W/A46A1R1011) RES SET, MATCHED: 10K/10K OHM, 1%, 0.125W	TK1360	SPF-143-1
A46A1R1014	321-1741-00		(MATCHED SET W/A46A1R1014) RES SET, MATCHED: 10K/10K OHM, 1%, 0.125W	TK1360	SPF-143-1
A46A1R1015	321-1742-00		(MATCHED SET W/A46A1R1013) RES SET, MATCHED: 5K/10K/10.5K OHM, 1%, 0.125W	TK1360	SPF-143-2
A46A1R1016	321-1742-00		(MATCHED SET W/A46A1R1016, A46A1R1020) RES SET, MATCHED: 5K/10K/10.5K OHM, 1%, 0.125W	TK1360	SPF-143-2
A46A1R1020	321-1742-00		(MATCHED SET W/A46A1R1015, A46A1R1020) RES SET, MATCHED: 5K/10K/10.5K OHM, 1%, 0.125W	TK1360	SPF-143-2
A46A1R1021	321-5030-00		(MATCHED SET W/A46A1R1015, A46A1R1016) RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A46A1R1022	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A46A1R1023	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A46A1R1024	321-5038-00		RES, FXD, FILM: 47.5K, 1%, 0.125W	01121	BCK4752FT
A46A1R1025	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A46A1R1026	321-5011-00		RES, FXD, FILM: 274 OHM, 1%, 0.125W	01121	BCK2740FT
A46A1R1027	321-5018-00		RES, FXD, FILM: 1.00K, 1%, 0.125W	01121	BCK1001FT
A46A1R1028	311-1238-00		RES, VAR, NONWW: TRMR, 5K OHM, 0.5W	32997	3386X-DY6-502
A46A1R1029	321-5047-00		RES, FXD, FILM: 100K, 1%, 0.125W	01121	BCK1003FT
A46A1R1030	321-5049-00		RES, FXD, FILM: 1 MEG, 1%, 0.125W	01121	BCK1004FT
A46A1R1031	321-5049-00		RES, FXD, FILM: 1 MEG, 1%, 0.125W	01121	BCK1004FT
A46A1R1032	311-1336-00		RES, VAR, NONWW: TRMR, 100K OHM, 0.75W	02111	43P104T672
A46A1R1033	321-5049-00		RES, FXD, FILM: 1 MEG, 1%, 0.125W	01121	BCK1004FT
A46A1R1034	321-5018-00		RES, FXD, FILM: 1.00K, 1%, 0.125W	01121	BCK1001FT
A46A1R1035	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A46A1R1036	321-0604-00		RES, FXD, FILM: 30K OHM, 0.25%, 0.125W, TC=T2	19701	5033RC30K00C
A46A1R1039	321-5006-00		RES, FXD, FILM: 100 OHM, 1%, 0.125W	01121	BCK1000FT
A46A1R1048	321-1741-00		RES SET, MATCHED: 10K/10K OHM, 1%, 0.125W	TK1360	SPF-143-1
A46A1R1049	321-1741-00		(MATCHED SET W/A46A1R1049) RES SET, MATCHED: 10K/10K OHM, 1%, 0.125W	TK1360	SPF-143-1
A46A1R1050	321-1741-00		(MATCHED SET W/A46A1R1048) RES SET, MATCHED: 10K/10K OHM, 1%, 0.125W	TK1360	SPF-143-1
A46A1R1051	321-1741-00		(MATCHED SET W/A46A1R1051) RES SET, MATCHED: 10K/10K OHM, 1%, 0.125W	TK1360	SPF-143-1
A46A1R1052	321-1742-00		(MATCHED SET W/A46A1R1050) RES SET, MATCHED: 5K/10K/10.5K OHM, 1%, 0.125W	TK1360	SPF-143-2
A46A1R1053	321-1742-00		(MATCHED SET W/A46A1R1053, A46A1R1055) RES SET, MATCHED: 5K/10K/10.5K OHM, 1%, 0.125W	TK1360	SPF-143-2
A46A1R1054	321-5030-00		(MATCHED SET W/A46A1R1052, A46A1R1055) RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A46A1R1055	321-1742-00		RES SET, MATCHED: 5K/10K/10.5K OHM, 1%, 0.125W	TK1360	SPF-143-2
A46A1R1056	321-5038-00		(MATCHED SET W/A46A1R1052, A46A1R1053) RES, FXD, FILM: 47.5K, 1%, 0.125W	01121	BCK4752FT
A46A1R1057	321-5006-00		RES, FXD, FILM: 100 OHM, 1%, 0.125W	01121	BCK1000FT
A46A1R1058	321-5018-00		RES, FXD, FILM: 1.00K, 1%, 0.125W	01121	BCK1001FT
A46A1R1059	321-5011-00		RES, FXD, FILM: 274 OHM, 1%, 0.125W	01121	BCK2740FT
A46A1R1061	321-5018-00		RES, FXD, FILM: 1.00K, 1%, 0.125W	01121	BCK1001FT
A46A1R1062	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A46A1R1063	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A46A1R1064	321-5047-00		RES, FXD, FILM: 100K, 1%, 0.125W	01121	BCK1003FT
A46A1R1065	321-5049-00		RES, FXD, FILM: 1 MEG, 1%, 0.125W	01121	BCK1004FT
A46A1R1066	321-5049-00		RES, FXD, FILM: 1 MEG, 1%, 0.125W	01121	BCK1004FT
A46A1R1067	321-5049-00		RES, FXD, FILM: 1 MEG, 1%, 0.125W	01121	BCK1004FT
A46A1R1068	321-5018-00		RES, FXD, FILM: 1.00K, 1%, 0.125W	01121	BCK1001FT
A46A1R1070	321-0385-00		RES, FXD, FILM: 100K OHM, 1%, 0.125W, TC=T0	19701	5033ED100K0F
A46A1R1073	321-5006-00		RES, FXD, FILM: 100 OHM, 1%, 0.125W	01121	BCK1000FT
A46A1R2017	321-5006-00		RES, FXD, FILM: 100 OHM, 1%, 0.125W	01121	BCK1000FT
A46A1R2019	321-5018-00		RES, FXD, FILM: 1.00K, 1%, 0.125W	01121	BCK1001FT
A46A1R2028	321-5000-00		RES, FXD, FILM: 10 OHM, 1%, 0.125W	57668	MCR18EZHFW10E

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscort	Name & Description	Mfr. Code	Mfr. Part No.
A46A1R2029	321-5000-00		RES,FXD,FILM:10 OHM,1%,0.125W	57668	MCR18EZHFW10E
A46A1R2038	321-5043-00		RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A46A1R2039	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A46A1R2046	321-5043-00		RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A46A1R2059	321-5000-00		RES,FXD,FILM:10 OHM,1%,0.125W	57668	MCR18EZHFW10E
A46A1R2060	321-5000-00		RES,FXD,FILM:10 OHM,1%,0.125W	57668	MCR18EZHFW10E
A46A1R2061	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A46A1R2067	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A46A1R2069	321-5043-00		RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A46A1R2074	321-5043-00		RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A46A1R3040	311-1238-00		RES,VAR,NONW:TRMR,5K OHM,0.5W	32997	3386X-DY6-502
A46A1R3075	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A46A1R4040	311-1241-00		RES,VAR,NONW:TRMR,100K OHM,0.5W	32997	3386X-T07-104
A46A1R4062	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A46A1R4063	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A46A1U1030	156-1851-00		MICROCKT,LINER:OPERATIONAL AMPLIFIER,SCRN	06665	OP-27BIGZ
A46A1U1035	156-1582-00		MICROCKT,LINER:OPERATIONAL AMPL,BIPOLAR	80009	156-1582-00
A46A1U1055	156-5000-00		MICROCKT,LINER:VOLTAGE COMPARATOR	04713	LM311D
A46A1U1065	156-1851-00		MICROCKT,LINER:OPERATIONAL AMPLIFIER,SCRN	06665	OP-27BIGZ
A46A1U2010	156-1851-00		MICROCKT,LINER:OPERATIONAL AMPLIFIER,SCRN	06665	OP-27BIGZ
A46A1U2015	156-1851-00		MICROCKT,LINER:OPERATIONAL AMPLIFIER,SCRN	06665	OP-27BIGZ
A46A1U2019	156-5000-00		MICROCKT,LINER:VOLTAGE COMPARATOR	04713	LM311D
A46A1U2020	156-1548-01		MICROCKT,INTFC:CMOS,D/A CONVERTER,12 BIT,CU RRENT OUT,MULTIPLYING,AD7541AJN,DIP18.3	51640	AD7541AJN
A46A1U2030	156-1548-01		MICROCKT,INTFC:CMOS,D/A CONVERTER,12 BIT,CU RRENT OUT,MULTIPLYING,AD7541AJN,DIP18.3	51640	AD7541AJN
A46A1U2045	156-1851-00		MICROCKT,LINER:OPERATIONAL AMPLIFIER,SCRN	06665	OP-27BIGZ
A46A1U2050	156-1851-00		MICROCKT,LINER:OPERATIONAL AMPLIFIER,SCRN	06665	OP-27BIGZ
A46A1U2055	156-1548-01		MICROCKT,INTFC:CMOS,D/A CONVERTER,12 BIT,CU RRENT OUT,MULTIPLYING,AD7541AJN,DIP18.3	51640	AD7541AJN
A46A1U2060	156-1548-01		MICROCKT,INTFC:CMOS,D/A CONVERTER,12 BIT,CU RRENT OUT,MULTIPLYING,AD7541AJN,DIP18.3	51640	AD7541AJN
A46A1U2070	156-1582-00		MICROCKT,LINER:OPERATIONAL AMPL,BIPOLAR	80009	156-1582-00
A46A1U3015	156-5035-00		MICROCKT,DGTL:LSTTL,OCTAL D FF	18324	N74LS374D
A46A1U3025	156-5035-00		MICROCKT,DGTL:LSTTL,OCTAL D FF	18324	N74LS374D
A46A1U3035	156-5035-00		MICROCKT,DGTL:LSTTL,OCTAL D FF	18324	N74LS374D
A46A1U3050	156-5035-00		MICROCKT,DGTL:LSTTL,OCTAL D FF	18324	N74LS374D
A46A1U3060	156-5035-00		MICROCKT,DGTL:LSTTL,OCTAL D FF	18324	N74LS374D
A46A1U3070	156-5035-00		MICROCKT,DGTL:LSTTL,OCTAL D FF	18324	N74LS374D
A46A1U4015	156-5032-00		MICROCKT,DGTL:LSTTL,QUAD 2 INP NOR GATE	18324	N74LS02D
A46A1U4025	156-5035-00		MICROCKT,DGTL:LSTTL,OCTAL D FF	18324	N74LS374D
A46A1U4035	156-5034-00		MICROCKT,DGTL:LSTTL,OCTAL BFR W/3 STATE OUT	18324	N74LS244D
A46A1U4045	156-5033-00		MICROCKT,DGTL:LSTTL,3 TO 8 LINE DCDR/DEMUX	18324	74LS138D
A46A1U4060	156-5032-00		MICROCKT,DGTL:LSTTL,QUAD 2 INP NOR GATE	18324	N74LS02D
A48	672-0157-00		CIRCUIT BD ASSY:SPAN ATTENUATOR	80009	672-0157-00
A48A1	670-5550-01		CIRCUIT BD ASSY:SPAN ATTENUATOR	80009	670-5550-01
A48A1C1013	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C1014	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C1019	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C1023	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C1024	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C1027	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C1029	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C1032	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C1034	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C1036	290-0535-00		CAP,FXD,ELCTL:33UF,20%,10V TANTALUM	56289	196D336X0010KA1
A48A1C1058	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C2024	283-0359-00		CAP,FXD,CER DI:1000PF,10%,200V	04222	SR212A102KAA

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A48A1C2026	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C2035	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C2036	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C2037	283-0672-00		CAP,FXD,MICA DI:200PF,1%,500V	00853	D155F2010FO
A48A1C2042	281-0525-00		CAP,FXD,CER DI:470PF,+/-94PF,500V	52763	2RDPLZ007 470PMO
A48A1C2044	281-0523-00		CAP,FXD,CER DI:100PF,20%,350V	52763	2RDPLZ007 100PMU
A48A1C2050	283-0330-00		CAP,FXD,CER DI:100PF,5%,50V	05397	C320C101J5R5CA
A48A1C2052	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C3031	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C3032	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C4035	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C4038	290-0158-00		CAP,FXD,ELCTLT:50UF,+75-15%,25V	26769	40LW506B025U1A
A48A1C4056	290-0574-00		CAP,FXD,ELCTLT:47UF,10%,20V	05397	T368C476K0202AS
A48A1C5018	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A48A1C5038	290-0158-00		CAP,FXD,ELCTLT:50UF,+75-15%,25V	26769	40LW506B025U1A
A48A1C5048	290-0574-00		CAP,FXD,ELCTLT:47UF,10%,20V	05397	T368C476K0202AS
A48A1C5055	290-0722-00		CAP,FXD,ELCTLT:100 UF,20%,10V	56289	196D107X0010PE3
A48A1CR1049	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR1051	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR1056	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR1061	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR2051	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR2053	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR3056	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR4056	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR4062	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR4068	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1CR4069	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A48A1K3065	148-0079-00		RELAY,REED:2 FORM A,110MA,28VDC,COIL 5VDC	15636	RA30382051-99
A48A1K3075	148-0079-00		RELAY,REED:2 FORM A,110MA,28VDC,COIL 5VDC	15636	RA30382051-99
A48A1K4055	148-0064-00		RELAY,REED:FORM A,110MA,28VDC	15636	RA-30231051-96
A48A1K4062	148-0064-00		RELAY,REED:FORM A,110MA,28VDC	15636	RA-30231051-96
A48A1K4072	148-0079-00		RELAY,REED:2 FORM A,110MA,28VDC,COIL 5VDC	15636	RA30382051-99
A48A1L4048	108-0881-00		COIL,RF:FIXED,40.1UH	80009	108-0881-00
A48A1L4053	108-0417-01		COIL,RF:FIXED,110UH	80009	108-0417-01
A48A1L4055	108-0881-00		COIL,RF:FIXED,40.1UH	80009	108-0881-00
A48A1Q2023	151-0301-00		TRANSISTOR:P,NP,SI,TO-18	80009	151-0301-00
A48A1Q2025	151-1022-00		TRANSISTOR:FET,N-CHAN,SI,TO-18	80009	151-1022-00
A48A1Q2028	151-1022-00		TRANSISTOR:FET,N-CHAN,SI,TO-18	80009	151-1022-00
A48A1Q2062	151-0390-00		TRANSISTOR:DARLINGTON,NPN,SI	04713	SPS34140RMP5U45
A48A1Q3056	151-0391-00		TRANSISTOR:DARLINGTON,P,NP,SI	04713	SPS6867K
A48A1R1013	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R1014	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R1019	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R1023	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R1024	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R1027	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R1032	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R1033	315-0472-00		RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A48A1R1034	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A48A1R1046	315-0106-00		RES,FXD,FILM:10M OHM,5%,0.25W	01121	CB1065
A48A1R1052	315-0431-00		RES,FXD,FILM:430 OHM,5%,0.25W	19701	5043CX430R0J
A48A1R1054	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A48A1R1056	321-0222-00		RES,FXD,FILM:2.00K OHM,1%,0.125W,TC=TO	19701	5033ED2K00F
A48A1R1058	315-0300-00		RES,FXD,FILM:30 OHM,5%,0.25W	19701	5043CX30R00J
A48A1R1059	315-0300-00		RES,FXD,FILM:30 OHM,5%,0.25W	19701	5043CX30R00J
A48A1R1063	311-1336-00		RES,VAR,NONWW:TRMR,100K OHM,0.75W	02111	43P104T672
A48A1R1065	311-1339-00		RES,VAR,NONWW:TRMR,5K OHM,0.75W	02111	43P502T672

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A48AIR1067	311-1339-00		RES, VAR, NONWV: TRMR, 5K OHM, 0.75W	02111	43P502T672
A48AIR1071	311-1339-00		RES, VAR, NONWV: TRMR, 5K OHM, 0.75W	02111	43P502T672
A48AIR1077	321-0001-00		RES, FXD, FILM: 10 OHM, 1%, 0.125W, TC=T0	19701	5033RD10R00FMS
A48AIR2019	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A48AIR2022	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A48AIR2035	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A48AIR2036	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A48AIR2038	321-0306-00		RES, FXD, FILM: 15.0K OHM, 1%, 0.125W, TC=T0	19701	5033ED15J00F
A48AIR2044	321-0299-00		RES, FXD, FILM: 12.7K OHM, 1%, 0.125W, TC=T0	19701	5033ED12K70F
A48AIR2046	315-0512-00		RES, FXD, FILM: 5.1K OHM, 5%, 0.25W	57668	NTR25J-E05K1
A48AIR2048	315-0203-00		RES, FXD, FILM: 20K OHM, 5%, 0.25W	57668	NTR25J-E 20K
A48AIR2049	315-0431-00		RES, FXD, FILM: 430 OHM, 5%, 0.25W	19701	5043CX430R0J
A48AIR2050	315-0431-00		RES, FXD, FILM: 430 OHM, 5%, 0.25W	19701	5043CX430R0J
A48AIR2051	315-0102-00		RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A48AIR2053	315-0203-00		RES, FXD, FILM: 20K OHM, 5%, 0.25W	57668	NTR25J-E 20K
A48AIR2066	308-0756-00		RES, FXD, WV: 100 OHM, 1%, 3W	14193	SA31-1000F
A48AIR2068	321-0754-07		RES, FXD, FILM: 900 OHM, 0.1%, 0.125W, TC=T9	19701	5033RE900R0B
A48AIR2072	321-0895-07		RES, FXD, FILM: 90 OHM, 0.1%, 0.125W, TC=T9	57668	RB14 BZE 90E
A48AIR2074	321-0895-07		RES, FXD, FILM: 90 OHM, 0.1%, 0.125W, TC=T9	57668	RB14 BZE 90E
A48AIR2076	321-0001-00		RES, FXD, FILM: 10 OHM, 1%, 0.125W, TC=T0	19701	5033RD10R00FMS
A48AIR3022	315-0475-00		RES, FXD, FILM: 4.7M OHM, 5%, 0.25W	01121	CB4755
A48AIR3024	315-0105-00		RES, FXD, FILM: 1M OHM, 5%, 0.25W	19701	5043CX1M000J
A48AIR3026	315-0104-00		RES, FXD, FILM: 100K OHM, 5%, 0.25W	57668	NTR25J-E100K
A48AIR3028	321-0306-00		RES, FXD, FILM: 15.0K OHM, 1%, 0.125W, TC=T0	19701	5033ED15J00F
A48AIR3029	315-0153-00		RES, FXD, FILM: 15K OHM, 5%, 0.25W	19701	5043CX15K00J
A48AIR3036	321-0289-00		RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=T0	19701	5033ED10K0F
A48AIR3038	321-0289-00		RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=T0	19701	5033ED10K0F
A48AIR3042	321-0299-00		RES, FXD, FILM: 12.7K OHM, 1%, 0.125W, TC=T0	19701	5033ED12K70F
A48AIR3044	321-0289-00		RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=T0	19701	5033ED10K0F
A48AIR3046	321-0299-00		RES, FXD, FILM: 12.7K OHM, 1%, 0.125W, TC=T0	19701	5033ED12K70F
A48AIR3047	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A48AIR3048	321-0289-00		RES, FXD, FILM: 10.0K OHM, 1%, 0.125W, TC=T0	19701	5033ED10K0F
A48AIR4032	315-0102-00		RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A48AIR4034	315-0102-00		RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A48AIR4035	315-0102-00		RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A48AIR4036	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A48AIR4037	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A48AIR4038	315-0103-00		RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A48AIR4056	315-0470-00		RES, FXD, FILM: 47 OHM, 5%, 0.25W	57668	NTR25J-E47E0
A48AIR4064	321-0001-00		RES, FXD, FILM: 10 OHM, 1%, 0.125W, TC=T0	19701	5033RD10R00FMS
A48AIR4065	321-0754-07		RES, FXD, FILM: 900 OHM, 0.1%, 0.125W, TC=T9	19701	5033RE900R0B
A48AIR4066	321-0895-07		RES, FXD, FILM: 90 OHM, 0.1%, 0.125W, TC=T9	57668	RB14 BZE 90E
A48AIR5052	315-0470-00		RES, FXD, FILM: 47 OHM, 5%, 0.25W	57668	NTR25J-E47E0
A48AIR5058	322-0043-00		RES, FXD, FILM: 27.4 OHM, 1%, 0.25W, TC=T0	91637	CMF55116
A48AIR5068	321-0097-00		RES, FXD, FILM: 100 OHM, 1%, 0.125W, TC=T0	91637	CMF55116G100ROF
A48AIU1025	156-0913-02		MICROCKT, DGTL: OCTAL D FF W/ENABLE, SCRN	80009	156-0913-02
A48AIU1042	156-0719-00		MICROCKT, LINEAR: CMOS, 10 BIT MULTIPLYING DAC	24355	AD7533LN
A48AIU2015	156-0913-02		MICROCKT, DGTL: OCTAL D FF W/ENABLE, SCRN	80009	156-0913-02
A48AIU2042	156-0512-03		MICROCKT, LINEAR: OPNL AMPL	04713	LM308J-8
A48AIU3025	156-1256-00		MICROCKT, LINEAR: MONOLITHIC QUAD ANALOG	32293	IH5010CDD/CJD
A48AIU3032	156-0512-03		MICROCKT, LINEAR: OPNL AMPL	04713	LM308J-8
A48AIU3036	156-0512-03		MICROCKT, LINEAR: OPNL AMPL	04713	LM308J-8
A48AIU4015	156-0956-02		MICROCKT, DGTL: OCTAL BFR W/3 STATE OUT, SCRN	80009	156-0956-02
A48AIU4025	156-0541-02		MICROCKT, DGTL: DUAL 2-TO 4-LINE DCDR/DEMUX	80009	156-0541-02
A48AIU4042	156-0140-00		MICROCKT, DGTL: TTL, HEX BUFFER/DRIVER	01295	SN7417N
A48AIU5025	156-0469-02		MICROCKT, DGTL: 3/8 LINE DCDR, SCRN	80009	156-0469-02
A48AIR1044	152-0514-00		SEMICONV DVC, DI: ZEN, SI, 10V, 1%, 0.4W, DO-7	04713	SZG15RL
A50	119-1992-02	8010100 8010129	PHASE LOCK ASSY:	80009	119-1992-02

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A50	119-1992-03	8010130	PHASE LOCK ASSY:	80009	119-1992-03
A50A1	670-5519-01		CIRCUIT BD ASSY:SYNTHESIZER	80009	670-5519-01
A50A1C1010	283-0203-00		CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR305SC474MAA
A50A1C1030	283-0032-00		CAP,FXD,CER DI:470PF,5%,500V	59660	831-000-Z5E0471J
A50A1C1040	283-0177-00		CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A1C2010	283-0032-00		CAP,FXD,CER DI:470PF,5%,500V	59660	831-000-Z5E0471J
A50A1C2020	283-0032-00		CAP,FXD,CER DI:470PF,5%,500V	59660	831-000-Z5E0471J
A50A1C2021	283-0177-00		CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A1C2040	283-0032-00		CAP,FXD,CER DI:470PF,5%,500V	59660	831-000-Z5E0471J
A50A1C2050	283-0177-00		CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A1C2051	290-0513-00		CAP,FXD,ELCTLT:510UF,+75-10%,25V	26769	40EW517C015U1A
A50A1C3029	283-0156-00		CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A50A1C3030	283-0010-00		CAP,FXD,CER DI:0.05UF,+80-20%,50V	04222	SR305E503ZAA
A50A1C3031	283-0032-00		CAP,FXD,CER DI:470PF,5%,500V	59660	831-000-Z5E0471J
A50A1L3029	108-0311-00		COIL,RF:FIXED,150NH	TK1345	108-0311-00
A50A1Q3040	151-0188-00		TRANSISTOR:PNP,SI,TO-92	80009	151-0188-00
A50A1Q3041	151-0188-00		TRANSISTOR:PNP,SI,TO-92	80009	151-0188-00
A50A1R1040	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A50A1R2040	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A50A1R2041	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A50A1R2042	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A50A1R2043	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A50A1R2044	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A50A1R3020	315-0391-00		RES,FXD,FILM:390 OHM,5%,0.25W	57668	NTR25J-E390E
A50A1R3021	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A50A1R3022	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A50A1R3023	315-0241-00		RES,FXD,FILM:240 OHM,5%,0.25W	19701	5043CX240R0J
A50A1R3040	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A50A1R3041	315-0471-00		RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A50A1R3042	315-0471-00		RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A50A1R3043	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A50A1R3050	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A50A1R3051	315-0201-00		RES,FXD,FILM:200 OHM,5%,0.25W	57668	NTR25J-E200E
A50A1U1010	156-0277-00		MICROCKT,LINEAR-VOLTAGE REGULATOR	04713	LM340T-5.0
A50A1U1020	156-0844-02		MICROCKT,DGTL:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A(NP3)
A50A1U1030	156-0844-02		MICROCKT,DGTL:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A(NP3)
A50A1U1040	156-0331-03		MICROCKT,DGTL:DUAL D TYPE POSITIVE EDGE	01295	SN74S74NP3
A50A1U2010	156-0844-02		MICROCKT,DGTL:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A(NP3)
A50A1U2020	156-0796-01		MICROCKT,DGTL:8 STG SHF & STORE BUS RGTR	02735	CD4094BFX
A50A1U2030	156-0796-01		MICROCKT,DGTL:8 STG SHF & STORE BUS RGTR	02735	CD4094BFX
A50A1U3030	156-0230-02		MICROCKT,DGTL:ECL,DUAL D-TYPE M/S FF	04713	MC10131LD
A50A2	670-9068-00		CIRCUIT BD ASSY:STROBE DRIVER	80009	670-9068-00
A50A2C1014	290-5001-00		CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A50A2C1030	290-5000-00		CAP,FXD,ELCTLT:1UF,20%,50V	TK0900	S50V1MICROF
A50A2C1035	283-5010-00		CAP,FXD,CER DI:0.22UF,10%,25V	95275	VJ1210YR22KXA
A50A2C1036	283-5010-00		CAP,FXD,CER DI:0.22UF,10%,25V	95275	VJ1210YR22KXA
A50A2C1040	283-5002-00		CAP,FXD,CER DI:1000PF,10%,50V	14674	12061A102KAT050R
A50A2C1041	283-5003-00		CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A50A2C1042	283-5010-00		CAP,FXD,CER DI:0.22UF,10%,25V	95275	VJ1210YR22KXA
A50A2C1043	283-5010-00		CAP,FXD,CER DI:0.22UF,10%,25V	95275	VJ1210YR22KXA
A50A2C1045	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A50A2C1048	283-5001-00		CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A50A2C1049	283-5001-00		CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A50A2C1060	283-5000-00		CAP,FXD,CER DI:10PF,5%,50V	95275	VJ1206A100JXA
A50A2C1062	283-5000-00		CAP,FXD,CER DI:10PF,5%,50V	95275	VJ1206A100JXA
A50A2C1064	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A50A2C1065	283-5010-00		CAP,FXD,CER DI:0.22UF,10%,25V	95275	VJ1210YR22KXA
A50A2C1066	283-5010-00		CAP,FXD,CER DI:0.22UF,10%,25V	95275	VJ1210YR22KXA



Component No.	Tektronix	Serial/Assembly No.		Name & Description	Mfr.	Mfr. Part No.
	Part No.	Effective	Dscont		Code	
A50A2C1067	283-5000-00			CAP,FXD,CER DI:10PF,5%,50V	95275	VJ1206A100JXA
A50A2C1068	283-5011-00			CAP,FXD,CER DI:33PF,5%,50V	95275	VJ1206A330JXA
A50A2C2092	283-0107-00			CAP,FXD,CER DI:51PF,5%,200V	04222	SR206A510JAA
A50A2FL1024	119-1029-00			FILTER,BANDPASS:5.00674 TO 5.0188 MHZ	80009	119-1029-00
A50A2L1015	108-5003-00			RES,FXD,WW:1000HM,5%,2.5W,SMD	54583	NL453232T-120K
A50A2L1035	108-5003-00			RES,FXD,WW:1000HM,5%,2.5W,SMD	54583	NL453232T-120K
A50A2Q1040	151-5001-00			TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A50A2Q1045	151-5002-00			TRANSISTOR:JFET,N-CH,RDS=60	04713	MMBF4392T1
A50A2R1040	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A50A2R1042	321-5003-00			RES,FXD,FILM:18.2 OHM,1%,0.125W	57668	MCR18EZHPW 18E2
A50A2R1043	321-5043-00			RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A50A2R1044	321-5043-00			RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A50A2R1045	321-5018-00			RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A50A2R1046	321-5008-00			RES,FXD,FILM:150 OHM,1%,0.125W	01121	BCK1500FT
A50A2R1048	321-5029-00			RES,FXD,FILM:8.25K,1%,0.125W	01121	BCK8251FT
A50A2R1062	321-5003-00			RES,FXD,FILM:18.2 OHM,1%,0.125W	57668	MCR18EZHPW 18E2
A50A2R1063	321-5009-00			RES,FXD,FILM:182 OHM,1%,0.125W	01121	BCK1820FT
A50A2R1065	321-5000-00			RES,FXD,FILM:10 OHM,1%,0.125W	57668	MCR18EZHPW10E
A50A2R1068	321-5014-00			RES,FXD,FILM:475 OHM,1%,0.125W	01121	BCK4750FT
A50A2U1015	156-5031-00			MICROCKT,DGTL:STTL,4-BIT UP/DOWN SYN COUNTE R	18324	N74S169AD
A50A2U1035	156-5030-00			MICROCKT,DGTL:STTL,QUAD TWO INPUT AND GATE	18324	N74S08D
A50A2U1036	156-0991-00			MICROCKT,LINEAR:VOLTAGE REGULATOR	04713	MC78L05ACP
A50A3	670-5522-02			CIRCUIT BD ASSY:OFFSET MIXER	80009	670-5522-02
A50A3C1021	283-0203-00			CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR305SC474MAA
A50A3C1030	290-0527-00			CAP,FXD,ELCTLT:15UF,20%,20V	05397	T368B156M020AS
A50A3C1031	283-0010-00			CAP,FXD,CER DI:0.05UF,+80-20%,50V	04222	SR305E503ZAA
A50A3C1040	283-0203-00			CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR305SC474MAA
A50A3C1050	283-0010-00			CAP,FXD,CER DI:0.05UF,+80-20%,50V	04222	SR305E503ZAA
A50A3C2012	283-0010-00			CAP,FXD,CER DI:0.05UF,+80-20%,50V	04222	SR305E503ZAA
A50A3C2020	283-0010-00			CAP,FXD,CER DI:0.05UF,+80-20%,50V	04222	SR305E503ZAA
A50A3C2041	283-0010-00			CAP,FXD,CER DI:0.05UF,+80-20%,50V	04222	SR305E503ZAA
A50A3C2050	290-0513-00			CAP,FXD,ELCTLT:510UF,+75-10%,25V	26769	40EW517C015U1A
A50A3CR1010	152-0322-00			SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,00-35	50434	5082-2672
A50A3CR1011	152-0322-00			SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,00-35	50434	5082-2672
A50A3CR2010	152-0322-00			SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,00-35	50434	5082-2672
A50A3L2020	108-0226-00			COIL,RF:FIXED,100UH	76493	B4257
A50A3Q1020	151-0301-00			TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A50A3Q1030	151-0301-00			TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A50A3Q1040	151-0302-00			TRANSISTOR:NPN,SI,TO-18	04713	ST899
A50A3Q2021	151-0434-00			TRANSISTOR:PNP,SI,TO-72	04713	SS7144
A50A3R1010	321-0068-00			RES,FXD,FILM:49.9 OHM,0.1%,0.125W,TC=T0	91637	CMF55116G49R90F
A50A3R1011	321-0068-00			RES,FXD,FILM:49.9 OHM,0.1%,0.125W,TC=T0	91637	CMF55116G49R90F
A50A3R1020	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A50A3R1022	315-0510-00			RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A50A3R1023	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A50A3R1030	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A50A3R1031	315-0432-00			RES,FXD,FILM:4.3K OHM,5%,0.25W	57668	NTR25J-E04K3
A50A3R1040	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A50A3R1041	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A50A3R1042	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A50A3R1050	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A50A3R2010	321-0068-00			RES,FXD,FILM:49.9 OHM,0.1%,0.125W,TC=T0	91637	CMF55116G49R90F
A50A3R2021	321-0068-00			RES,FXD,FILM:49.9 OHM,0.1%,0.125W,TC=T0	91637	CMF55116G49R90F
A50A3R2025	315-0471-00			RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A50A3R2026	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A50A3R2030	315-0510-00			RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A50A3R2031	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A50A3R2032	315-0510-00		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A50A3R2040	315-0202-00		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A50A3T1010	120-1011-00		TRANSFORMER,RF:TOROID	80009	120-1011-00
A50A3T2010	120-1011-00		TRANSFORMER,RF:TOROID	80009	120-1011-00
A50A3T2030	120-0459-00		XFMR,TOROID:	80009	120-0459-00
A50A3U1030	156-0991-00		MICROCKT,LINEAR:VOLTAGE REGULATOR	04713	MC78L05ACP
A50A3U1050	156-0388-03		MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	80009	156-0388-03
A50A3U2040	156-0991-00		MICROCKT,LINEAR:VOLTAGE REGULATOR	04713	MC78L05ACP
A50A3U2050	156-0386-02		MICROCKT,DGTL:TRIPLE 3-INP NAND GATE,SCRN	80009	156-0386-02
A50A4	670-7921-03		CIRCUIT BD ASSY:ERROR AMPL	80009	670-7921-03
A50A4C1011	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C1012	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C1031	283-0177-00		CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A4C1032	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C1037	283-0177-00		CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A4C1038	283-0339-00		CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA
A50A4C1068	283-0177-00		CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A4C1078	290-0782-00		CAP,FXD,ELCTLT:4.7UF,+75-20%,35VDC	55680	ULB1V4R7TAAANA
A50A4C1079	283-0032-00		CAP,FXD,CER DI:470PF,5%,500V	59660	831-000-Z5E0471J
A50A4C2013	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C2015	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C2019	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C2021	283-0032-00		CAP,FXD,CER DI:470PF,5%,500V	59660	831-000-Z5E0471J
A50A4C2034	283-0177-00		CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A4C2035	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C2048	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C2049	283-0070-00		CAP,FXD,CER DI:30PF,10%,50V	51642	200-050-NP0-300K
A50A4C2059	283-0687-00		CAP,FXD,MICA DI:560PF,2%,300V	00853	D153F561G0
A50A4C2060	283-0177-00		CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A4C2061	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A50A4C2062	283-0339-00		CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA
A50A4C2063	283-0330-00		CAP,FXD,CER DI:100PF,5%,50V	05397	C320C101J5R5CA
A50A4C2065	283-0028-00		CAP,FXD,CER DI:0.0022UF,20%,50V	59660	0805585Y5S0222M
A50A4C2067	283-0177-00		CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A4C2069	283-0203-00		CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR305SC474MAA
A50A4C2071	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C2072	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C2077	283-0339-00		CAP,FXD,CER DI:0.22UF,10%,50V	04222	SR305C224KAA
A50A4C2078	283-0176-00		CAP,FXD,CER DI:0.0022UF,20%,50V	04222	SR205C222MAA
A50A4C2082	290-0942-00		CAP,FXD,ELCTLT:100UF,+100-10%,25V	55680	UPA1E101MAH
A50A4C3010	283-0203-00		CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR305SC474MAA
A50A4C3011	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A50A4C3044	283-0239-00		CAP,FXD,CER DI:0.022UF,10%,50V	04222	3439-050C-223K
A50A4C3050	290-0804-00		CAP,FXD,ELCTLT:10UF,+50-20%,25V	55680	ULB1E100TAAANA
A50A4C3051	283-0032-00		CAP,FXD,CER DI:470PF,5%,500V	59660	831-000-Z5E0471J
A50A4C3060	283-0177-00		CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A50A4C3065	283-0115-00		CAP,FXD,CER DI:47PF,5%,200V	59821	2DDT60K470J
A50A4CR3069	152-0141-02		SEMICONDCV,DI:SW,SI,30V,150MA,30V,00-35	03508	DA2527 (1N4152)
A50A4L3010	108-1112-00		COIL,RF:FIXED 170UH	80009	108-1112-00
A50A4L3060	108-1112-00		COIL,RF:FIXED 170UH	80009	108-1112-00
A50A4L3070	120-0382-00		COIL,RF:210UH,+28%-43%,14 TURNS	80009	120-0382-00
A50A4Q2030	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A50A4R1011	321-0001-00		RES,FXD,FILM:10 OHM,1%,0.125W,TC=T0	19701	5033RD10R00FMS
A50A4R1021	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A50A4R1022	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A50A4R1023	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A50A4R1024	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A50A5R2043	315-0201-00		RES,FXD,FILM:200 OHM,5%,0.25W	57668	NTR25J-E200E
A50A5U2021	156-1160-00		MICROCKT,LINEAR:VOLTAGE REGULATOR	04713	MC78L12ACG
A50A5Y2012	158-0172-00		XTAL UNIT,QTZ:25.064 MHZ,0.001%,SERIES	33096	CCAT101267
A51	672-0164-00		CIRCUIT BD ASSY:COUNTER	80009	672-0164-00
A51A1	670-7899-01		CIRCUIT BD ASSY:COUNTER	80009	670-7899-01
A51A1C1014	283-0156-00		CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A51A1C1016	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A51A1C1038	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A51A1C2010	283-0195-00		CAP,FXD,CER DI:680PF,5%,50V	04222	SR205A681JAA
A51A1C2034	283-0156-00		CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A51A1C2044	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A51A1C2046	283-0175-00		CAP,FXD,CER DI:10PF,5%,200V	05397	C312C100D2G5CA 8
A51A1C2050	283-0156-00		CAP,FXD,CER DI:1000PF,+80-20%,200V	04222	SR152E102ZAA
A51A1C2052	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A51A1C2054	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A51A1C2056	283-0114-00		CAP,FXD,CER DI:1500PF,5%,200V	59660	805-534-Y5D0152J
A51A1C2058	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A51A1C2059	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A51A1C3010	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A51A1C3020	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A51A1C3050	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A51A1C3052	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A51A1C3054	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A51A1C3058	283-0024-00		CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A51A1C4042	290-0748-00		CAP,FXD,ELCTLT:10UF,+50-20%,25WVDC	54473	ECE-BIEV100S
A51A1CR1012	152-0322-00		SEMICON DVC,DI:SCOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A51A1CR1030	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A51A1CR1040	152-0322-00		SEMICON DVC,DI:SCOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A51A1CR1042	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A51A1CR1044	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A51A1CR2040	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A51A1CR2048	152-0322-00		SEMICON DVC,DI:SCOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A51A1CR3056	152-0322-00		SEMICON DVC,DI:SCOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A51A1CR3058	152-0322-00		SEMICON DVC,DI:SCOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A51A1CR4040	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A51A1L2056	108-0734-00		COIL,RF:FIXED,163NH	TK1345	108-0734-00
A51A1L4016	108-0828-00		COIL,RF:FXD,56.4UH	80009	108-0828-00
A51A1P1036	131-0265-00		CONN,RCPT,ELEC:MINTR,CKT BD MTD,MALE,RTANG	98291	051-053-0000
A51A1P1056	131-0265-00		CONN,RCPT,ELEC:MINTR,CKT BD MTD,MALE,RTANG	98291	051-053-0000
A51A1Q1018	151-0367-00		TRANSISTOR:NPN,SI,TO-92	04713	SPS 8811
A51A1Q1034	151-0369-00		TRANSISTOR:PNP,SI,X-55	04713	SPS8273
A51A1Q1044	151-0369-00		TRANSISTOR:PNP,SI,X-55	04713	SPS8273
A51A1Q4034	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A51A1Q4052	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A51A1R1012	315-0472-00		RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A51A1R1014	315-0201-00		RES,FXD,FILM:200 OHM,5%,0.25W	57668	NTR25J-E200E
A51A1R1016	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A51A1R1020	317-0103-00		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A51A1R1021	317-0103-00		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A51A1R1030	315-0271-00		RES,FXD,FILM:270 OHM,5%,0.25W	57668	NTR25J-E270E
A51A1R1032	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A51A1R1034	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A51A1R1042	315-0271-00		RES,FXD,FILM:270 OHM,5%,0.25W	57668	NTR25J-E270E
A51A1R1044	315-0751-00		RES,FXD,FILM:750 OHM,5%,0.25W	57668	NTR25J-E750E
A51A1R1046	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A51A1R1056	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A51A1R2022	315-0561-00		RES,FXD,FILM:560 OHM,5%,0.25W	19701	5043CX560R0J
A51A1R2030	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A51A1R2032	315-0681-00			RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A51A1R2034	315-0122-00			RES,FXD,FILM:1.2K OHM,5%,0.25W	57668	NTR25J-E01K2
A51A1R2036	315-0301-00			RES,FXD,FILM:300 OHM,5%,0.25W	57668	NTR25J-E300E
A51A1R2038	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A51A1R2042	315-0681-00			RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A51A1R2044	315-0122-00			RES,FXD,FILM:1.2K OHM,5%,0.25W	57668	NTR25J-E01K2
A51A1R3010	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A51A1R3012	315-0361-00			RES,FXD,FILM:360 OHM,5%,0.25W	19701	5043CX360R0J
A51A1R3030	315-0512-00			RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A51A1R3034	315-0512-00			RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A51A1R3044	315-0512-00			RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A51A1R3048	315-0153-00			RES,FXD,FILM:15K OHM,5%,0.25W	19701	5043CX15K00J
A51A1R3052	315-0821-00			RES,FXD,FILM:820 OHM,5%,0.25W	19701	5043CX820R0J
A51A1R3054	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A51A1R3056	315-0242-00			RES,FXD,FILM:2.4K OHM,5%,0.25W	57668	NTR25J-E02K4
A51A1R3058	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A51A1R4010	315-0561-00			RES,FXD,FILM:560 OHM,5%,0.25W	19701	5043CX560R0J
A51A1R4018	315-0472-00			RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A51A1R4020	315-0472-00			RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A51A1R4028	307-0696-00			RES NTWK,FXD,FI:7,10K OHM,2%,0.15W EACH	01121	108A103
A51A1R4036	315-0472-00			RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A51A1R4038	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A51A1R4050	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A51A1R4052	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A51A1U1018	156-0994-02			MICROCKT,DGTL:8 INPUT DATA SEL/MUX,SCRN	80009	156-0994-02
A51A1U1022	156-0796-01			MICROCKT,DGTL:8 STG SHF & STORE BUS RGTR	02735	CD4094BFX
A51A1U1028	156-1172-01			MICROCKT,DGTL:DUAL 4 BIT BIN CNTR,SCRN	80009	156-1172-01
A51A1U1038	156-0230-02			MICROCKT,DGTL:ECL,DUAL D-TYPE M/S FF	04713	MC10131LD
A51A1U1046	156-0994-02			MICROCKT,DGTL:8 INPUT DATA SEL/MUX,SCRN	80009	156-0994-02
A51A1U1050	156-1172-01			MICROCKT,DGTL:DUAL 4 BIT BIN CNTR,SCRN	80009	156-1172-01
A51A1U2010	156-1172-01			MICROCKT,DGTL:DUAL 4 BIT BIN CNTR,SCRN	80009	156-1172-01
A51A1U2018	156-1183-00			MICROCKT,DGTL:STTL,PRESET BINARY LATCH/CNTR	01295	SN74S197NP3
A51A1U2026	156-0914-02			MICROCKT,DGTL:OCT ST BFR W/3 STATE OUT,SCRN	80009	156-0914-02
A51A1U2030	156-0720-02			MICROCKT,DGTL:HEX DRVR,4-TO-2 LINE ENABLE	80009	156-0720-02
A51A1U2034	156-1172-01			MICROCKT,DGTL:DUAL 4 BIT BIN CNTR,SCRN	80009	156-1172-01
A51A1U2040	156-0469-02			MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A51A1U2046	156-0331-03			MICROCKT,DGTL:DUAL D TYPE POSITIVE EDGE	01295	SN74S74NP3
A51A1U2050	156-1172-01			MICROCKT,DGTL:DUAL 4 BIT BIN CNTR,SCRN	80009	156-1172-01
A51A1U2056	156-0902-00			MICROCKT,DGTL:FM IF AMPL	04713	MC1355P
A51A1U3010	156-0383-00			MICROCKT,DGTL:QUAD 2-INP NOR GATE	01295	SN74LS02 N OR J
A51A1U3018	156-0799-00			MICROCKT,DGTL:DECADE CNTR/DIVIDER	04713	MC14017BCL
A51A1U3024	156-0914-02			MICROCKT,DGTL:OCT ST BFR W/3 STATE OUT,SCRN	80009	156-0914-02
A51A1U3030	156-0914-02			MICROCKT,DGTL:OCT ST BFR W/3 STATE OUT,SCRN	80009	156-0914-02
A51A1U3034	156-0914-02			MICROCKT,DGTL:OCT ST BFR W/3 STATE OUT,SCRN	80009	156-0914-02
A51A1U3040	156-0798-02			MICROCKT,DGTL:DUAL 14/1-LINE SEL/MUX SCRN	80009	156-0798-02
A51A1U3046	156-0385-02			MICROCKT,DGTL:HEX INVERTER,SCRN	30009	156-0385-02
A51A1U3048	156-0366-00			MICROCKT,DGTL:DUAL D FLIP-FLOP	02735	CD4013BF
A51A1U4056	156-1172-01			MICROCKT,DGTL:DUAL 4 BIT BIN CNTR,SCRN	80009	156-1172-01
A51A1U4074	156-0720-02			MICROCKT,DGTL:HEX DRVR,4-TO-2 LINE ENABLE	80009	156-0720-02
A54	670-9680-03			CIRCUIT BD ASSY:MEMORY	80009	670-9680-03
A54	670-9950-03			CIRCUIT BD ASSY:MEMORY (OPTION 39 ONLY)	80009	670-9950-03
A54	671-0029-00	8010100	8010134	CIRCUIT BD ASSY:MEMORY	80009	671-0029-00
A54	671-0029-01	8010135		CIRCUIT BD ASSY:MEMORY (OPTION 45 ONLY)	80009	671-0029-01
A548T2040	146-0044-00			BATTERY,DRY:3V,0.17AH @ 0.85MA,BUTTON CELL, LITHIUM-MANGANESE DIOXIDE	00681	ORDER BY DESCR
A548T2040	146-0057-00			BATTERY,DRY:1.5V NOMINAL (OPTION 39 ONLY)	80009	146-0057-00

Component No.	Tektronix	Serial/Assembly No.		Name & Description	Mfr.	Mfr. Part No.
	Part No.	Effective	Dscont		Code	
A54BT2041	146-0057-00			BATTERY, DRY: 1.5V NOMINAL (OPTION 39 ONLY)	80009	146-0057-00
A54BT2042	146-0057-00			BATTERY, DRY: 1.5V NOMINAL (OPTION 39 ONLY)	80009	146-0057-00
A54C1010	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C1020	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C1030	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C1034	290-5001-00			CAP, FXD, ELCTLT: 10UF, 20%, 16V	TK0900	ALCHIP-S16V10UF
A54C2020	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C2030	290-5001-00			CAP, FXD, ELCTLT: 10UF, 20%, 16V	TK0900	ALCHIP-S16V10UF
A54C2040	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C2050	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C2054	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C2056	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C2060	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C3020	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C3030	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C3034	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C3040	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C3042	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C3046	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A54C4050	290-5001-00			CAP, FXD, ELCTLT: 10UF, 20%, 16V	TK0900	ALCHIP-S16V10UF
A54CR1030	152-5001-00			SEMICON DVC, DI: SCHOTTKY, SI, 50V, 1PF, SOT-23	80009	152-5001-00
A54CR2020	152-5000-00			SEMICON DVC, DI: SW, SI, 70V, COM CATHODE	04713	BAV70
A54CR2024	152-5000-00			SEMICON DVC, DI: SW, SI, 70V, COM CATHODE	04713	BAV70
A54CR2030	152-5000-00			SEMICON DVC, DI: SW, SI, 70V, COM CATHODE	04713	BAV70
A54CR3030	152-5001-00			SEMICON DVC, DI: SCHOTTKY, SI, 50V, 1PF, SOT-23	80009	152-5001-00
A54L4040	108-0836-00			COIL, RF: FIXED, 14UH	80009	108-0836-00
A54Q2025	151-5001-00			TRANSISTOR: NPN, SI, SOT-23	80009	151-5001-00
A54Q2030	151-5001-00			TRANSISTOR: NPN, SI, SOT-23	80009	151-5001-00
A54Q2035	151-5001-00			TRANSISTOR: NPN, SI, SOT-23	80009	151-5001-00
A54Q2037	151-5000-00			TRANSISTOR: PNP, SI, SOT-23	80009	151-5000-00
A54R1030	321-5014-00			RES, FXD, FILM: 475 OHM, 1%, 0.125W	01121	BCK4750FT
A54R1046	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A54R1048	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A54R1050	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A54R1051	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A54R1052	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A54R1054	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A54R1056	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A54R1057	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A54R1058	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A54R2020	321-5026-00			RES, FXD, FILM: 4.75K, 1%, 0.125W	01121	BCK4751FT
A54R2026	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A54R2032	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A54R2033	321-5018-00			RES, FXD, FILM: 1.00K, 1%, 0.125W	01121	BCK1001FT
A54R2034	321-5047-00			RES, FXD, FILM: 100K, 1%, 0.125W	01121	BCK1003FT
A54R2035	321-5039-00			RES, FXD, FILM: 56.2K, 1%, 0.125W	01121	BCK5622FT
A54R2036	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A54R2037	321-5015-00			RES, FXD, FILM: 562 OHM, 1%, 0.125W	01121	BCK5620FT
A54R2038	321-5018-00			RES, FXD, FILM: 1.00K, 1%, 0.125W	01121	BCK1001FT
A54R3030	321-5006-00			RES, FXD, FILM: 100 OHM, 1%, 0.125W	01121	BCK1000FT
A54R3032	321-5006-00			RES, FXD, FILM: 100 OHM, 1%, 0.125W	01121	BCK1000FT
A54R3034	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A54S1050	260-1721-00			SWITCH, ROCKER: 8, SPST, 125MA, 30VDC	81073	76SB08S
A54U1010	156-1842-00			IC, MEMORY: CMOS, SRAM; 8K X 8, 150NS, OE; , DIP28.	80009	156-1842-00

6

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Dscont			
A54U1020	156-2473-00			IC, MEMORY: CMOS, SRAM; 8K X 8, 200NS, 10UA, OE; , DIP28.6	TK0961	uPD4464C-20
A54U1030	156-2473-00			IC, MEMORY: CMOS, SRAM; 8K X 8, 200NS, 10UA, OE; , DIP28.6	TK0961	uPD4464C-20
A54U2040	156-5001-00			MICROCKT, DGTL: LSTTL, QUAD 2 INPUT NAND GATE	01295	SN74LS00D
A54U2045	156-5005-00			MICROCKT, DGTL: DUAL 2-TO 4-LINE DCDR/DEMUX	01295	SN74LS139D
A54U2050	156-5034-00			MICROCKT, DGTL: LSTTL, OCTAL BFR W/3 STATE OUT	18324	N74LS244D
A54U3020	156-1842-00			IC, MEMORY: CMOS, SRAM; 8K X 8, 150NS, OE; , DIP28.6	80009	156-1842-00
A54U3025	156-5005-00			MICROCKT, DGTL: DUAL 2-TO 4-LINE DCDR/DEMUX	01295	SN74LS139D
A54U3030	156-5032-00			MICROCKT, DGTL: LSTTL, QUAD 2 INP NOR GATE	18324	N74LS02D
A54U3040	156-5033-00			MICROCKT, DGTL: LSTTL, 3 TO 8 LINE DCDR/DEMUX	18324	74LS138D
A54U3045	156-5033-00			MICROCKT, DGTL: LSTTL, 3 TO 8 LINE DCDR/DEMUX	18324	74LS138D
A54U3050	160-3691-06			MICROCKT, DGTL: NMOS, 32 X 8 EPROM, PRGM	80009	160-3691-06
A54U3050	160-4487-00	8010100	8010134	MICROCKT, DGTL: NMOS, 32 X 8 EPROM, PRGM	80009	160-4487-00
A54U3050	160-4487-01	8010135		MICROCKT, DGTL: NMOS, 32 X 8 EPROM, PRGM (OPTION 45 ONLY)	80009	160-4487-01
A54U3060	160-3692-06			MICROCKT, DGTL: NMOS, 32 X 8 EPROM, PRGM	80009	160-3692-06
A54U3060	160-4488-00	8010100	8010134	MICROCKT, DGTL: NMOS, 32 X 8 EPROM, PRGM	80009	160-4488-00
A54U3060	160-4488-01	8010135		MICROCKT, DGTL: NMOS, 32 X 8 EPROM, PRGM (OPTION 45 ONLY)	80009	160-4488-01
A54U4020	156-5009-00			MICROCKT, DGTL: OCTAL D FF W/CLEAR	80009	156-5009-00
A54U4030	156-5003-00			MICROCKT, DGTL: LSTTL, DUAL D-TYPE FF	01295	SN74LS74D
A54U4040	156-5033-00			MICROCKT, DGTL: LSTTL, 3 TO 8 LINE DCDR/DEMUX	18324	74LS138D
A54W1030	321-5051-00			RES, FXD, FILM: 0 OHM, 1%, 0.125W	80009	321-5051-00
A56	670-9770-03			CIRCUIT BD ASSY: GPIB	80009	670-9770-03
A56	671-0030-00	8010100	8010134	CIRCUIT BD ASSY: GPIB	80009	671-0030-00
A56	671-0030-01	8010135		CIRCUIT BD ASSY: GPIB (OPTION 45 ONLY)	80009	671-0030-01
A56C1045	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C1056	290-5001-00			CAP, FXD, ELCTLT: 10UF, 20%, 16V	TK0900	ALCHIP-S16V10UF
A56C1064	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C1074	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C1085	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C1088	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C1094	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C1099	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C1106	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C2057	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C2074	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C2075	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C2076	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C2077	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C2078	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C2084	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C2095	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C2105	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C2107	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C3072	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C3074	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C3075	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C3076	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A56C4051	290-5001-00			CAP, FXD, ELCTLT: 10UF, 20%, 16V	TK0900	ALCHIP-S16V10UF
A56DS1047	150-1068-00			LT EMITTING DIO: RED, 635NM, 10MA MAX	50434	HLMP-6320
A56DS1048	150-1068-00			LT EMITTING DIO: RED, 635NM, 10MA MAX	50434	HLMP-6320
A56DS1049	150-1068-00			LT EMITTING DIO: RED, 635NM, 10MA MAX	50434	HLMP-6320
A56DS1050	150-1068-00			LT EMITTING DIO: RED, 635NM, 10MA MAX	50434	HLMP-6320
A56DS1052	150-1068-00			LT EMITTING DIO: RED, 635NM, 10MA MAX	50434	HLMP-6320
A56DS1053	150-1068-00			LT EMITTING DIO: RED, 635NM, 10MA MAX	50434	HLMP-6320

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A56DS1054	150-1068-00			LT EMITTING DIO:RED,635NM,10MA MAX	50434	HLMP-6320
A56J566	131-3823-00			CONN,RCPT,ELEC:HEADER,RTAND,2 X 13,0.1 SPACING	80009	131-3823-00
A56L4048	108-0836-00			COIL,RF:FIXED,14UH	80009	108-0836-00
A56R1042	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R1043	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R2044	321-5013-00			RES,FXD,FILM:392 OHM,1%,0.125W	01121	BCK3920FT
A56R2045	321-5013-00			RES,FXD,FILM:392 OHM,1%,0.125W	01121	BCK3920FT
A56R2046	321-5013-00			RES,FXD,FILM:392 OHM,1%,0.125W	01121	BCK3920FT
A56R2047	321-5013-00			RES,FXD,FILM:392 OHM,1%,0.125W	01121	BCK3920FT
A56R2072	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R2075	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R2076	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R2077	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R2078	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R3041	321-5013-00			RES,FXD,FILM:392 OHM,1%,0.125W	01121	BCK3920FT
A56R3042	321-5013-00			RES,FXD,FILM:392 OHM,1%,0.125W	01121	BCK3920FT
A56R3043	321-5013-00			RES,FXD,FILM:392 OHM,1%,0.125W	01121	BCK3920FT
A56R3074	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R3075	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R3076	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R3077	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R3086	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R3087	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R4082	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R4083	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R4084	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R4085	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R4086	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A56R6014	321-5010-00			RES,FXD,FILM:221 OHM,1%,0.125W	01121	BCK221FT
A56U1010	160-3693-06			MICROCKT,DGTL:NMOS,32 X 8 EPROM,PRGM	80009	160-3693-06
A56U1010	160-4489-00	B010100	B010134	MICROCKT,DGTL:NMOS,32 X 8 EPROM,PRGM	80009	160-4489-00
A56U1010	160-4489-01	B010135		MICROCKT,DGTL:NMOS,32 X 8 EPROM,PRGM (OPTION 45 ONLY)	80009	160-4489-01
A56U1020	160-3694-06			MICROCKT,DGTL:NMOS,32 X 8 EPROM,PRGM	80009	160-3694-06
A56U1020	160-4490-00	B010100	B010134	MICROCKT,DGTL:NMOS,32 X 8 EPROM,PRGM	80009	160-4490-00
A56U1020	160-4490-01	B010135		MICROCKT,DGTL:NMOS,32 X 8 EPROM,PRGM (OPTION 45 ONLY)	80009	160-4490-01
A56U1025	160-3695-06			MICROCKT,DGTL:NMOS,32 X 8 EPROM,PRGM	80009	160-3695-06
A56U1025	160-4491-00	B010100	B010134	MICROCKT,DGTL:NMOS,32 X 8 EPROM,PRGM	80009	160-4491-00
A56U1025	160-4491-01	B010135		MICROCKT,DGTL:NMOS,32 X 8 EPROM,PRGM (OPTION 45 ONLY)	80009	160-4491-01
A56U1035	160-3696-06			MICROCKT,DGTL:NMOS,32 X 8 EPROM,PRGM	80009	160-3696-06
A56U1035	160-4492-00	B010100	B010134	MICROCKT,DGTL:NMOS,32 X 8 EPROM,PRGM	80009	160-4492-00
A56U1035	160-4492-01	B010135		MICROCKT,DGTL:NMOS,32 X 8 EPROM,PRGM (OPTION 45 ONLY)	80009	160-4492-01
A56U1040	156-5033-00			MICROCKT,DGTL:LSTTL,3 TO 8 LINE DCDR/DEMUX	18324	74LS138D
A56U1055	156-5033-00			MICROCKT,DGTL:LSTTL,3 TO 8 LINE DCDR/DEMUX	18324	74LS138D
A56U2040	156-5001-00			MICROCKT,DGTL:LSTTL,QUAD 2 INPUT NAND GATE	01295	SN74LS00D
A56U2044	156-5009-00			MICROCKT,DGTL:OCTAL D FF W/CLEAR	80009	156-5009-00
A56U2045	156-5006-00			MICROCKT,DGTL:LSTTL,OCTAL INVERTER BUFFER	01295	SN74LS240D
A56U2050	156-1444-01			MICROCKT,DGTL:NMOS,GPIB INTFC CONTROLLER	01295	TMS9914A (NL
A56U3015	160-3697-06			MICROCKT,DGTL:NMOS,32 X 8 EPROM,PRGM	80009	160-3697-06
A56U3015	160-4493-00	B010100	B010134	MICROCKT,DGTL:NMOS,32 X 8 EPROM,PRGM	80009	160-4493-00
A56U3015	160-4493-01	B010135		MICROCKT,DGTL:NMOS,32 X 8 EPROM,PRGM (OPTION 45 ONLY)	80009	160-4493-01
A56U3020	160-3698-06			MICROCKT,DGTL:NMOS,32 X 8 EPROM,PRGM	80009	160-3698-06
A56U3020	160-4494-00	B010100	B010134	MICROCKT,DGTL:NMOS,32 X 8 EPROM,PRGM	80009	160-4494-00
A56U3020	160-4494-01	B010135		MICROCKT,DGTL:NMOS,32 X 8 EPROM,PRGM	80009	160-4494-01

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
				(OPTION 45 ONLY)		
A56U3030	160-3699-06			MICROCKT,DGTL:NMQS,32 X 8 EPROM,PRGM	80009	160-3699-06
A56U3030	160-4495-00	8010100	8010134	MICROCKT,DGTL:NMQS,32 X 8 EPROM,PRGM	80009	160-4495-00
A56U3030	160-4495-01	8010135		MICROCKT,DGTL:NMQS,32 X 8 EPROM,PRGM	80009	160-4495-01
				(OPTION 45 ONLY)		
A56U3040	156-5001-00			MICROCKT,DGTL:LS TTL,QUAD 2 INPUT NAND GATE	01295	SN74LS00D
A56U3045	156-5036-00			MICROCKT,DGTL:LS TTL,QUAD TWO INPUT EXCLUSIV E	80009	156-5036-00
A56U4040	156-5001-00			MICROCKT,DGTL:LS TTL,QUAD 2 INPUT NAND GATE	01295	SN74LS00D
A56W1044	321-5051-00			RES,FXD,FILM:0 OHM,1%,0.125W	80009	321-5051-00
A58	670-8882-00			CIRCUIT 8D ASSY:PROCESSOR	80009	670-8882-00
A58C1015	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1016	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1017	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1025	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1026	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1027	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1028	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1031	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1032	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1033	283-5001-00			CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A58C1034	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C1035	283-5001-00			CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A58C1036	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C2015	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C2030	290-5003-00			CAP,FXD,ELCTLT:47UF,20%,10V	56289	193D476X0010E2
A58C2031	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C2032	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C2033	283-5001-00			CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A58C2034	283-5002-00			CAP,FXD,CER DI:1000PF,10%,50V	14674	12061A102KAT050R
A58C2035	283-5001-00			CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A58C2036	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C3015	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C3020	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C3025	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C3030	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C3034	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A58C3035	290-5001-00			CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A58C3036	290-5003-00			CAP,FXD,ELCTLT:47UF,20%,10V	56289	193D476X0010E2
A58CR1030	152-5000-00			SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A58CR2020	152-5000-00			SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A58CR2025	152-5000-00			SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A58L1035	108-5002-00			RES,FXD,Ww:20 OHM,5%,2.5W,SMD	54583	NL453232T-150K
A58L3035	108-0836-00			COIL,RF:FIXED,14UH	80009	108-0836-00
A58Q1030	151-5001-00			TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A58Q2030	151-5001-00			TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A58Q2035	151-5001-00			TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A58R1010	321-5027-00			RES,FXD,FILM:5.62K,1%,0.125W	01121	8CK5621FT
A58R1021	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	8CK1002FT
A58R1022	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	8CK1002FT
A58R1023	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	8CK1002FT
A58R1024	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	8CK1002FT
A58R1025	321-5027-00			RES,FXD,FILM:5.62K,1%,0.125W	01121	8CK5621FT
A58R1026	321-5027-00			RES,FXD,FILM:5.62K,1%,0.125W	01121	8CK5621FT
A58R1030	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	8CK1002FT
A58R1031	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	8CK1002FT
A58R1032	321-5035-00			RES,FXD,FILM:27.4K,1%,0.125W	01121	8CK2742FT
A58R1033	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	8CK1002FT



Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A58R1034	321-5018-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A58R1035	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A58R1036	321-5035-00		RES,FXD,FILM:27.4K,1%,0.125W	01121	BCK2742FT
A58R1037	321-5035-00		RES,FXD,FILM:27.4K,1%,0.125W	01121	BCK2742FT
A58R1038	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R2020	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R2021	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R2022	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R2023	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R2024	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R2025	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R2030	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R2031	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R2032	321-5018-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A58R2033	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R2034	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A58R2035	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R2036	321-5018-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A58R2037	321-5035-00		RES,FXD,FILM:27.4K,1%,0.125W	01121	BCK2742FT
A58R2038	321-5018-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A58R2039	321-5018-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A58R2045	321-5027-00		RES,FXD,FILM:5.62K,1%,0.125W	01121	BCK5621FT
A58R3010	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R3011	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R3012	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R3013	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R3014	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R3015	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R3016	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R3017	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R3030	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A58R3031	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A58R3032	321-5018-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A58R3033	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A58R3034	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58R3035	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A58R3036	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A58R3037	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A58R3044	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A58U1010	156-0427-04		MICROCKT,DGTL:PERIPHERAL INTERFACE ADPTR	04713	MC6821LD
A58U1015	156-5016-00		MICROCKT,DGTL:LSTTL,OCTAL BUS XCVR	80009	156-5016-00
A58U1020	156-1458-00		MICROCKT,DGTL:NMOS,DMA CONTROLLER	04713	MC6844 (P OR L)
A58U1024	156-5034-00		MICROCKT,DGTL:LSTTL,OCTAL BFR W/3 STATE OUT	18324	N74LS244D
A58U1025	156-1342-00		MICROCKT,DGTL:NMOS,8 BIT W/CLOCK & RAM	04713	MC6802P
A58U1030	156-5048-00		MICROCKT,DGTL:LSTTL,QUAD,2 INP & W/OC OUT	18324	N74LS09D
A58U1035	156-5015-00		MICROCKT,DGTL:HEX INVERTER	01295	SN74LS04D
A58U2015	156-1426-00		MICROCKT,DGTL:NMOS,PROGRAMMABLE TIMER MDL	04713	MC68840 (L OR P)
A58U2025	156-5016-00		MICROCKT,DGTL:LSTTL,OCTAL BUS XCVR	80009	156-5016-00
A58U2030	156-5034-00		MICROCKT,DGTL:LSTTL,OCTAL BFR W/3 STATE OUT	18324	N74LS244D
A58U2035	156-5024-00		MICROCKT,DGTL:LSTTL,HEX INVERTER W/OPEN	01295	SN74LS05D
A58U2036	156-5012-00		MICROCKT,DGTL:LSTTL,DUAL,4 INPUT NAND	01295	SN74LS200
A58U3010	156-5016-00		MICROCKT,DGTL:LSTTL,OCTAL BUS XCVR	80009	156-5016-00
A58U3015	156-5034-00		MICROCKT,DGTL:LSTTL,OCTAL BFR W/3 STATE OUT	18324	N74LS244D
A58U3020	156-5034-00		MICROCKT,DGTL:LSTTL,OCTAL BFR W/3 STATE OUT	18324	N74LS244D
A58U3025	156-5034-00		MICROCKT,DGTL:LSTTL,OCTAL BFR W/3 STATE OUT	18324	N74LS244D
A58U3030	156-5034-00		MICROCKT,DGTL:LSTTL,OCTAL BFR W/3 STATE OUT	18324	N74LS244D
A58U3035	156-5033-00		MICROCKT,DGTL:LSTTL,3 TO 8 LINE DCDR/DEMUX	18324	74LS158D

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A58U3036	156-5014-00		MICROCKT,DGTL:LSTTL,QUAD TWO-INPUT OR GATE	01295	SN74LS32D
A58W2035	321-5051-00		RES,FXD,FILM:0 OHM,1%,0.125W	80009	321-5051-00
A58Y1030	158-0257-00		XTAL UNIT,QTZ:3.4133MHZ,0.01%,ANTIRESONANT	33096	CCAT101872
A60	670-9100-02		CIRCUIT BD ASSY:DIGITAL STORAGE INTERFACE	80009	670-9100-02
A60C1031	283-0346-00		CAP,FXD,CER DI:0.47UF,+80-20%,100V	20932	5034ES100RD474Z
A60C2061	283-0065-00		CAP,FXD,CER DI:0.001UF,5%,50V	59660	0835-591Y5E0102J
A60C5061	283-0065-00		CAP,FXD,CER DI:0.001UF,5%,50V	59660	0835-591Y5E0102J
A60C6011	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A60C6041	290-0527-00		CAP,FXD,ELCTLT:15UF,20%,20V	05397	T368B156M020AS
A60C6042	290-0527-00		CAP,FXD,ELCTLT:15UF,20%,20V	05397	T368B156M020AS
A60C6043	290-0527-00		CAP,FXD,ELCTLT:15UF,20%,20V	05397	T368B156M020AS
A60C6051	283-0346-00		CAP,FXD,CER DI:0.47UF,+80-20%,100V	20932	5034ES100RD474Z
A60L6041	108-0598-00		COIL,RF:FIXED,200UH	80009	108-0598-00
A60L6042	108-0598-00		COIL,RF:FIXED,200UH	80009	108-0598-00
A60L6043	108-0598-00		COIL,RF:FIXED,200UH	80009	108-0598-00
A60R1011	315-0153-00		RES,FXD,FILM:15K OHM,5%,0.25W	19701	5043CX15K00J
A60R1032	321-0199-00		RES,FXD,FILM:1.15K OHM,1%,0.125W,TC=TO	07716	CEAD11500F
A60R1033	321-0277-00		RES,FXD,FILM:7.50K OHM,1%,0.125W,TC=TO	24546	NA55D7501F
A60R1034	321-0188-00		RES,FXD,FILM:887 OHM,1%,0.125W,TC=TO	07716	CEAD887ROF
A60R1040	311-1915-00		RES,VAR,NONWW:TRMR,20K OHM,10%,0.5 W	32997	3386C-T07-203
A60R1050	311-1921-00		RES,VAR,NONWW:TRMR,250 OHM,10%,0.5 W	32997	3386C-T07-251
A60R1053	321-0188-00		RES,FXD,FILM:887 OHM,1%,0.125W,TC=TO	07716	CEAD887ROF
A60R1055	311-1915-00		RES,VAR,NONWW:TRMR,20K OHM,10%,0.5 W	32997	3386C-T07-203
A60R1060	311-1921-00		RES,VAR,NONWW:TRMR,250 OHM,10%,0.5 W	32997	3386C-T07-251
A60R3011	315-0152-00		RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A60R3061	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A60R3062	321-0412-00		RES,FXD,FILM:191K OHM,1%,0.125W,TC=TO	07716	CEAD19102F
A60R3063	321-0232-00		RES,FXD,FILM:2.55K OHM,1%,0.125W,TC=TO	19701	5043ED2K550F
A60R4040	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A60R4061	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A60R5041	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A60R5042	321-0402-00		RES,FXD,FILM:150K OHM,1%,0.125W,TC=TO	19701	5033ED150K0F
A60R5061	321-0412-00		RES,FXD,FILM:191K OHM,1%,0.125W,TC=TO	07716	CEAD19102F
A60R5062	321-0277-00		RES,FXD,FILM:7.50K OHM,1%,0.125W,TC=TO	24546	NA55D7501F
A60R5063	321-0232-00		RES,FXD,FILM:2.55K OHM,1%,0.125W,TC=TO	19701	5043ED2K550F
A60R6011	307-0446-00		RES NTWK,FXD,FI:10K OHM,20%,(9)RES	11236	750-101-R10K
A60R6041	307-0446-00		RES NTWK,FXD,FI:10K OHM,20%,(9)RES	11236	750-101-R10K
A60R6051	321-0277-00		RES,FXD,FILM:7.50K OHM,1%,0.125W,TC=TO	24546	NA55D7501F
A60R6052	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A60R6053	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A60U1010	156-0385-02		MICROCKT,DGTL:HEX INVERTER,SCRN	80009	156-0385-02
A60U1020	156-0391-02		MICROCKT,DGTL:HEX LATCH W/CLEAR,SCRN	80009	156-0391-02
A60U2010	156-0480-02		MICROCKT,DGTL:QUAD 2-INP & GATE,SCRN,	80009	156-0480-02
A60U2020	156-0927-00		MICROCKT,LINER:DGTL TO ANLG CONV	18324	MC3410(CF OR F)
A60U2030	156-0391-02		MICROCKT,DGTL:HEX LATCH W/CLEAR,SCRN	80009	156-0391-02
A60U2040	156-0452-02		MICROCKT,DGTL:4-WIDE,2-INP A01,SCREENED	04713	SN74LS54 ND/JD
A60U2050	156-0388-03		MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	80009	156-0388-03
A60U3010	156-0382-02		MICROCKT,DGTL:QUAD 2 INP NAND GATE BURN	80009	156-0382-02
A60U3020	156-2565-00		MICROCKT,DGTL:HMON,CUSTOM,INTEGRATED WAVEFO RM PROCESSOR	80009	156-2565-00
A60U3040	156-0391-02		MICROCKT,DGTL:HEX LATCH W/CLEAR,SCRN	80009	156-0391-02
A60U3050	156-1226-00		MICROCKT,LINER:DUAL COMPARATOR	18324	LM319F
A60U4010	156-1228-00		IC,MEMORY:NMOS,SRAM:4K X 1,70NS;,DIP18.3	34335	AM2147-70DC
A60U4040	156-0927-00		MICROCKT,LINER:DGTL TO ANLG CONV	18324	MC3410(CF OR F)
A60U4060	156-1126-01		MICROCKT,LINER:VOLTAGE COMPARATOR,SELECTED	01295	LM311JG4
A60U5010	156-1228-00		IC,MEMORY:NMOS,SRAM:4K X 1,70NS;,DIP18.3	34335	AM2147-70DC
A60U5020	156-2566-01		MICROCKT,DGTL:CMOS,ASIC,STD CELL,HORIZ DGTL STORAGE PINS i6 & 18 NOT CONNECTED	80009	156-2566-01

Component No.	Tektronix		Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
	Part No.	Effective	Dscont				
A60U5040	156-0852-02				MICROCKT,DGTL:LSTTL,HEX BUS DRIVER	01295	SN74LS367NP3
A60U6010	156-0391-02				MICROCKT,DGTL:HEX LATCH W/CLEAR,SCRN	80009	156-0391-02
A60U6020	156-0956-02				MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT,SCRN	80009	156-0956-02
A60U6030	156-0469-02				MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A60U6060	156-1272-00				MICROCKT,LINEAR:DUAL OPERATIONAL AMPLIFIER	80009	156-1272-00
A60W2011	131-0566-00				BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A61	672-0163-01	B010100	8010129		CIRCUIT BD ASSY:VERTICAL DIGITAL STORAGE	80009	672-0163-01
A61	672-0163-02	B010130			CIRCUIT BD ASSY:VERTICAL DIGITAL STORAGE	80009	672-0163-02
A61A1	670-9099-01	B010100	8010129		CIRCUIT BD ASSY:DIGITAL STORAGE	80009	670-9099-01
A61A1	670-9099-02	B010130			CIRCUIT BD ASSY:DIGITAL STORAGE INTERFACE	80009	670-9099-02
A61A1C1031	285-1062-00				CAP,FXD,PLASTIC:0.005UF,1%,200V	19396	502F02PP460
A61A1C1035	285-1062-00				CAP,FXD,PLASTIC:0.005UF,1%,200V	19396	502F02PP460
A61A1C1039	283-0221-00				CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR305C474MAA
A61A1C1045	283-0197-00				CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A61A1C2034	283-0204-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A61A1C2035	283-0204-00				CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A61A1C2045	283-0197-00				CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A61A1C3035	283-0346-00				CAP,FXD,CER DI:0.47UF,+80-20%,100V	20932	5034ES100RD474Z
A61A1C3037	290-0527-00				CAP,FXD,ELCTLT:15UF,20%,20V	05397	T3688156M020AS
A61A1C3040	290-0527-00				CAP,FXD,ELCTLT:15UF,20%,20V	05397	T3688156M020AS
A61A1C3045	290-0527-00				CAP,FXD,ELCTLT:15UF,20%,20V	05397	T3688156M020AS
A61A1C3046	290-0527-00				CAP,FXD,ELCTLT:15UF,20%,20V	05397	T3688156M020AS
A61A1C3047	283-0346-00				CAP,FXD,CER DI:0.47UF,+80-20%,100V	20932	5034ES100RD474Z
A61A1L4035	108-0537-00				COIL,RF:FIXED,200UH	80009	108-0537-00
A61A1L4036	108-0537-00				COIL,RF:FIXED,200UH	80009	108-0537-00
A61A1L4045	108-0537-00				COIL,RF:FIXED,200UH	80009	108-0537-00
A61A1L4046	108-0537-00				COIL,RF:FIXED,200UH	80009	108-0537-00
A61A1Q4045	151-0302-00				TRANSISTOR:NPN,SI,TO-18	04713	ST899
A61A1R1014	315-0102-00				RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A61A1R1015	307-0446-00				RES NTWK,FXD,FI:10K OHM,20%,(9)RES	11236	750-101-R10K
A61A1R1033	311-1236-00				RES,VAR,NONNW:TRMR,250 OHM,0.5W	32997	3386X-T07-251
A61A1R1034	311-1236-00				RES,VAR,NONNW:TRMR,250 OHM,0.5W	32997	3386X-T07-251
A61A1R1035	321-0188-00				RES,FXD,FILM:887 OHM,1%,0.125W,TC=TO	07716	CEAD887R0F
A61A1R1036	321-0218-00				RES,FXD,FILM:1.82K OHM,1%,0.125W,TC=TO	19701	5033ED1K82F
A61A1R1037	321-0360-00				RES,FXD,FILM:54.9K OHM,1%,0.125W,TC=TO	19701	5033ED54K90F
A61A1R1043	321-0395-00				RES,FXD,FILM:127K OHM,1%,0.125W,TC=TO	07716	CEAD12702F
A61A1R1044	315-0103-00				RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A61A1R1045	311-1198-00				RES,VAR,NONNW:TRMR,20K OHM,0.5W	32997	3386X-T07-203
A61A1R1046	311-1198-00				RES,VAR,NONNW:TRMR,20K OHM,0.5W	32997	3386X-T07-203
A61A1R2035	315-0102-00				RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A61A1R2036	315-0102-00				RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A61A1R2037	321-0267-00				RES,FXD,FILM:5.90K OHM,1%,0.125W,TC=TO	19701	5033ED5K900F
A61A1R2038	321-0201-00				RES,FXD,FILM:1.21K OHM,1%,0.125W,TC=TO	19701	5043ED1K210F
A61A1R2044	321-0188-00				RES,FXD,FILM:887 OHM,1%,0.125W,TC=TO	07716	CEAD887R0F
A61A1R2045	315-0105-00				RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A61A1R2046	321-0364-00				RES,FXD,FILM:60.4K OHM,1%,0.125W,TC=TO	19701	5043ED60K40F
A61A1R2047	321-0222-00				RES,FXD,FILM:2.00K OHM,1%,0.125W,TC=TO	19701	5033ED2K00F
A61A1R2048	321-0395-00				RES,FXD,FILM:127K OHM,1%,0.125W,TC=TO	07716	CEAD12702F
A61A1R3035	315-0103-00				RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A61A1R4014	307-0446-00				RES NTWK,FXD,FI:10K OHM,20%,(9)RES	11236	750-101-R10K
A61A1R4044	321-0402-00				RES,FXD,FILM:150K OHM,1%,0.125W,TC=TO	19701	5033ED150K0F
A61A1R4045	321-0327-00	B010100	8010129		RES,FXD,FILM:24.9K OHM,1%,0.125W,TC=TO	07716	CEAD24901F
A61A1R4045	321-0333-00	B010130			RES,FXD,FILM:28.7K OHM,1%,0.125W,TC=TO	19701	5043ED28K70F
A61A1R4046	321-0385-00	B010100	8010129		RES,FXD,FILM:100K OHM,1%,0.125W,TC=TO	19701	5033ED100K0F
A61A1R4046	321-0387-00	B010130			RES,FXD,FILM:105K OHM,1%,0.125W,TC=TO	07716	CEAD10502F
A61AIS1015	260-1721-00				SWITCH,ROCKER:8,SPST,125MA,30VDC	81073	76S808S
A61AIU1010	156-0388-03				MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	80009	156-0388-03
A61AIU1035	156-1255-00				MICROCKT,LINEAR:D/A CONVERTER,8 BIT	06665	DAC08-1570

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A61A1U1040	156-0742-02		MICROCKT,LINER:OPNL AMPL,SELECTED	27014	LM318N/A+
A61A1U1045	156-0742-02		MICROCKT,LINER:OPNL AMPL,SELECTED	27014	LM318N/A+
A61A1U2010	156-0382-02		MICROCKT,DGTL:QUAD 2 INP NAND GATE BURN	80009	156-0382-02
A61A1U2015	156-0383-00		MICROCKT,DGTL:QUAD 2-INP NOR GATE	01295	SN74LS02 N OR J
A61A1U2020	156-0994-02		MICROCKT,DGTL:8 INPUT DATA SEL/MUX,SCRN	80009	156-0994-02
A61A1U2025	156-0865-02		MICROCKT,DGTL:OCTAL D FF W/CLEAR,SCRN	80009	156-0865-02
A61A1U2026	156-0392-03		MICROCKT,DGTL:QUAD LATCH W/CLEAR,SCRN,	80009	156-0392-03
A61A1U2027	156-0388-03		MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	80009	156-0388-03
A61A1U2028	156-0865-02		MICROCKT,DGTL:OCTAL D FF W/CLEAR,SCRN	80009	156-0865-02
A61A1U2030	155-0157-00		MICROCKT,DGTL:DIGITAL STORAGE VERTICAL	80009	155-0157-00
A61A1U2034	156-0330-02		MICROCKT,DGTL:HEX BUFFER,SCREENED	02735	CD4050BFX
A61A1U2035	156-1226-00		MICROCKT,LINER:DUAL COMPARATOR	18324	LM319F
A61A1U2040	156-1211-00		MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	27014	LF13333N
A61A1U2045	156-0742-02		MICROCKT,LINER:OPNL AMPL,SELECTED	27014	LM318N/A+
A61A1U3010	156-0480-02		MICROCKT,DGTL:QUAD 2-INP & GATE,SCRN,	80009	156-0480-02
A61A1U3015	156-0718-03		MICROCKT,DGTL:TRIPLE 3-INP NOR GATE,SCRN	80009	156-0718-03
A61A1U3020	156-0388-03		MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	80009	156-0388-03
A61A1U3024	156-0382-02		MICROCKT,DGTL:QUAD 2 INP NAND GATE BURN	80009	156-0382-02
A61A1U3025	156-1255-00		MICROCKT,LINER:D/A CONVERTER,8 BIT	06665	DAC08-157Q
A61A1U3030	156-0172-00		MICROCKT,DGTL:DUAL RETRIG MONOSTABLE MV	07263	74123 PC OR DC
A61A1U3040	156-0742-02		MICROCKT,LINER:OPNL AMPL,SELECTED	27014	LM318N/A+
A61A1U3045	156-0067-12		MICROCKT,LINER:OPERATIONAL AMPLIFIER	01295	UA741CJG
A61A1U4010	156-0385-02		MICROCKT,DGTL:HEX INVERTER,SCRN	80009	156-0385-02
A61A1U4015	156-0994-02		MICROCKT,DGTL:8 INPUT DATA SEL/MUX,SCRN	80009	156-0994-02
A61A1U4020	156-0975-02		MICROCKT,DGTL:UNIV SHIFT/STORAGE REGISTER	34335	DM74LS299N-B
A61A1U4025	156-0469-02		MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A61A1U4030	156-0385-02		MICROCKT,DGTL:HEX INVERTER,SCRN	80009	156-0385-02
A61A1U4040	156-0382-02		MICROCKT,DGTL:QUAD 2 INP NAND GATE BURN	80009	156-0382-02
A62	672-0187-01		CIRCUIT BD ASSY:LOG AMP	80009	672-0187-01
A62A1	670-9091-02		CIRCUIT BD ASSY:LOG AMP	80009	670-9091-02
A62A1C1005	283-5002-00		CAP,FXD,CER DI:1000PF,10%,50V	14674	12061A102KAT050R
A62A1C1055	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C1076	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C1119	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C1126	283-5002-00		CAP,FXD,CER DI:1000PF,10%,50V	14674	12061A102KAT050R
A62A1C1128	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C1129	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C1133	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C1135	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C1138	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C1142	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C1146	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C1148	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C1153	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C1158	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C1162	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C1163	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C1165	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C1170	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C1171	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C1178	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C2004	290-5000-00		CAP,FXD,ELCTLT:1UF,20%,50V	TK0900	S50V1MICROF
A62A1C2020	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C2023	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C2024	283-5042-00		CAP,FXD,CER DI:27PF,5%,50V	29454	I01R18N270JW4-T
A62A1C2027	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C2057	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A62A1C2072	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Discont			
A62A1C2076	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C2079	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C2112	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C2114	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C2128	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C2134	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C2135	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C2142	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C2143	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C2148	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C2149	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C2155	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C2156	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C2158	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C2162	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C2163	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C2165	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C2166	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C2173	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C2176	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C3128	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C3133	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C3138	283-5042-00			CAP, FXD, CER DI:27PF, 5%, 50V	29454	101R18N270JW4-T
A62A1C3140	283-5042-00			CAP, FXD, CER DI:27PF, 5%, 50V	29454	101R18N270JW4-T
A62A1C3142	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C3143	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C3145	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C3150	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C3151	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C3154	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C3155	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C4043	283-5001-00			CAP, FXD, CER DI:100PF, 5%, 50V	95275	VJ1206A101JXA
A62A1C4044	283-5001-00			CAP, FXD, CER DI:100PF, 5%, 50V	95275	VJ1206A101JXA
A62A1C4052	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C4063	283-5002-00			CAP, FXD, CER DI:1000PF, 10%, 50V	14674	12061A102KAT050R
A62A1C4070	290-5001-00			CAP, FXD, ELCTLT:10UF, 20%, 16V	TK0900	ALCHIP-S16V10UF
A62A1C4074	290-5001-00			CAP, FXD, ELCTLT:10UF, 20%, 16V	TK0900	ALCHIP-S16V10UF
A62A1C4076	290-5001-00			CAP, FXD, ELCTLT:10UF, 20%, 16V	TK0900	ALCHIP-S16V10UF
A62A1C4132	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C4138	283-5014-00			CAP, FXD, CER DI:330PF, 5%, 50V	80009	283-5014-00
A62A1C4140	283-5001-00			CAP, FXD, CER DI:100PF, 5%, 50V	95275	VJ1206A101JXA
A62A1C4145	283-5002-00			CAP, FXD, CER DI:1000PF, 10%, 50V	14674	12061A102KAT050R
A62A1C4151	283-5019-00			CAP, FXD, CER DI:2PF, +/-0.25PF, 50V	54583	C3216COG1H020C-T
A62A1C4164	283-5017-00			CAP, FXD, CER DI:1PF, +/-0.25PF, 50V	54583	C3216COG1H010C-T
A62A1C4167	283-5006-00			CAP, FXD, CER DI:5PF, +/-0.25PF, 50V	54583	C3216COG1H050C
A62A1C5047	283-5019-00			CAP, FXD, CER DI:2PF, +/-0.25PF, 50V	54583	C3216COG1H020C-T
A62A1C5048	283-5017-00			CAP, FXD, CER DI:1PF, +/-0.25PF, 50V	54583	C3216COG1H010C-T
A62A1C5066	290-5000-00			CAP, FXD, ELCTLT:1UF, 20%, 50V	TK0900	S50V1MICROF
A62A1C5074	290-5003-00			CAP, FXD, ELCTLT:47UF, 20%, 10V	56289	193D476X0010E2
A62A1C5076	290-5003-00			CAP, FXD, ELCTLT:47UF, 20%, 10V	56289	193D476X0010E2
A62A1C5127	283-5002-00			CAP, FXD, CER DI:1000PF, 10%, 50V	14674	12061A102KAT050R
A62A1C5143	283-5017-00			CAP, FXD, CER DI:1PF, +/-0.25PF, 50V	54583	C3216COG1H010C-T
A62A1C5151	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C5161	283-5001-00			CAP, FXD, CER DI:100PF, 5%, 50V	95275	VJ1206A101JXA
A62A1C5162	283-5011-00			CAP, FXD, CER DI:33PF, 5%, 50V	95275	VJ1206A330JXA
A62A1C5163	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C5171	283-5004-00			CAP, FXD, CER DI:0.1UF, 10%, 25V	20932	W1206X104K1B02
A62A1C6065	290-5001-00			CAP, FXD, ELCTLT:10UF, 20%, 16V	TK0900	ALCHIP-S16V10UF

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A62A1C6070	290-5001-00		CAP,FXD,ELCLTL:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A62A1C6072	290-5001-00		CAP,FXD,ELCLTL:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A62A1CR1036	152-0845-00		SEMICON DVC,DI:SCHOTTKY,SI,COM CATHODE PAI R,20V	80009	152-0845-00
A62A1CR1044	152-0845-00		SEMICON DVC,DI:SCHOTTKY,SI,COM CATHODE PAI R,20V	80009	152-0845-00
A62A1CR1049	152-0845-00		SEMICON DVC,DI:SCHOTTKY,SI,COM CATHODE PAI R,20V	80009	152-0845-00
A62A1CR1055	152-0845-00		SEMICON DVC,DI:SCHOTTKY,SI,COM CATHODE PAI R,20V	80009	152-0845-00
A62A1CR1060	152-0845-00		SEMICON DVC,DI:SCHOTTKY,SI,COM CATHODE PAI R,20V	80009	152-0845-00
A62A1CR2003	152-0843-00		SEMICON DVC,DI:SCHOTTKY,SI,CATHODE TO ANOD E SERIES PAIR,20V	04713	SRV-V-026
A62A1CR2030	152-0845-00		SEMICON DVC,DI:SCHOTTKY,SI,COM CATHODE PAI R,20V	80009	152-0845-00
A62A1CR2056	152-0845-00		SEMICON DVC,DI:SCHOTTKY,SI,COM CATHODE PAI R,20V	80009	152-0845-00
A62A1CR2060	152-0845-00		SEMICON DVC,DI:SCHOTTKY,SI,COM CATHODE PAI R,20V	80009	152-0845-00
A62A1CR2070	152-0845-00		SEMICON DVC,DI:SCHOTTKY,SI,COM CATHODE PAI R,20V	80009	152-0845-00
A62A1CR2072	152-0845-00		SEMICON DVC,DI:SCHOTTKY,SI,COM CATHODE PAI R,20V	80009	152-0845-00
A62A1CR4042	152-5005-00		SEMICON DVC,DI:DUAL,COMMON ANODE,70V,BAW56	04713	MBAW56TI
A62A1CR5045	152-5005-00		SEMICON DVC,DI:DUAL,COMMON ANODE,70V,BAW56	04713	MBAW56TI
A62A1CR5047	152-5004-00		SEMICON DVC,DI:SI,SW,SER PR,70V	04713	BAV99T1
A62A1CR5056	152-5004-00		SEMICON DVC,DI:SI,SW,SER PR,70V	04713	BAV99T1
A62A1CR5062	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A62A1CR6050	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A62A1CR6057	152-5005-00		SEMICON DVC,DI:DUAL,COMMON ANODE,70V,BAW56	04713	MBAW56TI
A62A1L2032	108-1362-00		COIL,RF:FIXED,40UH,10%	TK1345	108-1362-00
A62A1L2038	108-1362-00		COIL,RF:FIXED,40UH,10%	TK1345	108-1362-00
A62A1L2045	108-1362-00		COIL,RF:FIXED,40UH,10%	TK1345	108-1362-00
A62A1L2053	108-1362-00		COIL,RF:FIXED,40UH,10%	TK1345	108-1362-00
A62A1L2058	108-0443-00		COIL,RF:FIXED,23.5UH	80009	108-0443-00
A62A1L2066	108-0443-00		COIL,RF:FIXED,23.5UH	80009	108-0443-00
A62A1L3035	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A62A1L3040	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A62A1L3045	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A62A1L3048	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A62A1L3052	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A62A1L4036	108-5023-00		COIL,RF:FXD,5.6UH,20%,Q50	54583	NL453232T-5R6M
A62A1L4037	108-5017-00		COIL,RF:FXD,18UH	54583	NL453232T-180K
A62A1L4038	108-5024-00		COIL,RF:39UH,10%	54583	NL453232T-390K
A62A1L4039	108-5017-00		COIL,RF:FXD,18UH	54583	NL453232T-180K
A62A1L5070	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A62A1Q1010	151-5012-00		TRANSISTOR:PMP,SI,SOT-23	80009	151-5012-00
A62A1Q1020	151-5012-00		TRANSISTOR:PMP,SI,SOT-23	80009	151-5012-00
A62A1Q1022	151-5011-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5011-00
A62A1Q1030	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A62A1Q1032	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A62A1Q1036	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A62A1Q1038	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A62A1Q1043	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A62A1Q1045	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A62A1Q1049	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A62A1Q1052	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A62A1Q1056	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A62A1Q1058	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A62A1Q1059	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A62A1Q1064	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A62A1Q1067	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A62A1Q1072	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A62A1Q2073	151-5009-00		TRANSISTOR:NPN,SI,SOT-89	80009	151-5009-00
A62A1Q2075	151-5009-00		TRANSISTOR:NPN,SI,SOT-89	80009	151-5009-00
A62A1Q4045	151-5002-00		TRANSISTOR:JFET,N-CH,RDS=60	04713	MMBF4392T1
A62A1Q4046	151-5002-00		TRANSISTOR:JFET,N-CH,RDS=60	04713	MMBF4392T1
A62A1Q4056	151-5000-00		TRANSISTOR:PNP,SI,SOT-23	80009	151-5000-00
A62A1Q4057	151-5000-00		TRANSISTOR:PNP,SI,SOT-23	80009	151-5000-00
A62A1Q4058	151-5000-00		TRANSISTOR:PNP,SI,SOT-23	80009	151-5000-00
A62A1Q4059	151-5000-00		TRANSISTOR:PNP,SI,SOT-23	80009	151-5000-00
A62A1Q5045	151-5002-00		TRANSISTOR:JFET,N-CH,RDS=60	04713	MMBF4392T1
A62A1Q5046	151-5002-00		TRANSISTOR:JFET,N-CH,RDS=60	04713	MMBF4392T1
A62A1Q5055	151-5002-00		TRANSISTOR:JFET,N-CH,RDS=60	04713	MMBF4392T1
A62A1Q5056	151-5002-00		TRANSISTOR:JFET,N-CH,RDS=60	04713	MMBF4392T1
A62A1Q5057	151-5002-00		TRANSISTOR:JFET,N-CH,RDS=60	04713	MMBF4392T1
A62A1Q5063	151-5000-00		TRANSISTOR:PNP,SI,SOT-23	80009	151-5000-00
A62A1Q5064	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A62A1Q6055	151-5001-00		TRANSISTOR:NPN,SI,SOT-23	80009	151-5001-00
A62A1R1012	311-1283-00		RES,VAR,NONWw:TRMR,10K OHM,0.5W	32997	3329S-L58-103
A62A1R1013	321-5005-00		RES,FXD,FILM:27.4 OHM,1%,0.125W	57668	MCR18EZHFW 27E4
A62A1R1025	311-1279-00		RES,VAR,NONWw:TRMR,500 OHM,0.5W	32997	3329S-L58-501
A62A1R1026	321-5024-00		RES,FXD,FILM:3.32K,1%,0.125W	01121	BCK3321FT
A62A1R1030	311-1283-00		RES,VAR,NONWw:TRMR,10K OHM,0.5W	32997	3329S-L58-103
A62A1R1037	311-1283-00		RES,VAR,NONWw:TRMR,10K OHM,0.5W	32997	3329S-L58-103
A62A1R1060	311-1279-00		RES,VAR,NONWw:TRMR,500 OHM,0.5W	32997	3329S-L58-501
A62A1R1075	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A62A1R1077	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A62A1R1112	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A62A1R1114	321-5015-00		RES,FXD,FILM:562 OHM,1%,0.125W	01121	BCK5620FT
A62A1R1115	321-5014-00		RES,FXD,FILM:475 OHM,1%,0.125W	01121	BCK4750FT
A62A1R1118	321-5005-00		RES,FXD,FILM:27.4 OHM,1%,0.125W	57668	MCR18EZHFW 27E4
A62A1R1119	321-5023-00		RES,FXD,FILM:2.74K,1%,0.125W	01121	BCK2741FT
A62A1R1120	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A62A1R1122	321-5043-00		RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A62A1R1125	321-5015-00		RES,FXD,FILM:562 OHM,1%,0.125W	01121	BCK5620FT
A62A1R1126	321-5035-00		RES,FXD,FILM:27.4K,1%,0.125W	01121	BCK2742FT
A62A1R1131	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A62A1R1142	321-5008-00		RES,FXD,FILM:150 OHM,1%,0.125W	01121	BCK1500FT
A62A1R1144	321-5015-00		RES,FXD,FILM:562 OHM,1%,0.125W	01121	BCK5620FT
A62A1R1145	321-5022-00		RES,FXD,FILM:2.21K,1%,0.125W	01121	BCK2211FT
A62A1R1148	321-5008-00		RES,FXD,FILM:150 OHM,1%,0.125W	01121	BCK1500FT
A62A1R1150	321-5022-00		RES,FXD,FILM:2.21K,1%,0.125W	01121	BCK2211FT
A62A1R1156	321-5047-00		RES,FXD,FILM:100K,1%,0.125W	01121	BCK1003FT
A62A1R1158	321-5044-00		RES,FXD,FILM:56.2 OHM,1%,0.125W	01121	BCK5620FT
A62A1R1162	321-5042-00		RES,FXD,FILM:39.2 OHM,1%,0.125W	57668	MCR18FWEA39E2
A62A1R1164	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A62A1R1176	321-5007-00		RES,FXD,FILM:121 OHM,1%,0.125W	01121	BCK1210FT
A62A1R1177	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A62A1R2001	321-5015-00		RES,FXD,FILM:562 OHM,1%,0.125W	01121	BCK5620FT
A62A1R2002	321-5010-00		RES,FXD,FILM:221 OHM,1%,0.125W	01121	BCK2211FT
A62A1R2003	321-5010-00		RES,FXD,FILM:221 OHM,1%,0.125W	01121	BCK2211FT
A62A1R2004	321-5013-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A62A1R2005	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A62A1R2012	321-5045-00		RES,FXD,FILM:68.1 OHM,1%,0.125W	01121	BCK6811FT

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A62A1R2013	321-5045-00		RES, FXD, FILM: 68.1 OHM, 1%, 0.125W	01121	BCK68R1FT
A62A1R2021	321-5045-00		RES, FXD, FILM: 68.1 OHM, 1%, 0.125W	01121	BCK68R1FT
A62A1R2023	321-5009-00		RES, FXD, FILM: 182 OHM, 1%, 0.125W	01121	BCK1820FT
A62A1R2024	321-5016-00		RES, FXD, FILM: 681 OHM, 1%, 0.125W	01121	BCK6810FT
A62A1R2025	321-5005-00		RES, FXD, FILM: 27.4 OHM, 1%, 0.125W	57668	MCR18EZHFW 27E4
A62A1R2027	321-5044-00		RES, FXD, FILM: 56.2 OHM, 1%, 0.125W	01121	BCK56R2FT
A62A1R2028	321-5006-00		RES, FXD, FILM: 100 OHM, 1%, 0.125W	01121	BCK1000FT
A62A1R2029	307-0610-00		RES NTWK, FXD, FI: LOG AMP RES PACK	80009	307-0610-00
A62A1R2034	307-0610-00		RES NTWK, FXD, FI: LOG AMP RES PACK	80009	307-0610-00
A62A1R2041	307-0610-00		RES NTWK, FXD, FI: LOG AMP RES PACK	80009	307-0610-00
A62A1R2047	307-0610-00		RES NTWK, FXD, FI: LOG AMP RES PACK	80009	307-0610-00
A62A1R2055	307-0610-00		RES NTWK, FXD, FI: LOG AMP RES PACK	80009	307-0610-00
A62A1R2056	321-5006-00		RES, FXD, FILM: 100 OHM, 1%, 0.125W	01121	BCK1000FT
A62A1R2060	307-0610-00		RES NTWK, FXD, FI: LOG AMP RES PACK	80009	307-0610-00
A62A1R2061	321-5016-00		RES, FXD, FILM: 681 OHM, 1%, 0.125W	01121	BCK6810FT
A62A1R2067	321-5051-00		RES, FXD, FILM: 0 OHM, 1%, 0.125W	80009	321-5051-00
A62A1R2068	307-0610-00		RES NTWK, FXD, FI: LOG AMP RES PACK	80009	307-0610-00
A62A1R2072	321-5028-00		RES, FXD, FILM: 6.81K, 1%, 0.125W	01121	BCK6811FT
A62A1R2074	321-5011-00		RES, FXD, FILM: 274 OHM, 1%, 0.125W	01121	BCK2740FT
A62A1R2076	321-5017-00		RES, FXD, FILM: 825 OHM, 1%, 0.125W	01121	BCK8250FT
A62A1R2077	321-5045-00		RES, FXD, FILM: 68.1 OHM, 1%, 0.125W	01121	BCK68R1FT
A62A1R2078	321-5038-00		RES, FXD, FILM: 47.5K, 1%, 0.125W	01121	BCK4752FT
A62A1R2079	321-5043-00		RES, FXD, FILM: 47.5 OHM, 1%, 0.125W	57668	MCR18FWEA47E5
A62A1R2113	321-5044-00		RES, FXD, FILM: 56.2 OHM, 1%, 0.125W	01121	BCK56R2FT
A62A1R2116	321-5018-00		RES, FXD, FILM: 1.00K, 1%, 0.125W	01121	BCK1001FT
A62A1R2117	321-5029-00		RES, FXD, FILM: 8.25K, 1%, 0.125W	01121	BCK8251FT
A62A1R2118	321-5015-00		RES, FXD, FILM: 562 OHM, 1%, 0.125W	01121	BCK5620FT
A62A1R2122	321-5015-00		RES, FXD, FILM: 562 OHM, 1%, 0.125W	01121	BCK5620FT
A62A1R2125	321-5038-00		RES, FXD, FILM: 47.5K, 1%, 0.125W	01121	BCK4752FT
A62A1R2126	321-5047-00		RES, FXD, FILM: 100K, 1%, 0.125W	01121	BCK1003FT
A62A1R2129	321-5022-00		RES, FXD, FILM: 2.21K, 1%, 0.125W	01121	BCK2211FT
A62A1R2130	321-5008-00		RES, FXD, FILM: 150 OHM, 1%, 0.125W	01121	BCK1500FT
A62A1R2131	321-5038-00		RES, FXD, FILM: 47.5K, 1%, 0.125W	01121	BCK4752FT
A62A1R2132	321-5023-00		RES, FXD, FILM: 2.74K, 1%, 0.125W	01121	BCK2741FT
A62A1R2133	321-5026-00		RES, FXD, FILM: 4.75K, 1%, 0.125W	01121	BCK4751FT
A62A1R2136	321-5022-00		RES, FXD, FILM: 2.21K, 1%, 0.125W	01121	BCK2211FT
A62A1R2137	321-5008-00		RES, FXD, FILM: 150 OHM, 1%, 0.125W	01121	BCK1500FT
A62A1R2138	321-5016-00		RES, FXD, FILM: 681 OHM, 1%, 0.125W	01121	BCK6810FT
A62A1R2139	321-5022-00		RES, FXD, FILM: 2.21K, 1%, 0.125W	01121	BCK2211FT
A62A1R2156	321-5028-00		RES, FXD, FILM: 6.81K, 1%, 0.125W	01121	BCK6811FT
A62A1R2157	321-5023-00		RES, FXD, FILM: 2.74K, 1%, 0.125W	01121	BCK2741FT
A62A1R2163	321-5028-00		RES, FXD, FILM: 6.81K, 1%, 0.125W	01121	BCK6811FT
A62A1R2164	321-5024-00		RES, FXD, FILM: 3.32K, 1%, 0.125W	01121	BCK3321FT
A62A1R2165	321-5034-00		RES, FXD, FILM: 22.1K, 1%, 0.125W	01121	BCK2212FT
A62A1R2171	321-5023-00		RES, FXD, FILM: 2.74K, 1%, 0.125W	01121	BCK2741FT
A62A1R2172	321-5029-00		RES, FXD, FILM: 8.25K, 1%, 0.125W	01121	BCK8251FT
A62A1R2174	321-5014-00		RES, FXD, FILM: 475 OHM, 1%, 0.125W	01121	BCK4750FT
A62A1R2176	321-5046-00		RES, FXD, FILM: 82.5 OHM, 1%, 0.125W	01121	BCK82R5FT
A62A1R2177	321-5017-00		RES, FXD, FILM: 825 OHM, 1%, 0.125W	01121	BCK8250FT
A62A1R2178	321-5043-00		RES, FXD, FILM: 47.5 OHM, 1%, 0.125W	57668	MCR18FWEA47E5
A62A1R3125	321-5047-00		RES, FXD, FILM: 100K, 1%, 0.125W	01121	BCK1003FT
A62A1R3126	321-5047-00		RES, FXD, FILM: 100K, 1%, 0.125W	01121	BCK1003FT
A62A1R3127	321-5047-00		RES, FXD, FILM: 100K, 1%, 0.125W	01121	BCK1003FT
A62A1R3130	321-5047-00		RES, FXD, FILM: 100K, 1%, 0.125W	01121	BCK1003FT
A62A1R3131	321-5047-00		RES, FXD, FILM: 100K, 1%, 0.125W	01121	BCK1003FT
A62A1R3157	321-5007-00		RES, FXD, FILM: 121 OHM, 1%, 0.125W	01121	BCK1210FT
A62A1R3164	321-5011-00		RES, FXD, FILM: 274 OHM, 1%, 0.125W	01121	BCK2740FT
A62A1R3171	321-5024-00		RES, FXD, FILM: 3.32K, 1%, 0.125W	01121	BCK3321FT



Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A62A1R4043	321-5024-00		RES, FXD, FILM: 3.32K, 1%, 0.125W	01121	BCK3321FT
A62A1R4044	321-5018-00		RES, FXD, FILM: 1.00K, 1%, 0.125W	01121	BCK1001FT
A62A1R4045	321-5048-00		RES, FXD, FILM: 332K, 1%, 0.125W	01121	BCK3323FT
A62A1R4046	321-5014-00		RES, FXD, FILM: 475 OHM, 1%, 0.125W	01121	BCK4750FT
A62A1R4047	321-5018-00		RES, FXD, FILM: 1.00K, 1%, 0.125W	01121	BCK1001FT
A62A1R4048	321-5008-00		RES, FXD, FILM: 150 OHM, 1%, 0.125W	01121	BCK1500FT
A62A1R4049	321-5012-00		RES, FXD, FILM: 332 OHM, 1%, 0.125W	01121	BCK3320FT
A62A1R4053	321-5043-00		RES, FXD, FILM: 47.5 OHM, 1%, 0.125W	57668	MCR18FWEA47E5
A62A1R4060	321-5031-00		RES, FXD, FILM: 12.1K, 1%, 0.125W	01121	BCK1212FT
A62A1R4061	321-5014-00		RES, FXD, FILM: 475 OHM, 1%, 0.125W	01121	BCK4750FT
A62A1R4062	321-5013-00		RES, FXD, FILM: 392 OHM, 1%, 0.125W	01121	BCK3920FT
A62A1R4064	321-5015-00		RES, FXD, FILM: 562 OHM, 1%, 0.125W	01121	BCK5620FT
A62A1R4065	321-5015-00		RES, FXD, FILM: 562 OHM, 1%, 0.125W	01121	BCK5620FT
A62A1R4066	321-5043-00		RES, FXD, FILM: 47.5 OHM, 1%, 0.125W	57668	MCR18FWEA47E5
A62A1R4067	321-5015-00		RES, FXD, FILM: 562 OHM, 1%, 0.125W	01121	BCK5620FT
A62A1R4068	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A62A1R4132	321-5026-00		RES, FXD, FILM: 4.75K, 1%, 0.125W	01121	BCK4751FT
A62A1R4133	321-5008-00		RES, FXD, FILM: 150 OHM, 1%, 0.125W	01121	BCK1500FT
A62A1R4134	321-5043-00		RES, FXD, FILM: 47.5 OHM, 1%, 0.125W	57668	MCR18FWEA47E5
A62A1R4135	321-5026-00		RES, FXD, FILM: 4.75K, 1%, 0.125W	01121	BCK4751FT
A62A1R4136	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A62A1R4140	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A62A1R4141	321-5034-00		RES, FXD, FILM: 22.1K, 1%, 0.125W	01121	BCK2212FT
A62A1R4142	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A62A1R4143	321-5033-00		RES, FXD, FILM: 18.2K, 1%, 0.125W	01121	BCK1822FT
A62A1R4144	321-5037-00		RES, FXD, FILM: 39.2K, 1%, 0.125W	01121	BCK3922FT
A62A1R4145	321-5037-00		RES, FXD, FILM: 39.2K, 1%, 0.125W	01121	BCK3922FT
A62A1R4146	321-5049-00		RES, FXD, FILM: 1 MEG, 1%, 0.125W	01121	BCK1004FT
A62A1R4147	321-5049-00		RES, FXD, FILM: 1 MEG, 1%, 0.125W	01121	BCK1004FT
A62A1R4148	321-5037-00		RES, FXD, FILM: 39.2K, 1%, 0.125W	01121	BCK3922FT
A62A1R4149	321-5036-00		RES, FXD, FILM: 33.2K, 1%, 0.125W	01121	BCK3322FT
A62A1R4150	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A62A1R4152	321-5023-00		RES, FXD, FILM: 2.74K, 1%, 0.125W	01121	BCK2741FT
A62A1R4153	321-5035-00		RES, FXD, FILM: 27.4K, 1%, 0.125W	01121	BCK2742FT
A62A1R4154	321-5021-00		RES, FXD, FILM: 1.82K, 1%, 0.125W	01121	BCK1821FT
A62A1R4155	321-5024-00		RES, FXD, FILM: 3.32K, 1%, 0.125W	01121	BCK3321FT
A62A1R4156	321-5037-00		RES, FXD, FILM: 39.2K, 1%, 0.125W	01121	BCK3922FT
A62A1R4157	321-5027-00		RES, FXD, FILM: 5.62K, 1%, 0.125W	01121	BCK5621FT
A62A1R4160	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A62A1R4161	321-5049-00		RES, FXD, FILM: 1 MEG, 1%, 0.125W	01121	BCK1004FT
A62A1R4162	321-5033-00		RES, FXD, FILM: 18.2K, 1%, 0.125W	01121	BCK1822FT
A62A1R4163	321-5049-00		RES, FXD, FILM: 1 MEG, 1%, 0.125W	01121	BCK1004FT
A62A1R4164	321-5034-00		RES, FXD, FILM: 22.1K, 1%, 0.125W	01121	BCK2212FT
A62A1R4165	321-5024-00		RES, FXD, FILM: 3.32K, 1%, 0.125W	01121	BCK3321FT
A62A1R4166	321-5051-00		RES, FXD, FILM: 0 OHM, 1%, 0.125W	80009	321-5051-00
A62A1R4167	321-5038-00		RES, FXD, FILM: 47.5K, 1%, 0.125W	01121	BCK4752FT
A62A1R4168	321-5047-00		RES, FXD, FILM: 100K, 1%, 0.125W	01121	BCK1003FT
A62A1R4176	321-5000-00		RES, FXD, FILM: 10 OHM, 1%, 0.125W	57668	MCR18EZHF10E
A62A1R4177	321-5000-00		RES, FXD, FILM: 10 OHM, 1%, 0.125W	57668	MCR18EZHF10E
A62A1R5046	321-5044-00		RES, FXD, FILM: 56.2 OHM, 1%, 0.125W	01121	BCD56R2FT
A62A1R5047	321-5000-00		RES, FXD, FILM: 10 OHM, 1%, 0.125W	57668	MCR18EZHF10E
A62A1R5048	321-5038-00		RES, FXD, FILM: 47.5K, 1%, 0.125W	01121	BCK4752FT
A62A1R5049	321-5006-00		RES, FXD, FILM: 100 OHM, 1%, 0.125W	01121	BCK1000FT
A62A1R5052	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A62A1R5056	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A62A1R5126	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A62A1R5142	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A62A1R5143	321-5030-00		RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Dscont			
A62A1R5144	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A62A1R5145	321-5034-00			RES,FXD,FILM:22.1K,1%,0.125W	01121	BCK2212FT
A62A1R5146	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A62A1R5147	321-5034-00			RES,FXD,FILM:22.1K,1%,0.125W	01121	BCK2212FT
A62A1R5148	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A62A1R5149	321-5026-00			RES,FXD,FILM:4.75K,1%,0.125W	01121	BCK4751FT
A62A1R5150	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A62A1R5151	321-5018-00			RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A62A1R5152	321-5043-00			RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A62A1R5153	321-5024-00			RES,FXD,FILM:3.32K,1%,0.125W	01121	BCK3321FT
A62A1R5154	321-5018-00			RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A62A1R5155	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A62A1R5156	321-5014-00			RES,FXD,FILM:475 OHM,1%,0.125W	01121	BCK4750FT
A62A1R5157	321-5038-00			RES,FXD,FILM:47.5K,1%,0.125W	01121	BCK4752FT
A62A1R5158	321-5048-00			RES,FXD,FILM:332K,1%,0.125W	01121	BCK3323FT
A62A1R5159	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A62A1R5160	321-5047-00			RES,FXD,FILM:100K,1%,0.125W	01121	BCK1003FT
A62A1R5161	321-5047-00			RES,FXD,FILM:100K,1%,0.125W	01121	BCK1003FT
A62A1R5162	321-5033-00			RES,FXD,FILM:18.2K,1%,0.125W	01121	BCK1822FT
A62A1R5163	321-5047-00			RES,FXD,FILM:100K,1%,0.125W	01121	BCK1003FT
A62A1R5164	321-5022-00			RES,FXD,FILM:2.21K,1%,0.125W	01121	BCK2211FT
A62A1R5165	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A62A1R5166	321-5043-00			RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A62A1R5167	321-5014-00			RES,FXD,FILM:475 OHM,1%,0.125W	01121	BCK4750FT
A62A1R5168	321-5006-00			RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A62A1R5169	321-5030-00			RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A62A1R5170	321-5006-00			RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A62A1R5171	321-5036-00			RES,FXD,FILM:33.2K,1%,0.125W	01121	BCK3322FT
A62A1R6046	321-5024-00			RES,FXD,FILM:3.32K,1%,0.125W	01121	BCK3321FT
A62A1R6047	321-5006-00			RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A62A1R6049	321-5047-00			RES,FXD,FILM:100K,1%,0.125W	01121	BCK1003FT
A62A1R6058	321-5049-00			RES,FXD,FILM:1 MEG,1%,0.125W	01121	BCK1004FT
A62A1R6059	321-5038-00			RES,FXD,FILM:47.5K,1%,0.125W	01121	BCK4752FT
A62A1R6166	321-5000-00			RES,FXD,FILM:10 OHM,1%,0.125W	57668	MCR18EZHFW10E
A62A1R6167	321-5000-00			RES,FXD,FILM:10 OHM,1%,0.125W	57668	MCR18EZHFW10E
A62A1R6171	321-5000-00			RES,FXD,FILM:10 OHM,1%,0.125W	57668	MCR18EZHFW10E
A62A1R6172	321-5000-00			RES,FXD,FILM:10 OHM,1%,0.125W	57668	MCR18EZHFW10E
A62A1R6175	321-5000-00			RES,FXD,FILM:10 OHM,1%,0.125W	57668	MCR18EZHFW10E
A62A1R6176	321-5000-00			RES,FXD,FILM:10 OHM,1%,0.125W	57668	MCR18EZHFW10E
A62A1R6177	321-5000-00			RES,FXD,FILM:10 OHM,1%,0.125W	57668	MCR18EZHFW10E
A62A1R6178	321-5000-00			RES,FXD,FILM:10 OHM,1%,0.125W	57668	MCR18EZHFW10E
A62A1R6179	321-5037-00			RES,FXD,FILM:39.2K,1%,0.125W	01121	BCK3922FT
A62A1U4022	156-5044-00			MICROCKT,DGTL:LSTTL,OCTAL D FLIP FLOP W/CLO CK ENABLE	80009	156-5044-00
A62A1U4028	156-5262-00			MICROCKT,LINER:BIPOLAR QUAD COMPARATOR	80009	156-5262-00
A62A1U4029	156-5262-00			MICROCKT,LINER:BIPOLAR QUAD COMPARATOR	80009	156-5262-00
A62A1U4055	155-0116-00			MICROCKT,LINER:QUAD OPNL AMPL	80009	155-0116-00
A62A1U5022	156-5044-00			MICROCKT,DGTL:LSTTL,OCTAL D FLIP FLOP W/CLO CK ENABLE	80009	156-5044-00
A62A1U5029	156-5043-00			MICROCKT,LINER:DAC,8 BIT,DAC-08E	80009	156-5043-00
A62A1U5032	156-5015-00			MICROCKT,DGTL:HEX INVERTER	01295	SN74LS04D
A62A1U5040	156-5033-00			MICROCKT,DGTL:LSTTL,3 TO 8 LINE DCDR/DEMUX	18324	74LS138D
A64	672-0162-04			CIRCUIT BD ASSY:DEFLECTION AMP	80009	672-0162-04
A64	672-1300-00	B010130		CIRCUIT BD ASSY:DEFLECTION AMP (OPTION 43 ONLY)	80009	672-1300-00
A64A1	671-0372-01			CIRCUIT BD ASSY:DEFLECTION AMP	80009	671-0372-01
A64A1	671-0803-00	B010130		CIRCUIT BD ASSY:DEFLECTION AMP (OPTION 43 ONLY)	80009	671-0803-00

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Discont			
A64A1C1030	281-0226-00			CAP, VAR, PLASTIC:4-38PF, 100V	52769	GXD38000
A64A1C1040	281-0226-00			CAP, VAR, PLASTIC:4-38PF, 100V	52769	GXD38000
A64A1C1066	283-0158-00			CAP, FXD, CER DI: 1PF, +/-0.1PF, 50V	51642	100-050-NP0-109B
A64A1C1100	283-0187-00			CAP, FXD, CER DI: 0.047UF, 10%, 400V	04222	SR308C473KAA
A64A1C2010	281-0538-00			CAP, FXD, CER DI: 1PF, 20%, 500V	54583	MA12COG2H010M
A64A1C2020	283-0139-00			CAP, FXD, CER DI: 150PF, 20%, 50V	05397	C312C151M5G5CA
A64A1C2028	281-0898-00			CAP, FXD, CER DI: 7.5PF, +/-0.5PF, 500V	96733	XR3446
A64A1C2030	283-0139-00			CAP, FXD, CER DI: 150PF, 20%, 50V	05397	C312C151M5G5CA
A64A1C2031	281-0898-00			CAP, FXD, CER DI: 7.5PF, +/-0.5PF, 500V	96733	XR3446
A64A1C2047	281-0538-00			CAP, FXD, CER DI: 1PF, 20%, 500V	54583	MA12COG2H010M
A64A1C2055	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C2056	283-0330-00			CAP, FXD, CER DI: 100PF, 5%, 50V	05397	C320C101J5R5CA
A64A1C2062	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C3030	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C3031	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C3046	283-0187-00			CAP, FXD, CER DI: 0.047UF, 10%, 400V	04222	SR308C473KAA
A64A1C3060	281-0226-00			CAP, VAR, PLASTIC:4-38PF, 100V	52769	GXD38000
A64A1C3068	283-0187-00			CAP, FXD, CER DI: 0.047UF, 10%, 400V	04222	SR308C473KAA
A64A1C3075	283-0187-00			CAP, FXD, CER DI: 0.047UF, 10%, 400V	04222	SR308C473KAA
A64A1C3080	281-0226-00			CAP, VAR, PLASTIC:4-38PF, 100V	52769	GXD38000
A64A1C3092	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C3095	281-0538-00			CAP, FXD, CER DI: 1PF, 20%, 500V	54583	MA12COG2H010M
A64A1C3100	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C3115	283-0187-00			CAP, FXD, CER DI: 0.047UF, 10%, 400V	04222	SR308C473KAA
A64A1C4028	283-0187-00			CAP, FXD, CER DI: 0.047UF, 10%, 400V	04222	SR308C473KAA
A64A1C4029	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C4030	283-0187-00			CAP, FXD, CER DI: 0.047UF, 10%, 400V	04222	SR308C473KAA
A64A1C4031	283-0187-00			CAP, FXD, CER DI: 0.047UF, 10%, 400V	04222	SR308C473KAA
A64A1C4048	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C4069	281-0538-00			CAP, FXD, CER DI: 1PF, 20%, 500V	54583	MA12COG2H010M
A64A1C4080	283-0139-00			CAP, FXD, CER DI: 150PF, 20%, 50V	05397	C312C151M5G5CA
A64A1C4085	281-0898-00			CAP, FXD, CER DI: 7.5PF, +/-0.5PF, 500V	96733	XR3446
A64A1C4092	281-0898-00			CAP, FXD, CER DI: 7.5PF, +/-0.5PF, 500V	96733	XR3446
A64A1C4108	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C5070	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C5071	281-0811-00			CAP, FXD, CER DI: 10PF, 10%, 100V	04222	MA101A100KAA
A64A1C5090	283-0139-00			CAP, FXD, CER DI: 150PF, 20%, 50V	05397	C312C151M5G5CA
A64A1C6038	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C6058	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C6064	283-0139-00			CAP, FXD, CER DI: 150PF, 20%, 50V	05397	C312C151M5G5CA
A64A1C6065	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A64A1C6078	281-0181-00			CAP, VAR, MICA DI: 7-80PF, 500V	TK0272	T51317-10
A64A1C7020	283-0189-00			CAP, FXD, CER DI: 0.1UF, 20%, 400V	96733	R3014
A64A1C7025	283-0189-00			CAP, FXD, CER DI: 0.1UF, 20%, 400V	96733	R3014
A64A1C7035	283-0065-00			CAP, FXD, CER DI: 0.001UF, 5%, 50V	59660	0835-591Y5E0102J
A64A1C7061	283-0177-00			CAP, FXD, CER DI: 1UF, +80-20%, 25V	04222	SR305E105ZAA
A64A1C7071	283-0177-00			CAP, FXD, CER DI: 1UF, +80-20%, 25V	04222	SR305E105ZAA
A64A1C7073	283-0177-00			CAP, FXD, CER DI: 1UF, +80-20%, 25V	04222	SR305E105ZAA
A64A1C7085	283-0177-00			CAP, FXD, CER DI: 1UF, +80-20%, 25V	04222	SR305E105ZAA
A64A1C7090	283-0177-00			CAP, FXD, CER DI: 1UF, +80-20%, 25V	04222	SR305E105ZAA
A64A1C7100	283-0177-00			CAP, FXD, CER DI: 1UF, +80-20%, 25V	04222	SR305E105ZAA
A64A1CR1080	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR1100	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR2020	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR2040	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR3040	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR4020	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A64A1CR4051	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A64A1CR4052	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A64A1CR4056	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A64A1CR4058	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A64A1CR4063	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A64A1CR4064	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A64A1CR4080	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A64A1CR4100	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A64A1CR5054	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A64A1CR5055	152-0141-02		SEMICONDCVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A64A1L7061	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A64A1L7069	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A64A1L7090	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A64A1L7100	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A64A1Q1070	151-1246-00		TRANSISTOR:PWR MOSFET,P CHAN,400V,15 OHM	80009	151-1246-00
A64A1Q1090	151-1246-00		TRANSISTOR:PWR MOSFET,P CHAN,400V,15 OHM	80009	151-1246-00
A64A1Q2070	151-1258-00		TRANSISTOR:PWR MOSFET,N CHAN,400V,8 OHM	80009	151-1258-00
A64A1Q2075	151-0220-00		TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q2090	151-1258-00		TRANSISTOR:PWR MOSFET,N CHAN,400V,8 OHM	80009	151-1258-00
A64A1Q2095	151-0220-00		TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q3026	151-0220-00		TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q3027	151-0190-00		TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A64A1Q3046	151-0220-00		TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q3047	151-0190-00		TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A64A1Q3090	151-0220-00		TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q3095	151-0190-00		TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A64A1Q4010	151-1246-00		TRANSISTOR:PWR MOSFET,P CHAN,400V,15 OHM	80009	151-1246-00
A64A1Q4020	151-1258-00		TRANSISTOR:PWR MOSFET,N CHAN,400V,8 OHM	80009	151-1258-00
A64A1Q4030	151-1258-00		TRANSISTOR:PWR MOSFET,N CHAN,400V,8 OHM	80009	151-1258-00
A64A1Q4040	151-1246-00		TRANSISTOR:PWR MOSFET,P CHAN,400V,15 OHM	80009	151-1246-00
A64A1Q4078	151-0220-00		TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q5020	151-0220-00		TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q5040	151-0220-00		TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1Q5090	151-0190-00		TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A64A1Q5095	151-0220-00		TRANSISTOR:PNP,SI,TO-92	80009	151-0220-00
A64A1R1010	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R1020	315-0153-00		RES,FXD,FILM:15K OHM,5%,0.25W	19701	5043CX15K00J
A64A1R1022	321-0378-00		RES,FXD,FILM:84.5K OHM,1%,0.125W,TC=TO	07716	CEAD84501F
A64A1R1025	321-0347-00		RES,FXD,FILM:40.2K OHM,1%,0.125W,TC=TO	91637	CMF55116G40201F
A64A1R1038	315-0153-00		RES,FXD,FILM:15K OHM,5%,0.25W	19701	5043CX15K00J
A64A1R1039	321-0347-00		RES,FXD,FILM:40.2K OHM,1%,0.125W,TC=TO	91637	CMF55116G40201F
A64A1R1055	311-1245-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3386X-DY6-103
A64A1R1066	311-1245-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3386X-DY6-103
A64A1R1085	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A64A1R1086	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A64A1R1088	321-0286-00		RES,FXD,FILM:9.31K OHM,1%,0.125W,TC=TO	19701	5043ED9K310F
A64A1R1090	321-0264-00		RES,FXD,FILM:5.49K OHM,1%,0.125W,TC=TO	07716	CEAD54900C
A64A1R1100	315-0560-00		RES,FXD,FILM:56 OHM,5%,0.25W	57668	NTR25J-E56E0
A64A1R1105	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A64A1R2010	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R2020	321-0378-00		RES,FXD,FILM:84.5K OHM,1%,0.125W,TC=TO	07716	CEAD84501F
A64A1R2028	315-0391-00		RES,FXD,FILM:390 OHM,5%,0.25W	57668	NTR25J-E390E
A64A1R2031	321-0347-00		RES,FXD,FILM:40.2K OHM,1%,0.125W,TC=TO	91637	CMF55116G40201F
A64A1R2035	315-0391-00		RES,FXD,FILM:390 OHM,5%,0.25W	57668	NTR25J-E390E
A64A1R2041	321-0378-00		RES,FXD,FILM:84.5K OHM,1%,0.125W,TC=TO	07716	CEAD84501F
A64A1R2049	323-0620-00		RES,FXD,FILM:800K OHM,1%,0.5W,TC=TO	91637	MFF1226G80002F
A64A1R2057	321-0372-00		RES,FXD,FILM:73.2K OHM,1%,0.125W,TC=TO	07716	CEAD73201F
A64A1R2059	321-0415-00		RES,FXD,FILM:205K OHM,1%,0.125W,TC=TO	07716	CEAD20502F
A64A1R2062	321-0409-00		RES,FXD,FILM:178K OHM,1%,0.125W,TC=TO	57668	CRB25 FXE 178K

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A64A1R2066	321-0382-00		RES,FXD,FILM:93.1K OHM,1%,0.125W,TC=TO	07716	CEAD93101F
A64A1R2079	315-0560-00		RES,FXD,FILM:56 OHM,5%,0.25W	57668	NTR25J-E56E0
A64A1R2082	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R2086	321-0172-00		RES,FXD,FILM:604 OHM,1%,0.125W,TC=TO	19701	5033ED604ROF
A64A1R2108	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R3010	323-0620-00		RES,FXD,FILM:800K OHM,1%,0.5W,TC=TO	91637	MFF1226G80002F
A64A1R3024	315-0301-00		RES,FXD,FILM:300 OHM,5%,0.25W	57668	NTR25J-E300E
A64A1R3025	315-0621-00		RES,FXD,FILM:620 OHM,5%,0.25W	57668	NTR25J-E620E
A64A1R3030	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A64A1R3038	315-0621-00		RES,FXD,FILM:620 OHM,5%,0.25W	57668	NTR25J-E620E
A64A1R3040	315-0301-00		RES,FXD,FILM:300 OHM,5%,0.25W	57668	NTR25J-E300E
A64A1R3047	315-0560-00		RES,FXD,FILM:56 OHM,5%,0.25W	57668	NTR25J-E56E0
A64A1R3070	323-0620-00		RES,FXD,FILM:800K OHM,1%,0.5W,TC=TO	91637	MFF1226G80002F
A64A1R3084	315-0621-00		RES,FXD,FILM:620 OHM,5%,0.25W	57668	NTR25J-E620E
A64A1R3085	301-0434-00		RES,FXD,FILM:430K OHM,5%,0.5W	19701	5053CX430K0J
A64A1R3098	323-0620-00		RES,FXD,FILM:800K OHM,1%,0.5W,TC=TO	91637	MFF1226G80002F
A64A1R3099	315-0560-00		RES,FXD,FILM:56 OHM,5%,0.25W	57668	NTR25J-E56E0
A64A1R3107	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A64A1R3108	321-0172-00		RES,FXD,FILM:604 OHM,1%,0.125W,TC=TO	19701	5033ED604ROF
A64A1R3110	321-0286-00		RES,FXD,FILM:9.31K OHM,1%,0.125W,TC=TO	19701	5043ED9K310F
A64A1R4020	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A64A1R4040	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A64A1R4045	315-0560-00		RES,FXD,FILM:56 OHM,5%,0.25W	57668	NTR25J-E56E0
A64A1R4046	321-0286-00		RES,FXD,FILM:9.31K OHM,1%,0.125W,TC=TO	19701	5043ED9K310F
A64A1R4047	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A64A1R4049	301-0434-00		RES,FXD,FILM:430K OHM,5%,0.5W	19701	5053CX430K0J
A64A1R4051	321-0286-00		RES,FXD,FILM:9.31K OHM,1%,0.125W,TC=TO	19701	5043ED9K310F
A64A1R4052	321-0318-00		RES,FXD,FILM:20.0K OHM,1%,0.125W,TC=TO	19701	5033ED20K00F
A64A1R4059	321-0379-00		RES,FXD,FILM:86.6K OHM,1%,0.125W,TC=TO	07716	CEAD86601F
A64A1R4061	321-0280-00		RES,FXD,FILM:8.06K OHM,1%,0.125W,TC=TO	19701	5033ED8K060F
A64A1R4062	321-0286-00		RES,FXD,FILM:9.31K OHM,1%,0.125W,TC=TO	19701	5043ED9K310F
A64A1R4064	321-0318-00		RES,FXD,FILM:20.0K OHM,1%,0.125W,TC=TO	19701	5033ED20K00F
A64A1R4065	321-0416-00		RES,FXD,FILM:210K OHM,1%,0.125W,TC=TO	07716	CEAD21002F
A64A1R4067	321-0282-00		RES,FXD,FILM:8.45K OHM,1%,0.125W,TC=TO	07716	CFAD84500F
A64A1R4069	321-0416-00		RES,FXD,FILM:210K OHM,1%,0.125W,TC=TO	07716	CEAD21002F
A64A1R4072	315-0153-00		RES,FXD,FILM:15K OHM,5%,0.25W	19701	5043CX15K00J
A64A1R4074	321-0378-00		RES,FXD,FILM:84.5K OHM,1%,0.125W,TC=TO	07716	CEAD84501F
A64A1R4076	321-0378-00		RES,FXD,FILM:84.5K OHM,1%,0.125W,TC=TO	07716	CEAD84501F
A64A1R4079	321-0347-00		RES,FXD,FILM:40.2K OHM,1%,0.125W,TC=TO	91637	CMF55116G40201F
A64A1R4088	315-0391-00		RES,FXD,FILM:390 OHM,5%,0.25W	57668	NTR25J-E390E
A64A1R4089	315-0301-00		RES,FXD,FILM:300 OHM,5%,0.25W	57668	NTR25J-E300E
A64A1R4091	321-0347-00		RES,FXD,FILM:40.2K OHM,1%,0.125W,TC=TO	91637	CMF55116G40201F
A64A1R4092	321-0347-00		RES,FXD,FILM:40.2K OHM,1%,0.125W,TC=TO	91637	CMF55116G40201F
A64A1R4099	315-0391-00		RES,FXD,FILM:390 OHM,5%,0.25W	57668	NTR25J-E390E
A64A1R4105	321-0264-00		RES,FXD,FILM:5.49K OHM,1%,0.125W,TC=TO	07716	CEAD54900C
A64A1R4110	301-0434-00		RES,FXD,FILM:430K OHM,5%,0.5W	19701	5053CX430K0J
A64A1R5010	315-0560-00		RES,FXD,FILM:56 OHM,5%,0.25W	57668	NTR25J-E56E0
A64A1R5020	311-1245-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3386X-DY6-103
A64A1R5025	321-0286-00		RES,FXD,FILM:9.31K OHM,1%,0.125W,TC=TO	19701	5043ED9K310F
A64A1R5030	311-1245-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3386X-DY6-103
A64A1R5032	321-0210-00		RES,FXD,FILM:1.50K OHM,1%,0.125W,TC=TO	19701	5033ED1K50F
A64A1R5034	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A64A1R5036	321-0264-00		RES,FXD,FILM:5.49K OHM,1%,0.125W,TC=TO	07716	CEAD54900C
A64A1R5038	321-0264-00		RES,FXD,FILM:5.49K OHM,1%,0.125W,TC=TO	07716	CEAD54900C
A64A1R5045	321-0210-00		RES,FXD,FILM:1.50K OHM,1%,0.125W,TC=TO	19701	5033ED1K50F
A64A1R5053	321-0335-00		RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A64A1R5056	321-0424-00		RES,FXD,FILM:255K OHM,1%,0.125W,TC=TO	07716	CEAD25502F
A64A1R5057	321-0412-00		RES,FXD,FILM:191K OHM,1%,0.125W,TC=TO	07716	CEAD19102F

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Discnt	Name & Description	Mfr. Code	Mfr. Part No.
A64A1R5058	321-0215-00		RES,FXD,FILM:1.69K OHM,1%,0.125W,TC=TO	07716	CEAD16900F
A64A1R5059	321-0412-00		RES,FXD,FILM:191K OHM,1%,0.125W,TC=TO	07716	CEAD19102F
A64A1R5062	321-0379-00		RES,FXD,FILM:86.6K OHM,1%,0.125W,TC=TO	07716	CEAD86601F
A64A1R5070	321-0420-00		RES,FXD,FILM:232K OHM,1%,0.125W,TC=TO	07716	CEAD23202F
A64A1R5078	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A64A1R5083	321-0398-00		RES,FXD,FILM:137K OHM,1%,0.125W,TC=TO	07716	CEAD13702F
A64A1R5086	321-0424-00		RES,FXD,FILM:255K OHM,1%,0.125W,TC=TO	07716	CEAD25502F
A64A1R5087	321-0285-00		RES,FXD,FILM:9.09K OHM,1%,0.125W,TC=TO	07716	CEAD90900F
A64A1R5087	321-0297-00	8010130	RES,FXD,FILM:12.1K OHM,1%,0.125W,TC=TO (OPTION 43 ONLY)	07716	CEAD12101F
A64A1R5090	315-0153-00		RES,FXD,FILM:15K OHM,5%,0.25W	19701	5043CX15K00J
A64A1R5092	321-0378-00		RES,FXD,FILM:84.5K OHM,1%,0.125W,TC=TO	07716	CEAD84501F
A64A1R5097	315-0301-00		RES,FXD,FILM:300 OHM,5%,0.25W	57668	NTR25J-E300E
A64A1R5098	315-0621-00		RES,FXD,FILM:620 OHM,5%,0.25W	57668	NTR25J-E620E
A64A1R6010	301-0434-00		RES,FXD,FILM:430K OHM,5%,0.5W	19701	5053CX430K0J
A64A1R6015	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A64A1R6020	321-0439-00		RES,FXD,FILM:365K OHM,1%,0.125W,TC=TO	07716	CEAD36502F
A64A1R6024	321-0338-00		RES,FXD,FILM:32.4K OHM,1%,0.125W,TC=TO	19701	5033ED32K40F
A64A1R6070	321-0335-00		RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A64A1R6071	321-0335-00		RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A64A1R6078	321-0335-00		RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A64A1R6095	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R6096	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R6098	315-0202-00		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A64A1R7020	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A64A1R7025	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A64A1R7035	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A64A1R7036	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A64A1R7037	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A64A1R7065	321-0335-00		RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A64A1R7070	321-0335-00		RES,FXD,FILM:30.1K OHM,1%,0.125W,TC=TO	57668	RB14FXE30K1
A64A1R7074	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A64A1R7075	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A64A1R7080	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10R000J
A64A1R7085	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10R000J
A64A1U2020	156-0742-02		MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A64A1U2030	156-0742-02		MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A64A1U2055	156-0742-02		MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A64A1U2062	156-0742-02		MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A64A1U4080	156-0742-02		MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A64A1U5090	156-0742-02		MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A64A1U6024	156-1226-01		MICROCKT,LINEAR:DUAL COMPARATOR,SCRN	27014	LM319J/A+
A64A1U6055	156-1211-00		MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	27014	LF13333N
A64A1U6065	156-0742-02		MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A64A1U6073	156-0742-02		MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A64A1U7055	156-1211-00		MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	27014	LF13333N
A64A1U7065	156-0742-02		MICROCKT,LINEAR:OPNL AMPL,SELECTED	27014	LM318N/A+
A64A1U7073	156-0158-04		MICROCKT,LINEAR:DUAL OPNL AMPL	01295	MC1458JG
A64A1VR1085	152-0243-00		SEMICONDC DVC,DI:ZEN,SI,15V,5%,0.4W,DO-7	14433	Z5412
A64A1VR3035	152-0279-00		SEMICONDC DVC,DI:ZEN,SI,5.1V,5%,0.4W,DO-7	14552	TD3810989
A64A1VR3099	152-0279-00		SEMICONDC DVC,DI:ZEN,SI,5.1V,5%,0.4W,DO-7	14552	TD3810989
A64A1VR3100	152-0243-00		SEMICONDC DVC,DI:ZEN,SI,15V,5%,0.4W,DO-7	14433	Z5412
A64A1VR4030	152-0243-00		SEMICONDC DVC,DI:ZEN,SI,15V,5%,0.4W,DO-7	14433	Z5412
A64A1VR5030	152-0243-00		SEMICONDC DVC,DI:ZEN,SI,15V,5%,0.4W,DO-7	14433	Z5412
A6E	672-0159-00		CIRCUIT BD ASSY:CRT READOUT	80009	672-0159-00
A66A1	670-7902-00		CIRCUIT BD ASSY:CRT READOUT	80009	670-7902-00
A66A1C1011	283-0047-00		CAP,FXD,CER DI:270PF,5%,500V	59660	0831604Z5F0271J

Component No.	Tektronix	Serial/Assembly No.		Name & Description	Mfr.	Mfr. Part No.
	Part No.	Effective	Dscont		Code	
A66A1C1014	283-0197-00			CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A66A1C1015	283-0197-00			CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A66A1C1018	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C1023	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C1031	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C1043	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C1057	283-0051-00			CAP,FXD,CER DI:0.0033UF,5%,100V	04222	SR301A332JAA
A66A1C1058	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2012	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A66A1C2013	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2015	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2016	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2018	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2020	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2022	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2026	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2031	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2038	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2042	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C2056	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C3025	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C3026	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C3027	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A66A1C3028	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C3049	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C3056	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1C3057	283-0024-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	SR215C104MAA
A66A1CR1012	152-0322-00			SEMICON DVC,DI:SCHOTTKY,SI,1.5V,1.2PF,DO-35	50434	5082-2672
A66A1CR1013	152-0322-00			SEMICON DVC,DI:SCHOTTKY,SI,1.5V,1.2PF,DO-35	50434	5082-2672
A66A1L3055	108-0836-00			COIL,RF:FIXED,14UH	80009	108-0836-00
A66A1L3056	108-0537-00			COIL,RF:FIXED,200UH	80009	108-0537-00
A66A1L3059	108-0537-00			COIL,RF:FIXED,200UH	80009	108-0537-00
A66A1Q2024	151-0190-00			TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A66A1Q3018	151-0190-00			TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A66A1R1014	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A66A1R1015	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A66A1R1016	321-0307-00			RES,FXD,FILM:15.4K OHM,1%,0.125W,TC=T0	19701	5043ED15K40F
A66A1R1017	321-1313-08			RES,FXD,FILM:18K OHM,1%,0.125W,TC=T2	07716	CEAC18001F
A66A1R1026	315-0472-00			RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A66A1R1033	315-0472-00			RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A66A1R1040	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A66A1R1042	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A66A1R1056	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A66A1R1057	321-0366-00			RES,FXD,FILM:63.4K OHM,1%,0.125W,TC=T0	19701	5043ED63K40F
A66A1R1058	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A66A1R2012	321-0277-03			RES,FXD,FILM:7.50K OHM,0.25%,0.125W,TC=T2	01121	ORDER BY DESCR
A66A1R2013	321-0277-03			RES,FXD,FILM:7.50K OHM,0.25%,0.125W,TC=T2	01121	ORDER BY DESCR
A66A1R2016	321-0260-03			RES,FXD,FILM:4.99K OHM,0.25%,0.125W,T=T2	01121	ORDER BY DESCR
A66A1R2017	321-0281-07			RES,FXD,FILM:8.25K OHM,0.1%,0.125W,TC=T9	07716	CEAE82500B
A66A1R2018	321-0328-00			RES,FXD,FILM:25.5K OHM,1%,0.125W,TC=T0	19701	5043ED25K50F
A66A1R2019	315-0472-00			RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A66A1R2021	315-0153-00			RES,FXD,FILM:15K OHM,5%,0.25W	19701	5043CX15K00J
A66A1R2027	321-0242-00			RES,FXD,FILM:3.24K OHM,1%,0.125W,TC=T0	19701	5043ED3K240F
A66A1R2028	321-0296-00			RES,FXD,FILM:11.8K OHM,1%,0.125W,TC=T0	07716	CEAD11801F
A66A1R3014	321-0219-00			RES,FXD,FILM:1.87K OHM,1%,0.125W,TC=T0	07716	CEAD18700F
A66A1R3015	321-0301-00			RES,FXD,FILM:13.3K OHM,1%,0.125W,TC=T0	07716	CEAD13301F
A66A1R3025	321-0307-00			RES,FXD,FILM:15.4K OHM,1%,0.125W,TC=T0	19701	5043ED15K40F
A66A1R3026	321-0603-00			RES,FXD,FILM:15K OHM,0.25%,0.125W,TC=T2	19701	5033RC15K00C

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A66A1R3027	321-0303-00		RES,FXD,FILM:14.0K OHM,1%,0.125W,TC=10	07716	CEAD 14001F
A66A1R3028	321-1723-07		RES,FXD,FILM:3.15K OHM,0.1%,0.125W,TC=T9	19701	5033RE3K150B
A66A1U1016	156-0733-02		MICROCKT,DGTL:DUAL MONOSTABLE MV W/ST INP,S CRN	80009	156-0733-02
A66A1U1020	156-0391-02		MICROCKT,DGTL:HEX LATCH W/CLEAR,SCRN	80009	156-0391-02
A66A1U1025	156-0480-02		MICROCKT,DGTL:QUAD 2-INP & GATE,SCRN,	80009	156-0480-02
A66A1U1028	156-0385-02		MICROCKT,DGTL:HEX INVERTER,SCRN	80009	156-0385-02
A66A1U1033	156-0718-03		MICROCKT,DGTL:TRIPLE 3-INP NOR GATE,SCRN	80009	156-0718-03
A66A1U1037	156-0386-02		MICROCKT,DGTL:TRIPLE 3-INP NAND GATE,SCRN	80009	156-0386-02
A66A1U1041	156-1059-01		MICROCKT,DGTL:DUAL J-K EDGE TRIGGERED FF	80009	156-1059-01
A66A1U1046	156-0530-02		MICROCKT,DGTL:QUAD 2-INP MUX,SCRN	80009	156-0530-02
A66A1U1050	156-0798-02		MICROCKT,DGTL:DUAL 14/1-LINE SEL/MUX SCRN	80009	156-0798-02
A66A1U1055	156-0733-02		MICROCKT,DGTL:DUAL MONOSTABLE MV W/ST INP,S CRN	80009	156-0733-02
A66A1U2014	156-0844-02		MICROCKT,DGTL:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A(NP3)
A66A1U2018	156-0844-02		MICROCKT,DGTL:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A(NP3)
A66A1U2022	156-0844-02		MICROCKT,DGTL:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A(NP3)
A66A1U2026	156-0844-02		MICROCKT,DGTL:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A(NP3)
A66A1U2031	156-0469-02		MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A66A1U2035	156-0385-02		MICROCKT,DGTL:HEX INVERTER,SCRN	80009	156-0385-02
A66A1U2039	156-0386-02		MICROCKT,DGTL:TRIPLE 3-INP NAND GATE,SCRN	80009	156-0386-02
A66A1U2044	156-0479-02		MICROCKT,DGTL:QUAD 2-INP OR GATE,SCRN	80009	156-0479-02
A66A1U2048	156-1170-00		MICROCKT,DGTL:TTL,ROM,CHAR GEN	27014	DM86S64CAB/N
A66A1U2052	156-1614-00		IC,MEMORY:NMOS,SRAM;1K X 4,150NS;,,DIP18.3,C ERAMIC	34649	D2114AL-3
A66A1U2057	156-1614-00		IC,MEMORY:NMOS,SRAM;1K X 4,150NS;,,DIP18.3,C ERAMIC	34649	D2114AL-3
A66A1U3015	156-1255-00		MICROCKT,LINEAR:D/A CONVERTER,8 BIT	06665	DAC08-157Q
A66A1U3021	156-1211-00		MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	27014	LF13333N
A66A1U3029	156-1589-00		MICROCKT,LINEAR:D/A CONVERTER,12 BIT,HIGH S PEED,MONOLITHIC	06665	DAC312FR
A66A1U3034	156-0913-02		MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A66A1U3038	156-0982-03		MICROCKT,DGTL:OCTAL-D-EDGE TRIG FF,SCRN	80009	156-0982-03
A66A1U3042	156-0956-02		MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT,SCRN	80009	156-0956-02
A66A1U3047	156-0956-02		MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT,SCRN	80009	156-0956-02
A66A1U3051	156-0469-02		MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A66A1VR1025	152-0326-00		SEMICON DVC,DI:ZEN,SI,7.5V,5%,0.4W,DO-7	04713	SZ13927
A66A1VR1029	152-0326-00		SEMICON DVC,DI:ZEN,SI,7.5V,5%,0.4W,DO-7	04713	SZ13927
A68	644-0645-03		VAR RESOLN MDL:495/P	80009	644-0645-03
A68	644-0675-02		VAR RESOLN MDL:494/AP (OPTION 07 ONLY)	80009	644-0675-02
A68FL6015	119-1676-00		FILTER,BANDPASS:XTAL,10MHZ CTR FREQ,200HZ B W,TEMP COMP (MATCHED SET W/FL690 ON CHASSIS)	59492	001-37440
A68U3041	156-0277-01		MICROCKT,LINEAR:VOLTAGE RGLTR,POS 5V,SCRN	04713	MC7805CTD
A68W696	175-2417-00		CABLE ASSY,RF:50 OHM COAX,27.0 L	80009	175-2417-00
A68Y2036	119-0968-00		FILTER,BANDPASS:XTAL,6 POLE ML (MATCHED SET W/A68Y6050 & A68Y3046)	75378	965-0159
A68Y2043	119-0969-00		FILTER,BANDPASS:XTAL,4 POLE ML (MATCHED SET W/A68Y5040)	75378	965-0160
A68Y3046	119-0968-00		FILTER,BANDPASS:XTAL,6 POLE ML (MATCHED SET W/A68Y6050 & A68Y2036)	75378	965-0159
A68Y5040	119-0969-00		FILTER,BANDPASS:XTAL,4 POLE ML (MATCHED SET W/A68Y2043)	75378	965-0160
A68Y6050	119-0968-00		FILTER,BANDPASS:XTAL,6 POLE ML (MATCHED SET W/A68Y2036 & A68Y3046)	75378	965-0159
A68A1	670-5528-03		CIRCUIT BD ASSY:#1VR MOTHER	80009	670-5528-03
A68A1C1066	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C1067	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA



Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Dscont			
A68A1C1068	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C1069	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C1075	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C1082	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C1083	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C1084	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C1085	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C2076	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C2086	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C2088	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C3019	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C3026	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C3028	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C3029	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C3035	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C3043	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C3048	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C3049	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A1C3062	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A1C3066	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A1C3077	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A1L3065	108-0395-00			COIL,RF:FIXED,64UH	80009	108-0395-00
A68A1L3066	108-0395-00			COIL,RF:FIXED,64UH	80009	108-0395-00
A68A1P3072	131-2167-00			CONN,RCPT,ELEC:CKT BD,FEMALE,12/24	00779	85927-5
A68A1R1065	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R1066	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R1067	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R1068	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R1075	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R1082	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R1083	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R1084	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R1085	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R2076	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R2086	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R2088	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R3019	315-0270-00			RES,FXD,FILM:27 OHM,5%,0.25W	19701	5043CX27R00J
A68A1R3026	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R3028	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R3029	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R3035	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R3043	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R3048	307-0106-00			RES,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB 47G5
A68A1R3049	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A1R3081	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A68A2	670-5536-05			CIRCUIT BD ASSY:#2 V.R. MOTHER	80009	670-5536-05
A68A2C2011	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A2C2015	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A2C2018	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A2C2023	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A2C2033	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A2C3019	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A2C3027	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A2C3041	290-0340-00			CAP,FXD,ELCTLT:10UF,10%,50V	56289	109D106X9050C2
A68A2C3042	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A2C3043	283-0330-00			CAP,FXD,CER DI:100PF,5%,50V	05397	C320C101J5R5CA
A68A2C4027	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A2C4035	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A68A2C4037	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A2C4038	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A2C4039	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A2CR3020	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3021	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3022	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3023	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3024	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3025	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3026	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3027	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3031	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3033	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR3034	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2CR4029	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A2L4025	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A2L4031	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A2Q3035	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A68A2Q3036	151-0136-00		TRANSISTOR:NPN,SI,TO-39	02735	35495
A68A2Q4035	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A68A2Q4037	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A68A2R2014	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A68A2R2026	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A68A2R2031	311-0978-00		RES,VAR,NONWV:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R2033	321-0756-00		RES,FXD,FILM:50K OHM,1%,0.125W,TC=T0	24546	NA55D5002F
A68A2R2035	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=T0	19701	5033ED10K0F
A68A2R2038	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=T0	19701	5033ED10K0F
A68A2R3014	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A68A2R3015	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A68A2R3019	311-0978-00		RES,VAR,NONWV:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R3020	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=T0	07716	CEAD12401F
A68A2R3021	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=T0	07716	CEAD12401F
A68A2R3022	311-0978-00		RES,VAR,NONWV:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R3023	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=T0	07716	CEAD12401F
A68A2R3024	311-0978-00		RES,VAR,NONWV:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R3025	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=T0	07716	CEAD12401F
A68A2R3026	311-0978-00		RES,VAR,NONWV:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R3027	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=T0	07716	CEAD12401F
A68A2R3028	311-0978-00		RES,VAR,NONWV:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R3029	311-0978-00		RES,VAR,NONWV:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R3030	311-0978-00		RES,VAR,NONWV:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R3031	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=T0	07716	CEAD12401F
A68A2R3032	311-0978-00		RES,VAR,NONWV:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R3033	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=T0	07716	CEAD12401F
A68A2R3034	311-0978-00		RES,VAR,NONWV:TRMR,250 OHM,0.5W	73138	82PR250-37C
A68A2R3035	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A2R3036	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=T0	07716	CEAD12401F
A68A2R3037	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A68A2R3038	321-0239-00		RES,FXD,FILM:3.01K OHM,1%,0.125W,TC=T0	19701	5043ED3K010F
A68A2R3039	321-0260-00		RES,FXD,FILM:4.99K OHM,1%,0.125W,TC=T0	19701	5033ED4K990F
A68A2R3041	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=T0	19701	5033ED10K0F
A68A2R3042	321-0289-00		RES,FXD,FILM:10.0K OHM,1%,0.125W,TC=T0	19701	5033ED10K0F
A68A2R3043	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A2R3044	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A2R3045	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A68A2R4026	321-0298-00		RES,FXD,FILM:12.4K OHM,1%,0.125W,TC=T0	07716	CEAD12401F
A68A2R4029	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-EC2K2
A68A2R4031	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J

Component No.	Tektronix		Serial/Assembly No.	Name & Description	Mfr. Code	Mfr. Part No.
	Part No.	Effective Dscont				
A68A2R4039	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A68A2U3010	156-0913-02			MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A68A2U3017	156-0913-02			MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A68A2U3023	156-1235-00			MICROCKT,DGTL:LSTTL,BCD TO DEC DECODER/DR	01295	SN74LS145N3
A68A2U3038	156-0158-04			MICROCKT,LINEAR:DUAL OPNL AMPL	01295	MC1458JG
A68A2U4022	156-0469-02			MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A68A3	670-9843-00			CIRCUIT BD ASSY:VR INPUT	80009	670-9843-00
A68A3C1016	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A3C1019	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A3C1022	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A3C1025	283-0111-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A3C1026	281-0167-00			CAP,VAR,CER DI:9-45PF,200V	33095	53-717-001 D9-45
A68A3C1031	283-0869-00			CAP,FXD,CER DI:68PF,NPO,100V,1%	16299	SR151A680JAA
A68A3C1032	281-0799-00			CAP,FXD,CER DI:62PF,2%,100V	04222	MA101A620GAA
A68A3C1033	281-0167-00			CAP,VAR,CER DI:9-45PF,200V	33095	53-717-001 D9-45
A68A3C1035	281-0577-00			CAP,FXD,CER DI:14PF,5%,500V	52763	2RDPLZ007 14POJC
A68A3C1036	281-0799-00			CAP,FXD,CER DI:62PF,2%,100V	04222	MA101A620GAA
A68A3C1037	283-0869-00			CAP,FXD,CER DI:68PF,NPO,100V,1%	16299	SR151A680JAA
A68A3L1018	108-0395-00			COIL,RF:FIXED,64UH	80009	108-0395-00
A68A3L1027	108-0701-00			COIL,RF:FIXED,1.45UH	80009	108-0701-00
A68A3L1033	108-0701-00			COIL,RF:FIXED,1.45UH	80009	108-0701-00
A68A3Q1023	151-0650-00			TRANSISTOR:NPN,SI,TO-39	S0545	2SC1252
A68A3R1014	321-0114-00			RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150R0F
A68A3R1015	321-0114-00			RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150R0F
A68A3R1016	321-0054-00			RES,FXD,FILM:35.7 OHM,0.5%,0.125W,TC=TO MI	91637	CMF55116G35R70F
A68A3R1022	315-0270-00			RES,FXD,FILM:27 OHM,5%,0.25W	19701	5043CX27R00J
A68A3R1023	307-0113-00			RES,FXD,CMPSN:5.1 OHM,5%,0.25W	01121	CB51G5
A68A3R1024	315-0911-00			RES,FXD,FILM:910 OHM,5%,0.25W	57668	NTR25J-E910E
A68A3R1025	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A68A3R1026	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A68A3T1019	120-0459-00			XFMR,TOROID:	80009	120-0459-00
A68A4	670-9531-00			CIRCUIT BD ASSY:1ST FILTER SELECT	80009	670-9531-00
A68A4	670-9951-00			CIRCUIT BD ASSY:1ST FILTER SELECT (OPTION 07 ONLY)	80009	670-9951-00
A68A4C0114	283-5003-00			CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A68A4C1010	283-5003-00			CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A68A4C1011	283-5003-00			CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A68A4C1012	283-5003-00			CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A68A4C1016	283-5003-00			CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A68A4C1018	283-5003-00			CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A68A4C1019	283-5003-00			CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A68A4C1020	283-5003-00			CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A68A4C1022	283-5003-00			CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A68A4C1030	283-0213-00			CAP,FXD,CER DI:300PF,5%,100V	04222	3429-100A-301J
A68A4C1032	281-0765-00			CAP,FXD,CER DI:100PF,5%,100V	04222	MA101A101JAA
A68A4C1034	281-0205-00			CAP,VAR,PLASTIC:5.5-65 PF,100V	TK1727	2222-808-32659
A68A4C1040	281-0898-00			CAP,FXD,CER DI:7.5PF,+/-0.5PF,500V	96733	XR3446
A68A4C1044	281-0205-00			CAP,VAR,PLASTIC:5.5-65 PF,100V	TK1727	2222-808-32659
A68A4C1046	281-0205-00			CAP,VAR,PLASTIC:5.5-65 PF,100V	TK1727	2222-808-32659
A68A4C1050	281-0764-00			CAP,FXD,CER DI:82PF,5%,100V	04222	MA101A820JAA
A68A4C1052	283-0159-00			CAP,FXD,CER DI:18PF,5%,50V	04222	SR155A180JAA
A68A4C1054	283-0359-00			CAP,FXD,CER DI:1000PF,10%,200V	04222	SR212A102KAA
A68A4C1056	283-0359-00			CAP,FXD,CER DI:1000PF,10%,200V	04222	SR212A102KAA
A68A4C1057	283-5003-00			CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A68A4C1058	281-0765-00			CAP,FXD,CER DI:100PF,5%,100V	04222	MA101A101JAA
A68A4C1059	283-5003-00			CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A68A4C1060	283-0213-00			CAP,FXD,CER DI:300PF,5%,100V	04222	3429-100A-301J
A68A4C1067	283-5003-00			CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix		Serial/Assembly No.	Name & Description	Mfr.	
	Part No.	Effective Dscont			Code	Mfr. Part No.
A68A4C2010	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C2012	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C2014	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C2016	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C2018	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C2020	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C2030	281-0221-00			CAP, VAR, CER DI:2-10PF, 100V	72982	0513013A 2 0-10
A68A4C2050	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C2052	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C2053	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C2055	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C2056	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C2059	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C3010	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C3012	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C3013	281-0764-00			CAP, FXD, CER DI:82PF, 5%, 100V	04222	MA101A820JAA
A68A4C3016	283-0359-00			CAP, FXD, CER DI:1000PF, 10%, 200V	04222	SR212A102KAA
A68A4C3016	283-0398-00			CAP, FXD, CER DI:680PF, 2%, 100V (OPTION 07 ONLY)	04222	3429100A681G
A68A4C3018	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C3019	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C3029	283-0838-00			CAP, FXD, CER DI:18PF, 5%, 50V	80009	283-0838-00
A68A4C3030	281-0153-00			CAP, VAR, AIR DI:1.7-10PF, 250V	74970	187-0106-055
A68A4C3031	281-0764-00			CAP, FXD, CER DI:82PF, 5%, 100V	04222	MA101A820JAA
A68A4C3032	281-0810-00			CAP, FXD, CER DI:5.6PF, +/-0.5PF, 100V	04222	MA101A5R6DAA
A68A4C3032	283-0168-00			CAP, FXD, CER DI:12PF, 5%, 100V (OPTION 07 ONLY)	04222	SR151A120JAA
A68A4C3033	281-0810-00			CAP, FXD, CER DI:5.6PF, +/-0.5PF, 100V	04222	MA101A5R6DAA
A68A4C3034	283-0159-00			CAP, FXD, CER DI:18PF, 5%, 50V	04222	SR155A180JAA
A68A4C3035	281-0811-00			CAP, FXD, CER DI:10PF, 10%, 100V	04222	MA101A100KAA
A68A4C3037	281-0810-00			CAP, FXD, CER DI:5.6PF, +/-0.5PF, 100V	04222	MA101A5R6DAA
A68A4C3039	281-0153-00			CAP, VAR, AIR DI:1.7-10PF, 250V	74970	187-0106-055
A68A4C3040	281-0810-00			CAP, FXD, CER DI:5.6PF, +/-0.5PF, 100V	04222	MA101A5R6DAA
A68A4C3040	283-0168-00			CAP, FXD, CER DI:12PF, 5%, 100V (OPTION 07 ONLY)	04222	SR151A120JAA
A68A4C3041	281-0810-00			CAP, FXD, CER DI:5.6PF, +/-0.5PF, 100V	04222	MA101A5R6DAA
A68A4C3042	281-0811-00			CAP, FXD, CER DI:10PF, 10%, 100V	04222	MA101A100KAA
A68A4C3045	281-0153-00			CAP, VAR, AIR DI:1.7-10PF, 250V	74970	187-0106-055
A68A4C3046	283-0838-00			CAP, FXD, CER DI:18PF, 5%, 50V	80009	283-0838-00
A68A4C3047	283-0159-00			CAP, FXD, CER DI:18PF, 5%, 50V	04222	SR155A180JAA
A68A4C3049	281-0764-00			CAP, FXD, CER DI:82PF, 5%, 100V	04222	MA101A820JAA
A68A4C3050	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C3052	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C3053	281-0764-00			CAP, FXD, CER DI:82PF, 5%, 100V	04222	MA101A820JAA
A68A4C3054	283-0359-00			CAP, FXD, CER DI:1000PF, 10%, 200V	04222	SR212A102KAA
A68A4C3054	283-0398-00			CAP, FXD, CER DI:680PF, 2%, 100V (OPTION 07 ONLY)	04222	3429100A681G
A68A4C3058	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C3060	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C3064	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C4010	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C4030	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C4031	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C4032	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C4033	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C4034	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C4036	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C4037	283-5003-00			CAP, FXD, CER DI:0.01UF, 10%, 50V	14674	12065C103KAT060R
A68A4C4039	283-5004-00			CAP, FXD, CER DI:0.01UF, 10%, 25V	20932	W1206X104K1802

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A68A4C4050	283-5003-00		CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A68A4C4051	283-5003-00		CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A68A4C4053	283-5003-00		CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A68A4C4055	283-5003-00		CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A68A4C4057	283-5003-00		CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A68A4C4059	283-5003-00		CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A68A4CR1010	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR1011	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR1012	152-5000-00		SEMICON DVC,DI:SW,SI,70V,COM CATHODE	04713	BAV70
A68A4CR1016	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR1018	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR1020	152-5005-00		SEMICON DVC,DI:DUAL,COMMON ANODE,70V,BAW56	04713	MBAW56TI
A68A4CR1030	152-5005-00		SEMICON DVC,DI:DUAL,COMMON ANODE,70V,BAW56	04713	MBAW56TI
A68A4CR1035	152-5005-00		SEMICON DVC,DI:DUAL,COMMON ANODE,70V,BAW56	04713	MBAW56TI
A68A4CR1060	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR1061	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR2010	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR2011	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR2012	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR2013	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR2060	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR2061	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR2062	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR2063	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR3010	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR3011	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR3012	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR3013	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR3060	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR3061	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR3062	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR3063	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR4050	152-5005-00		SEMICON DVC,DI:DUAL,COMMON ANODE,70V,BAW56	04713	MBAW56TI
A68A4CR4055	152-5005-00		SEMICON DVC,DI:DUAL,COMMON ANODE,70V,BAW56	04713	MBAW56TI
A68A4CR4060	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4CR4061	152-5008-00		SEMICON DVC,DI:RECT,SI,400V,1A,SOT-89	80009	152-5008-00
A68A4L1010	108-5024-00		COIL,RF:39UH,10%	54583	NL453232T-390K
A68A4L1012	108-5024-00		COIL,RF:39UH,10%	54583	NL453232T-390K
A68A4L1018	108-5024-00		COIL,RF:39UH,10%	54583	NL453232T-390K
A68A4L1040	108-1363-00		COIL,RF:FXD,2UH,10%	TK1345	108-1363-00
A68A4L1050	108-1363-00		COIL,RF:FXD,2UH,10%	TK1345	108-1363-00
A68A4L1052	108-1363-00		COIL,RF:FXD,2UH,10%	TK1345	108-1363-00
A68A4L1058	108-5024-00		COIL,RF:39UH,10%	54583	NL453232T-390K
A68A4L2010	108-5024-00		COIL,RF:39UH,10%	54583	NL453232T-390K
A68A4L2018	108-5024-00		COIL,RF:39UH,10%	54583	NL453232T-390K
A68A4L2056	108-5024-00		COIL,RF:39UH,10%	54583	NL453232T-390K
A68A4L2058	108-5024-00		COIL,RF:39UH,10%	54583	NL453232T-390K
A68A4L3010	108-5024-00		COIL,RF:39UH,10%	54583	NL453232T-390K
A68A4L3015	108-5024-00		COIL,RF:39UH,10%	54583	NL453232T-390K
A68A4L3029	108-0964-00		COIL,RF:FIXED,1.2 UH	80009	108-0964-00
A68A4L3040	108-0964-00		COIL,RF:FIXED,1.2 UH	80009	108-0964-00
A68A4L3056	108-5024-00		COIL,RF:39UH,10%	54583	NL453232T-390K
A68A4L3058	108-5024-00		COIL,RF:39UH,10%	54583	NL453232T-390K
A68A4L4010	108-5024-00		COIL,RF:39UH,10%	54583	NL453232T-390K
A68A4L4015	108-5024-00		COIL,RF:39UH,10%	54583	NL453232T-390K
A68A4L4040	108-5024-00		COIL,RF:39UH,10%	54583	NL453232T-390K
A68A4L4045	108-5024-00		COIL,RF:39UH,10%	54583	NL453232T-390K
A68A4L4050	108-5024-00		COIL,RF:39UH,10%	54583	NL453232T-390K

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Discnt			
A68A4L4055	108-5024-00			COIL, RF: 39UH, 10%	54583	NL453232T-390K
A68A4L4060	108-5024-00			COIL, RF: 39UH, 10%	54583	NL453232T-390K
A68A4L4061	108-5024-00			COIL, RF: 39UH, 10%	54583	NL453232T-390K
A68A4Q1020	151-5000-00			TRANSISTOR: PNP, SI, SOT-23	80009	151-5000-00
A68A4Q1025	151-5000-00			TRANSISTOR: PNP, SI, SOT-23	80009	151-5000-00
A68A4Q1027	151-5000-00			TRANSISTOR: PNP, SI, SOT-23	80009	151-5000-00
A68A4Q1050	151-5000-00			TRANSISTOR: PNP, SI, SOT-23	80009	151-5000-00
A68A4Q2010	151-5000-00			TRANSISTOR: PNP, SI, SOT-23	80009	151-5000-00
A68A4Q2045	151-5000-00			TRANSISTOR: PNP, SI, SOT-23	80009	151-5000-00
A68A4Q2050	151-5000-00			TRANSISTOR: PNP, SI, SOT-23	80009	151-5000-00
A68A4Q2053	151-5000-00			TRANSISTOR: PNP, SI, SOT-23	80009	151-5000-00
A68A4Q3015	151-5000-00			TRANSISTOR: PNP, SI, SOT-23	80009	151-5000-00
A68A4Q3020	151-5000-00			TRANSISTOR: PNP, SI, SOT-23	80009	151-5000-00
A68A4Q3050	151-5000-00			TRANSISTOR: PNP, SI, SOT-23	80009	151-5000-00
A68A4Q3055	151-5000-00			TRANSISTOR: PNP, SI, SOT-23	80009	151-5000-00
A68A4Q4040	151-5000-00			TRANSISTOR: PNP, SI, SOT-23	80009	151-5000-00
A68A4Q4050	151-5000-00			TRANSISTOR: PNP, SI, SOT-23	80009	151-5000-00
A68A4R700	315-0822-00			RES, FXD, FILM: 8.2K OHM, 5%, 0.25W (OPTION 07 ONLY)	19701	5043CX8K200J
A68A4R701	315-0822-00			RES, FXD, FILM: 8.2K OHM, 5%, 0.25W (OPTION 07 ONLY)	19701	5043CX8K200J
A68A4R1010	321-5011-00			RES, FXD, FILM: 274 OHM, 1%, 0.125W	01121	BCK2740FT
A68A4R1012	321-5007-00			RES, FXD, FILM: 121 OHM, 1%, 0.125W	01121	BCK1210FT
A68A4R1014	321-5043-00			RES, FXD, FILM: 47.5 OHM, 1%, 0.125W	57668	MCR18FWEA47E5
A68A4R1015	321-5007-00			RES, FXD, FILM: 121 OHM, 1%, 0.125W	01121	BCK1210FT
A68A4R1016	321-5007-00			RES, FXD, FILM: 121 OHM, 1%, 0.125W	01121	BCK1210FT
A68A4R1018	321-5021-00			RES, FXD, FILM: 1.82K, 1%, 0.125W	01121	BCK1821FT
A68A4R1019	321-5020-00			RES, FXD, FILM: 1.50K, 1%, 0.125W	01121	BCK1501FT
A68A4R1020	321-5020-00			RES, FXD, FILM: 1.50K, 1%, 0.125W	01121	BCK1501FT
A68A4R1021	321-5021-00			RES, FXD, FILM: 1.82K, 1%, 0.125W	01121	BCK1821FT
A68A4R1022	321-5021-00			RES, FXD, FILM: 1.82K, 1%, 0.125W	01121	BCK1821FT
A68A4R1023	321-5020-00			RES, FXD, FILM: 1.50K, 1%, 0.125W	01121	BCK1501FT
A68A4R1024	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A68A4R1025	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A68A4R1026	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A68A4R1027	311-0622-00			RES, VAR, NONNW: TRMR, 100 OHM, 0.5W	32997	3329H-L58-101
A68A4R1029	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A68A4R1030	321-5011-00			RES, FXD, FILM: 274 OHM, 1%, 0.125W	01121	BCK2740FT
A68A4R1031	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A68A4R1032	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A68A4R1050	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A68A4R1051	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A68A4R1053	321-5021-00			RES, FXD, FILM: 1.82K, 1%, 0.125W	01121	BCK1821FT
A68A4R1055	321-5020-00			RES, FXD, FILM: 1.50K, 1%, 0.125W	01121	BCK1501FT
A68A4R1057	321-5007-00			RES, FXD, FILM: 121 OHM, 1%, 0.125W	01121	BCK1210FT
A68A4R2010	321-5012-00			RES, FXD, FILM: 332 OHM, 1%, 0.125W	01121	BCK3320FT
A68A4R2011	321-5003-00			RES, FXD, FILM: 18.2 OHM, 1%, 0.125W	57668	MCR18EZHFV 18E2
A68A4R2012	321-5012-00			RES, FXD, FILM: 332 OHM, 1%, 0.125W	01121	BCK3320FT
A68A4R2014	321-5007-00			RES, FXD, FILM: 121 OHM, 1%, 0.125W	01121	BCK1210FT
A68A4R2015	321-5006-00			RES, FXD, FILM: 100 OHM, 1%, 0.125W	01121	BCK1000FT
A68A4R2016	321-5044-00			RES, FXD, FILM: 56.2 OHM, 1%, 0.125W	01121	BCD56R2FT
A68A4R2017	321-5006-00			RES, FXD, FILM: 100 OHM, 1%, 0.125W	01121	BCK1000FT
A68A4R2018	321-5007-00			RES, FXD, FILM: 121 OHM, 1%, 0.125W	01121	BCK1210FT
A68A4R2020	321-5021-00			RES, FXD, FILM: 1.82K, 1%, 0.125W	01121	BCK1821FT
A68A4R2021	321-5020-00			RES, FXD, FILM: 1.50K, 1%, 0.125W	01121	BCK1501FT
A68A4R2023	321-5021-00			RES, FXD, FILM: 1.82K, 1%, 0.125W	01121	BCK1821FT
A68A4R2024	321-5020-00			RES, FXD, FILM: 1.50K, 1%, 0.125W	01121	BCK1501FT
A68A4R2026	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A68A4R2027	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A68A4R2028	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A68A4R2029	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A68A4R2050	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A68A4R2051	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A68A4R2052	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A68A4R2053	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A68A4R2054	321-5020-00		RES,FXD,FILM:1.50K,1%,0.125W	01121	BCK1501FT
A68A4R2055	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A68A4R2056	321-5007-00		RES,FXD,FILM:121 OHM,1%,0.125W	01121	BCK1210FT
A68A4R2057	321-5020-00		RES,FXD,FILM:1.50K,1%,0.125W	01121	BCK1501FT
A68A4R2058	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A68A4R2059	321-5007-00		RES,FXD,FILM:121 OHM,1%,0.125W	01121	BCK1210FT
A68A4R3010	321-5008-00		RES,FXD,FILM:150 OHM,1%,0.125W	01121	BCK1500FT
A68A4R3011	321-5050-00		RES,FXD,FILM:33.2 OHM,1%,0.125W	57668	MCR18FWEA33E2
A68A4R3012	321-5008-00		RES,FXD,FILM:150 OHM,1%,0.125W	01121	BCK1500FT
A68A4R3013	321-5020-00		RES,FXD,FILM:1.50K,1%,0.125W	01121	BCK1501FT
A68A4R3014	321-5007-00		RES,FXD,FILM:121 OHM,1%,0.125W	01121	BCK1210FT
A68A4R3015	321-5007-00		RES,FXD,FILM:121 OHM,1%,0.125W	01121	BCK1210FT
A68A4R3016	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A68A4R3017	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A68A4R3018	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A68A4R3019	321-5020-00		RES,FXD,FILM:1.50K,1%,0.125W	01121	BCK1501FT
A68A4R3020	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A68A4R3022	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A68A4R3024	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A68A4R3049	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A68A4R3050	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A68A4R3051	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A68A4R3052	321-5007-00		RES,FXD,FILM:121 OHM,1%,0.125W	01121	BCK1210FT
A68A4R3053	321-5020-00		RES,FXD,FILM:1.50K,1%,0.125W	01121	BCK1501FT
A68A4R3054	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A68A4R3055	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A68A4R3056	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A68A4R3057	321-5020-00		RES,FXD,FILM:1.50K,1%,0.125W	01121	BCK1501FT
A68A4R3059	321-5007-00		RES,FXD,FILM:121 OHM,1%,0.125W	01121	BCK1210FT
A68A4R4010	321-5012-00		RES,FXD,FILM:332 OHM,1%,0.125W	01121	BCK3320FT
A68A4R4012	321-5012-00		RES,FXD,FILM:332 OHM,1%,0.125W	01121	BCK3320FT
A68A4R4030	321-5020-00		RES,FXD,FILM:1.50K,1%,0.125W	01121	BCK1501FT
A68A4R4032	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A68A4R4048	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A68A4R4050	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A68A4R4051	321-5007-00		RES,FXD,FILM:121 OHM,1%,0.125W	01121	BCK1210FT
A68A4R4052	321-5020-00		RES,FXD,FILM:1.50K,1%,0.125W	01121	BCK1501FT
A68A4R4053	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A68A4R4054	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A68A4R4056	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A68A4R4057	321-5007-00		RES,FXD,FILM:121 OHM,1%,0.125W	01121	BCK1210FT
A68A4R4058	321-5020-00		RES,FXD,FILM:1.50K,1%,0.125W	01121	BCK1501FT
A68A4R4059	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A68A4R4060	321-5012-00		RES,FXD,FILM:332 OHM,1%,0.125W	01121	BCK3320FT
A68A4R4062	321-5012-00		RES,FXD,FILM:332 OHM,1%,0.125W	01121	BCK3320FT
A68A4S2030	260-2031-00		SWITCH,ROCKER:(7)SPST,30VDC,125MA	81073	76SB07S
A68A4T2025	120-1637-00		TRANSFORMER,RF:TOROID	TK1345	120-1637-00
A68A4T2035	120-1237-00		TRANSFORMER,RF:TOROID	80009	120-1237-00
A68A4T2040	120-1237-00		TRANSFORMER,RF:TOROID	80009	120-1237-00
A68A4T3040	120-1637-00		TRANSFORMER,RF:TOROID	TK1345	120-1637-00
A68A4TP1051	214-0579-00		TERM,TEST POINT:BR5 CD PL	80009	214-0579-00

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A68A4TP4020	214-0579-00		TERM,TEST POINT:BRS CD PL	80009	214-0579-00
A68A4U4035	156-5049-00		MICROCKT ,DGTL:LS TTL, DRIVER/DECODER,BCD TO D ECIMAL	80009	156-5049-00
A68A5	670-8321-00		CIRCUIT BD ASSY:10DB GAIN STEPS	80009	670-8321-00
A68A5C1017	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C1024	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C1028	283-0107-00		CAP,FXD,CER DI:51PF,5%,200V	04222	SR206A510JAA
A68A5C1039	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C1047	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C1057	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A5C1066	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C2013	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C2018	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C2020	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A5C2032	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A5C2046	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A5C2052	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A5C2055	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C2059	283-0107-00		CAP,FXD,CER DI:51PF,5%,200V	04222	SR206A510JAA
A68A5C3042	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C3045	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A5C3046	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C4024	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C4028	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C4046	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C4054	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C4059	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5C4064	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A5CR1053	152-0524-00		SEMICOND DVC,DI:SW,SI,100V,0.1A,DO-35	28480	5082-1779
A68A5Q1036	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A68A5Q2015	151-0301-00		TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A68A5Q2027	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A68A5Q2043	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A68A5Q2056	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A68A5Q3016	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A68A5Q3055	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A68A5Q3064	151-0650-00		TRANSISTOR:NPN,SI,TO-39	50545	2SC1252
A68A5Q4039	151-0301-00		TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A68A5R1016	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A68A5R1022	315-0151-00		RES,FXD,FILM:150 OHM,5%,0.25W	57668	NTR25J-E150E
A68A5R1026	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A68A5R1031	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A68A5R1032	315-0390-00		RES,FXD,FILM:39 OHM,5%,0.25W	57668	NTR25J-E39E0
A68A5R1041	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A68A5R1046	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A68A5R1050	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A68A5R1052	321-0239-00		RES,FXD,FILM:3.01K OHM,1%,0.125W,TC=TO	19701	5043ED3K010F
A68A5R1056	321-0058-00		RES,FXD,FILM:39.2 OHM,0.5%,0.125W,TC=TO	91637	CMF55116G39R20F
A68A5R1060	321-0194-00		RES,FXD,FILM:1.02K OHM,1%,0.125W,TC=TO	07716	CEAD10200F
A68A5R1062	321-0164-00		RES,FXD,FILM:499 OHM,1%,0.125W,TC=TO	19701	5033ED499ROF
A68A5R1064	321-0065-00		RES,FXD,FILM:46.4 OHM,1%,0.125W,TC=TO	57668	RB14FXE 46E4
A68A5R2011	315-0472-00		RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A68A5R2012	315-0472-00		RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A68A5R2018	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A68A5R2023	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A68A5R2025	311-0635-00		RES,VAR,NONWM:TRMR,1K OHM,0.5W	32997	3329H-L58-102
A68A5R2031	321-0194-00		RES,FXD,FILM:1.02K OHM,1%,0.125W,TC=TO	07716	CEAD10200F
A68A5R2034	321-0164-00		RES,FXD,FILM:499 OHM,1%,0.125W,TC=TO	19701	5033ED499ROF



Component No.	Tektronix		Name & Description	Mfr. Code	Mfr. Part No.
	Part No.	Serial/Assembly No. Effective Dscnt			
A68A5R2035	321-0065-00		RES,FXD,FILM:46.4 OHM,1%,0.125W,TC=TO	57668	RB14FXE 46E4
A68A5R2039	321-0130-00		RES,FXD,FILM:221 OHM,1%,0.125W,TC=TO	19701	5043ED221ROF
A68A5R2042	315-0390-00		RES,FXD,FILM:39 OHM,5%,0.25W	57668	NTR25J-E39E0
A68A5R2048	321-0097-00		RES,FXD,FILM:100 OHM,1%,0.125W,TC=TO	91637	CMF55116G100ROF
A68A5R2051	315-0152-00		RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A68A5R2053	315-0152-00		RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A68A5R2057	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A68A5R2063	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A68A5R2069	301-0201-00		RES,FXD,FILM:200 OHM,5%,0.5W	19701	5053CX200ROJ
A68A5R3014	315-0472-00		RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A68A5R3015	315-0390-00		RES,FXD,FILM:39 OHM,5%,0.25W	57668	NTR25J-E39E0
A68A5R3022	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A68A5R3026	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A68A5R3029	321-0032-00		RES,FXD,FILM:21.0 OHM,1%,0.125W,TC=TO	57668	RB14FXE 21E0
A68A5R3035	311-0622-00		RES,VAR,NONWV:TRMR,100 OHM,0.5W	32997	3329H-L58-101
A68A5R3038	321-0026-00		RES,FXD,FILM:18.2 OHM,1%,0.125W,TC=TO	57668	RB14FXE 18E2
A68A5R3039	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A68A5R3044	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A68A5R3048	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A68A5R3050	321-0143-00		RES,FXD,FILM:301 OHM,1%,0.125W,TC=TO	07716	CEAD301ROF
A68A5R3052	315-0390-00		RES,FXD,FILM:39 OHM,5%,0.25W	57668	NTR25J-E39E0
A68A5R3059	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A68A5R4013	321-0160-00		RES,FXD,FILM:453 OHM,1%,0.125W,MI	19701	5033ED453ROF
A68A5R4026	315-0151-00		RES,FXD,FILM:150 OHM,5%,0.25W	57668	NTR25J-E150E
A68A5R4030	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A68A5R4033	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A68A5R4035	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A68A5R4045	321-0111-00		RES,FXD,FILM:140 OHM,1%,0.125W,TC=TO	07716	CEAD140ROF
A68A5R4049	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A68A5R4052	315-0181-00		RES,FXD,FILM:180 OHM,5%,0.25W	57668	NTR25J-E180E
A68A5R4061	315-0220-00		RES,FXD,FILM:22 OHM,5%,0.25W	19701	5043CX22R00J
A68A5R4066	315-0220-00		RES,FXD,FILM:22 OHM,5%,0.25W	19701	5043CX22R00J
A68A5T4019	120-1431-00		TRANSFORMER,RF:TOROID 2 WINDING ON FORM	80009	120-1431-00
A68A6	670-5532-04		CIRCUIT BD ASSY:20DB GAIN STEPS	80009	670-5532-04
A68A6C1018	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C1019	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C1022	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C1026	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C1031	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C1041	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A6C1042	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C1045	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A6C2023	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C2032	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C2042	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C2051	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C2053	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C2059	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C2061	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6C2069	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A6Q1025	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A68A6Q1035	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A68A6Q1043	151-0302-00		TRANSISTOR:NPN,SI,TO-18	04713	ST899
A68A6Q1062	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A68A6Q2018	151-0301-00		TRANSISTOR:PNP,SI,TO-18	80009	151-0301-00
A68A6Q2042	151-0301-00		TRANSISTOR:PNP,SI,TO-18	30009	151-0301-00
A68A6R1015	321-0175-00		RES,FXD,FILM:649 OHM,1%,0.125W,TC=TO	19701	5043ED649ROF
A68A6R1019	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A68A6R1024	321-0130-00		RES,FXD,FILM:221 OHM,1%,0.125W,TC=TO	19701	5043ED221ROF
A68A6R1025	317-0331-00		RES,FXD,CMPNS:330 OHM,5%,0.125W	01121	BB3315
A68A6R1026	321-0114-00		RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150ROF
A68A6R1032	321-0026-00		RES,FXD,FILM:18.2 OHM,1%,0.125W,TC=TO	57668	RB14FXE 18E2
A68A6R1037	321-0143-00		RES,FXD,FILM:301 OHM,1%,0.125W,TC=TO	07716	CEAD301ROF
A68A6R1038	317-0222-00		RES,FXD,CMPNS:2.2K OHM,5%,0.125W	01121	BB2225
A68A6R1041	317-0331-00		RES,FXD,CMPNS:330 OHM,5%,0.125W	01121	BB3315
A68A6R1042	321-0130-00		RES,FXD,FILM:221 OHM,1%,0.125W,TC=TO	19701	5043ED221ROF
A68A6R1045	317-0331-00		RES,FXD,CMPNS:330 OHM,5%,0.125W	01121	BB3315
A68A6R1049	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A68A6R1056	317-0104-00		RES,FXD,CMPNS:100K OHM,5%,0.125W	01121	BB1045
A68A6R1064	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A68A6R1065	317-0222-00		RES,FXD,CMPNS:2.2K OHM,5%,0.125W	01121	BB2225
A68A6R2014	315-0122-00		RES,FXD,FILM:1.2K OHM,5%,0.25W	57668	NTR25J-E01K2
A68A6R2019	317-0222-00		RES,FXD,CMPNS:2.2K OHM,5%,0.125W	01121	BB2225
A68A6R2021	317-0104-00		RES,FXD,CMPNS:100K OHM,5%,0.125W	01121	BB1045
A68A6R2022	317-0222-00		RES,FXD,CMPNS:2.2K OHM,5%,0.125W	01121	BB2225
A68A6R2023	311-0622-00		RES,VAR,NONNW:TRMR,100 OHM,0.5W	32997	3329H-L58-101
A68A6R2026	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A68A6R2031	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A68A6R2039	317-0222-00		RES,FXD,CMPNS:2.2K OHM,5%,0.125W	01121	BB2225
A68A6R2044	321-0114-00		RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150ROF
A68A6R2045	321-0085-00		RES,FXD,FILM:75 OHM,1%,0.125W,TC=TO	57668	CRB14FXE 75 OHM
A68A6R2046	317-0104-00		RES,FXD,CMPNS:100K OHM,5%,0.125W	01121	BB1045
A68A6R2051	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A68A6R2052	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A68A6R2060	311-0622-00		RES,VAR,NONNW:TRMR,100 OHM,0.5W	32997	3329H-L58-101
A68A6R2061	321-0097-00		RES,FXD,FILM:100 OHM,1%,0.125W,TC=TO	91637	CMF55116G100ROF
A68A6R2062	321-0026-00		RES,FXD,FILM:18.2 OHM,1%,0.125W,TC=TO	57668	RB14FXE 18E2
A68A6R2063	317-0222-00		RES,FXD,CMPNS:2.2K OHM,5%,0.125W	01121	BB2225
A68A7	670-5533-03		CIRCUIT BD ASSY:BAND LEVELING	80009	670-5533-03
A68A7C1017	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C1021	283-0107-00		CAP,FXD,CER DI:51PF,5%,200V	04222	SR206A510JAA
A68A7C1025	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C1032	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C1035	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C1039	283-0107-00		CAP,FXD,CER DI:51PF,5%,200V	04222	SR206A510JAA
A68A7C1044	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C2015	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C2018	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C2023	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C2028	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A7C2029	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C2033	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C2034	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C2042	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7C2043	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A7C2046	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A7CR2021	152-0524-00		SEMICONDC DVC,DI:SW,SI,100V,0.1A,DO-35	28480	5082-1779
A68A7Q1025	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A68A7Q1031	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A68A7Q1033	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A68A7Q1041	151-0650-00		TRANSISTOR:NPN,SI,TO-39	50545	25C1252
A68A7Q2015	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A68A7Q2019	151-0282-00		TRANSISTOR:NPN,SI,TO-72	04713	SRF2625
A68A7Q2046	151-0301-00		TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A68A7R1013	321-0130-00		RES,FXD,FILM:221 OHM,1%,0.125W,TC=TO	19701	5043ED221ROF
A68A7R1014	317-0390-00		RES,FXD,CMPNS:39 OHM,5%,0.125W	01121	BB3905

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A68A7R1015	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A68A7R1016	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A68A7R1017	315-0390-00		RES,FXD,FILM:39 OHM,5%,0.25W	57668	NTR25J-E39E0
A68A7R1019	315-0390-00		RES,FXD,FILM:39 OHM,5%,0.25W	57668	NTR25J-E39E0
A68A7R1024	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A68A7R1025	321-0164-00		RES,FXD,FILM:499 OHM,1%,0.125W,TC=TO	19701	5033ED499ROF
A68A7R1026	321-0194-00		RES,FXD,FILM:1.02K OHM,1%,0.125W,TC=TO	07716	CEAD10200F
A68A7R1027	321-0065-00		RES,FXD,FILM:46.4 OHM,1%,0.125W,TC=TO	57668	RB14FXE 46E4
A68A7R1028	315-0471-00		RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A68A7R1029	317-0390-00		RES,FXD,CMPSN:39 OHM,5%,0.125W	01121	BB3905
A68A7R1031	321-0130-00		RES,FXD,FILM:221 OHM,1%,0.125W,TC=TO	19701	5043ED221ROF
A68A7R1033	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A68A7R1035	315-0681-00		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A68A7R1036	315-0220-00		RES,FXD,FILM:22 OHM,5%,0.25W	19701	5043CX22R00J
A68A7R1037	315-0220-00		RES,FXD,FILM:22 OHM,5%,0.25W	19701	5043CX22R00J
A68A7R1038	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A68A7R1044	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A68A7R1046	321-0065-00		RES,FXD,FILM:46.4 OHM,1%,0.125W,TC=TO	57668	RB14FXE 46E4
A68A7R1047	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A68A7R1048	321-0164-00		RES,FXD,FILM:499 OHM,1%,0.125W,TC=TO	19701	5033ED499ROF
A68A7R2017	315-0152-00		RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A68A7R2018	315-0152-00		RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A68A7R2021	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A68A7R2024	321-0041-00		RES,FXD,FILM:26.1 OHM,1%,0.125W,TC=TO	91637	CMF55116G26R10F
A68A7R2025	321-0234-00		RES,FXD,FILM:2.67K OHM,1%,0.125W,TC=TO	19701	5033ED2K67F
A68A7R2026	317-0470-00		RES,FXD,CMPSN:47 OHM,5%,0.125W	01121	BB4705
A68A7R2028	317-0470-00		RES,FXD,CMPSN:47 OHM,5%,0.125W	01121	BB4705
A68A7R2031	315-0470-00		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A68A7R2033	315-0152-00		RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A68A7R2034	315-0152-00		RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A68A7R2036	321-0151-00		RES,FXD,FILM:365 OHM,1%,0.125W,TC=TO	07716	CEAD365R0F
A68A7R2037	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A68A7R2038	315-0821-00		RES,FXD,FILM:820 OHM,5%,0.25W	19701	5043CX82R0R0J
A68A7R2041	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A68A7R2042	321-0051-00		RES,FXD,FILM:33.2 OHM,1%,0.125W,TC=TO	91637	CMF5511GG33R20F
A68A7R2043	315-0471-00		RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A68A7R2045	315-0471-00		RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A68A7R2046	317-0103-00		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A68A7T2013	120-0902-00		XFMR,TOROID:	80009	120-0902-00
A68A8	671-0094-01		CIRCUIT BD ASSY:2ND FILTER SELECT	80009	671-0094-01
A68A8	670-9598-01		CIRCUIT BD ASSY:2ND FILTER SELECT (OPTION 07 ONLY)	80009	670-9598-01
A68A8C1015	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SRI55E103MAA
A68A8C1027	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SRI55E103MAA
A68A8C1035	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SRI55E103MAA
A68A8C1041	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SRI55E103MAA
A68A8C1047	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SRI55E103MAA
A68A8C1060	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SRI55E103MAA
A68A8C1061	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SRI55E103MAA
A68A8C2016	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SRI55E103MAA
A68A8C2018	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SRI55E103MAA
A68A8C2019	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SRI55E103MAA
A68A8C2028	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SRI55E103MAA
A68A8C2030	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SRI55E103MAA
A68A8C2033	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SRI55E103MAA
A68A8C2041	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SRI55E103MAA
A68A8C2049	283-0359-00		CAP,FXD,CER DI:1000PF,10%,200V	04222	SR212A102KAA
A68A8C2054	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SRI55E103MAA

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A68A8C2058	281-0816-00		CAP,FXD,CER DI:82 PF,5%,100V	04222	MA106A820JAA
A68A8C2065	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C2066	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C2070	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A8C3013	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A8C3026	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C3041	281-0153-00		CAP,VAR,AIR DI:1.7-10PF,250V	74970	187-0106-055
A68A8C3046	281-0811-00		CAP,FXD,CER DI:10PF,10%,100V	04222	MA101A100KAA
A68A8C3047	283-0838-00		CAP,FXD,CER DI:18PF,5%,50V	80009	283-0838-00
A68A8C3049	281-0816-00		CAP,FXD,CER DI:82 PF,5%,100V	04222	MA106A820JAA
A68A8C3066	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C3067	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C4046	283-0159-00		CAP,FXD,CER DI:18PF,5%,50V	04222	SR155A180JAA
A68A8C4048	281-0810-00		CAP,FXD,CER DI:5.6PF,+/-0.5PF,100V	04222	MA101A5R6DAA
A68A8C4048	283-0168-00		CAP,FXD,CER DI:12PF,5%,100V (OPTION 07 ONLY)	04222	SR151A120JAA
A68A8C4053	281-0810-00		CAP,FXD,CER DI:5.6PF,+/-0.5PF,100V	04222	MA101A5R6DAA
A68A8C4054	281-0810-00		CAP,FXD,CER DI:5.6PF,+/-0.5PF,100V	04222	MA101A5R6DAA
A68A8C4056	281-0810-00		CAP,FXD,CER DI:5.6PF,+/-0.5PF,100V	04222	MA101A5R6DAA
A68A8C4065	281-0811-00		CAP,FXD,CER DI:10PF,10%,100V	04222	MA101A100KAA
A68A8C4066	283-0159-00		CAP,FXD,CER DI:18PF,5%,50V	04222	SR155A180JAA
A68A8C4068	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A8C4069	283-0838-00		CAP,FXD,CER DI:18PF,5%,50V	80009	283-0838-00
A68A8C5048	281-0153-00		CAP,VAR,AIR DI:1.7-10PF,250V	74970	187-0106-055
A68A8C5051	281-0810-00		CAP,FXD,CER DI:5.6PF,+/-0.5PF,100V	04222	MA101A5R6DAA
A68A8C5051	283-0168-00		CAP,FXD,CER DI:12PF,5%,100V (OPTION 07 ONLY)	04222	SR151A120JAA
A68A8C5055	281-0153-00		CAP,VAR,AIR DI:1.7-10PF,250V	74970	187-0106-055
A68A8C5057	281-0816-00		CAP,FXD,CER DI:82 PF,5%,100V	04222	MA106A820JAA
A68A8C5064	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C5065	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C5073	281-0816-00		CAP,FXD,CER DI:82 PF,5%,100V	04222	MA106A820JAA
A68A8C6041	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A8C6056	283-0359-00		CAP,FXD,CER DI:1000PF,10%,200V	04222	SR212A102KAA
A68A8C6072	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C6073	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C7059	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C7061	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C8013	283-0111-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	SR305C104MAA
A68A8C8024	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C8025	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C8029	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C8040	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C8045	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C8046	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C8057	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C8061	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8C8075	283-0204-00		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A68A8CR1017	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A68A8CR1019	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A68A8CR1020	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A68A8CR1022	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A68A8CR1025	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A68A8CR1029	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A68A8CR1038	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A68A8CR1040	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A68A8CR1050	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A68A8CR1052	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A68A8CR3068	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A68A8CR7065	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A68A8CR7070	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A68A8CR7071	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A68A8CR7076	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A68A8CR8015	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A68A8CR8016	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A68A8CR8035	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A68A8CR8036	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A68A8CR8059	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A68A8CR8060	152-0107-00		SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A68A8L1019	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L1025	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L1032	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L1045	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L1055	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L2013	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L2059	108-0964-00		COIL,RF:FIXED,1.2 UH	80009	108-0964-00
A68A8L2075	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L5065	108-0964-00		COIL,RF:FIXED,1.2 UH	80009	108-0964-00
A68A8L6056	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L7075	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L8020	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L8040	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L8061	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8L8070	108-0395-00		COIL,RF:FIXED,64UH	80009	108-0395-00
A68A8Q2020	151-0301-00		TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A68A8Q2028	151-0301-00		TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A68A8Q2035	151-0301-00		TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A68A8Q2040	151-0301-00		TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A68A8Q2055	151-0301-00		TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A68A8Q6065	151-0301-00		TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A68A8Q6075	151-0301-00		TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A68A8Q7060	151-0301-00		TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A68A8Q8035	151-0301-00		TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A68A8Q8050	151-0301-00		TRANSISTOR:PMP,SI,TO-18	80009	151-0301-00
A68A8R700	315-0822-00		RES,FXD,FILM:8.2K OHM,5%,0.25W (OPTION 07 ONLY)	19701	5043CX8K200J
A68A8R701	315-0822-00		RES,FXD,FILM:8.2K OHM,5%,0.25W (OPTION 07 ONLY)	19701	5043CX8K200J
A68A8R1033	315-0121-00		RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R1035	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A8R1050	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A8R1055	315-0121-00		RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R1062	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R1064	321-0713-00		RES,FXD,FILM:30 OHM,1%,0.125W,TC=T0	57668	CRB14 FXE 30 OHM
A68A8R1065	311-0622-00		RES,VAR,NONWV:TRMR,100 OHM,0.5W	32997	3329H-L58-101
A68A8R1066	321-0032-00		RES,FXD,FILM:21.0 OHM,1%,0.125W,TC=T0	57668	RB14FXE 21E0
A68A8R2014	315-0331-00		RES,FXD,FILM:330 OHM,5%,0.25W	57668	NTR25J-E330E
A68A8R2015	315-0331-00		RES,FXD,FILM:330 OHM,5%,0.25W	57668	NTR25J-E330E
A68A8R2016	315-0121-00		RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R2020	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A8R2025	315-0121-00		RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R2026	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A8R2030	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R2034	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R2037	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R2040	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A68A8R2043	315-0121-00		RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R2044	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R2045	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R2047	321-0054-00		RES,FXD,FILM:35.7 OHM,0.5%,0.125W,TC=TO MI	91637	CMF55116G35R70F
A68A8R2048	321-0114-00		RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150R0F
A68A8R2049	321-0114-00		RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150R0F
A68A8R2059	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R2067	321-0114-00		RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150R0F
A68A8R3014	321-0054-00		RES,FXD,FILM:35.7 OHM,0.5%,0.125W,TC=TO MI	91637	CMF55116G35R70F
A68A8R3015	311-0622-00		RES,VAR,NONWV:TRMR,100 OHM,0.5W	32997	3329H-L58-101
A68A8R3019	321-0032-00		RES,FXD,FILM:21.0 OHM,1%,0.125W,TC=TO	57668	RB14FXE 21E0
A68A8R3022	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R3024	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R3028	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R3029	311-0622-00		RES,VAR,NONWV:TRMR,100 OHM,0.5W	32997	3329H-L58-101
A68A8R3033	311-0622-00		RES,VAR,NONWV:TRMR,100 OHM,0.5W	32997	3329H-L58-101
A68A8R3035	321-0713-00		RES,FXD,FILM:30 OHM,1%,0.125W,TC=TO	57668	CRB14 FXE 30 OHM
A68A8R3036	321-0114-00		RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150R0F
A68A8R3037	321-0032-00		RES,FXD,FILM:21.0 OHM,1%,0.125W,TC=TO	57668	RB14FXE 21E0
A68A8R4019	321-0114-00		RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150R0F
A68A8R4025	311-0633-00		RES,VAR,NONWV:TRMR,5K OHM,0.5W	32997	3329H-L58-502
A68A8R4026	321-0001-00		RES,FXD,FILM:10 OHM,1%,0.125W,TC=TO	19701	5033RD10R00FMS
A68A8R4029	321-0178-00		RES,FXD,FILM:698 OHM,1%,0.125W,TC=TO	07716	CEAD698R0F
A68A8R4030	321-0713-00		RES,FXD,FILM:30 OHM,1%,0.125W,TC=TO	57668	CRB14 FXE 30 OHM
A68A8R4033	321-0032-00		RES,FXD,FILM:21.0 OHM,1%,0.125W,TC=TO	57668	RB14FXE 21E0
A68A8R4034	321-0114-00		RES,FXD,FILM:150 OHM,1%,0.125 W,TC=TO	19701	5033ED150R0F
A68A8R5074	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R5075	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R6040	321-0097-00		RES,FXD,FILM:100 OHM,1%,0.125W,TC=TO	91637	CMF55116G100R0F
A68A8R6060	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A8R6061	315-0121-00		RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R6065	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R6066	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R6070	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A8R6075	315-0121-00		RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R7060	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A8R7061	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R7062	315-0121-00		RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R7063	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R8010	307-0106-00		RES,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB 47G5
A68A8R8026	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A8R8027	315-0121-00		RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R8030	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R8035	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R8047	315-0121-00		RES,FXD,FILM:120 OHM,5%,0.25W	19701	5043CX120R0J
A68A8R8048	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A68A8R8050	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R8055	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A68A8R8070	304-0681-00		RES,FXD,CMPSN:680 OHM,10%,1W	01121	GB6811
A68A8S4050	250-2031-00		SWITCH,ROCKER:(7)SPST,30VDC,125MA	81073	76S8075
A68A8T4040	120-1237-00		TRANSFORMER,RF:TOROID	80009	120-1237-00
A68A8T5047	120-1338-00		TRANSFORMER,RF:TOROID	80009	120-1338-00
A68A8T7042	120-1237-00		TRANSFORMER,RF:TOROID	80009	120-1237-00
A68A8T7050	120-1338-00		TRANSFORMER,RF:TOROID	80009	120-1338-00
A68A8U3070	156-1235-00		MICROCKT,DGTL:LSTTL,BCD TO DEC DECODER/DR	01295	SN74LS145N3
A68A8W3013	131-0566-00		BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A68A9	670-9778-00		CIRCUIT BD ASSY:POST VR AMPLIFIER	80009	670-9778-00
A68A9C1010	283-5025-00		CAP,FXD,CER DI:220PF,5%,50V	54583	C3216C061H221J-T

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Dscnt			
A68A9C1011	283-5027-00			CAP,FXD,CER DI:470PF,5%,50V	54583	C3216COG1H471J-T
A68A9C1012	283-5027-00			CAP,FXD,CER DI:470PF,5%,50V	54583	C3216COG1H471J-T
A68A9C1020	283-5027-00			CAP,FXD,CER DI:470PF,5%,50V	54583	C3216COG1H471J-T
A68A9C1021	283-5025-00			CAP,FXD,CER DI:220PF,5%,50V	54583	C3216COG1H221J-T
A68A9C1022	283-5026-00			CAP,FXD,CER DI:390PF,5%,50V	54583	C3216COG1H391J-T
A68A9C1023	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A68A9C1024	283-5025-00			CAP,FXD,CER DI:220PF,5%,50V	54583	C3216COG1H221J-T
A68A9C1030	283-5026-00			CAP,FXD,CER DI:390PF,5%,50V	54583	C3216COG1H391J-T
A68A9C1031	283-5025-00			CAP,FXD,CER DI:220PF,5%,50V	54583	C3216COG1H221J-T
A68A9C1032	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A68A9C1033	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A68A9C1034	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A68A9C1040	283-5003-00			CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A68A9C1041	283-5004-00			CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A68A9L1010	108-1367-00			COIL,RF:FXD,870NH,5%	TK1345	108-1367-00
A68A9L1012	108-1366-00			COIL,RF:FXD,1.047NH,5%	TK1345	108-1366-00
A68A9L1020	108-1366-00			COIL,RF:FXD,1.047NH,5%	TK1345	108-1366-00
A68A9L1021	108-1367-00			COIL,RF:FXD,870NH,5%	TK1345	108-1367-00
A68A9L1022	108-1368-00			COIL,RF:FXD,540NH,5%	TK1345	108-1368-00
A68A9L1023	108-1369-00			COIL,RF:FXD,465NH,5%	TK1345	108-1369-00
A68A9L1030	108-1368-00			COIL,RF:FXD,540NH,5%	TK1345	108-1368-00
A68A9Q1030	151-0446-00			TRANSISTOR:NPN,SI,TO-39	04713	SRF2320
A68A9Q1040	151-0411-00			TRANSISTOR:NPN,SI,TO-39	04713	SRF709
A68A9R1020	321-5015-00			RES,FXD,FILM:562 OHM,1%,0.125W	01121	BCK5620FT
A68A9R1030	311-0622-00			RES,VAR,NONWV:TRMR,100 OHM,0.5W	32997	3329H-L58-101
A68A9R1031	321-5046-00			RES,FXD,FILM:82.5 OHM,1%,0.125W	01121	BCK82R5FT
A68A9R1032	321-5006-00			RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A68A9R1033	321-5006-00			RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A68A9R1034	321-5004-00			RES,FXD,FILM:22.1 OHM,1%,0.125W	57668	MCR18FWEA22E1
A68A9R1035	321-5008-00			RES,FXD,FILM:150 OHM,1%,0.125W	01121	BCK1500FT
A68A9R1036	321-5004-00			RES,FXD,FILM:22.1 OHM,1%,0.125W	57668	MCR18FWEA22E1
A68A9R1037	321-5012-00			RES,FXD,FILM:332 OHM,1%,0.125W	01121	BCK3320FT
A68A9R1038	321-5012-00			RES,FXD,FILM:332 OHM,1%,0.125W	01121	BCK3320FT
A68A9R1040	321-5010-00			RES,FXD,FILM:221 OHM,1%,0.125W	01121	BCK221FT
A68A9R1041	321-5015-00			RES,FXD,FILM:562 OHM,1%,0.125W	01121	BCK5620FT
A68A9R1042	321-0001-00			RES,FXD,FILM:10 OHM,1%,0.125W,TC=TO	19701	5033RD10R00FMS
A68A9R1043	321-5010-00			RES,FXD,FILM:221 OHM,1%,0.125W	01121	BCK221FT
A68A9T1020	120-0459-00			XFMR,TOROID:	80009	120-0459-00
A68A9T1040	120-1237-00			TRANSFORMER,RF:TOROID	80009	120-1237-00
A68A9T1041	120-0902-00			XFMR,TOROID:	80009	120-0902-00
A70	670-9932-01			CIRCUIT BD ASSY:Z-AXIS	80009	670-9932-01
A70C1026	283-0068-00			CAP,FXD,CER DI:0.01UF,+100-0%,500V	59660	871-533E103P
A70C1063	283-0068-00			CAP,FXD,CER DI:0.01UF,+100-0%,500V	59660	871-533E103P
A70C1064	283-0068-00			CAP,FXD,CER DI:0.01UF,+100-0%,500V	59660	871-533E103P
A70C2024	285-0862-00			CAP,FXD,PLASTIC:0.001,10%,100V	19396	DU490/74-28219
A70C2031	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C2035	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C2038	285-1056-00			CAP,FXD,PLASTIC:1UF,2%,50V	14752	650B1A105G
A70C2041	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C2045	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C2051	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C2052	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C2053	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C2054	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A70C2055	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C2058	283-0220-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR205C103MAA
A70C3026	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A70C3029	283-0167-00			CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Discont			
A70C3031	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A70C3038	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A70C3039	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A70C3041	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A70C3051	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A70C3053	281-0619-00			CAP, FXD, CER DI: 1.2PF, +/-0.1PF, 500V	52763	2RDPLZ007 1P20BC
A70C4015	283-0156-00			CAP, FXD, CER DI: 1000PF, +80-20%, 200V	04222	SR152E102ZAA
A70C4016	283-0238-00			CAP, FXD, CER DI: 0.01UF, 10%, 50V	04222	SR205C103KAA
A70C4026	283-0177-00			CAP, FXD, CER DI: 1UF, +80-20%, 25V	04222	SR305E105ZAA
A70C4046	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A70C4052	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A70C4057	283-0167-00			CAP, FXD, CER DI: 0.1UF, 10%, 100V	04222	SR301C104KAA
A70CR1043	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR1045	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR2013	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR2029	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR2058	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR2059	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR3016	152-0107-00			SEMICON DVC, DI: RECT, SI, 400 V, 400MA, A1	12969	"G727"
A70CR3017	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR3018	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR3022	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR3023	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR3024	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR3028	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR3051	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR3059	152-0107-03			SEMICON DVC, DI: RECT, SI, 400V, 400MA, A1	04713	1N4004
A70CR3060	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR3066	152-0107-03			SEMICON DVC, DI: RECT, SI, 400V, 400MA, A1	04713	1N4004
A70CR4012	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70CR4013	152-0141-02			SEMICON DVC, DI: SW, SI, 30V, 150MA, 30V, DO-35	03508	DA2527 (1N4152)
A70DS1062	150-1049-00			LT EMITTING DIO: RED/GREEN	72619	521-9354
A70M1019	149-0046-01			METER, T TOTLZ: 5000 HRS, 55-700 VDC	80009	149-0046-01
A70Q1015	151-0301-00			TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A70Q1017	151-0302-00			TRANSISTOR: NPN, SI, TO-18	04713	ST899
A70Q1028	151-0301-00			TRANSISTOR: PNP, SI, TO-18	80009	151-0301-00
A70Q2011	151-0190-00			TRANSISTOR: NPN, SI, TO-92	80009	151-0190-00
A70Q2022	151-0192-00			TRANSISTOR: NPN, SI, TO-92	04713	SPS8801
A70Q2025	151-0302-00			TRANSISTOR: NPN, SI, TO-18	04713	ST899
A70Q2042	151-0302-00			TRANSISTOR: NPN, SI, TO-18	04713	ST899
A70Q2044	151-0302-00			TRANSISTOR: NPN, SI, TO-18	04713	ST899
A70Q2059	151-0190-00			TRANSISTOR: NPN, SI, TO-92	80009	151-0190-00
A70Q2067	151-0188-00			TRANSISTOR: PNP, SI, TO-92	80009	151-0188-00
A70Q3011	151-0190-00			TRANSISTOR: NPN, SI, TO-92	80009	151-0190-00
A70Q3024	151-0290-00			TRANSISTOR: NPN, SI, TO-39	80009	151-0290-00
A70Q3025	151-0134-00			TRANSISTOR: PNP, SI, TO-39	04713	SM3195
A70Q3028	151-0391-00			TRANSISTOR: DARLINGTON, PNP, SI	04713	SPS6867K
A70Q3047	151-0302-00			TRANSISTOR: NPN, SI, TO-18	04713	ST899
A70Q4058	151-0615-00			TRANSISTOR: NPN, SI, TO-202	80009	151-0615-00
A70Q4059	151-0612-00			TRANSISTOR: PNP, SI	04713	SOS359
A70R1010	307-0696-00			RES NTWK, FXD, FI: 7, 10K OHM, 2%, 0.15W EACH	01121	108A103
A70R1015	321-0481-00			RES, FXD, FILM: 1M OHM, 1%, 0.125W, TC=TO	19701	5043ED1M000F
A70R1020	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A70R1021	311-1198-00			RES, VAR, NONNW: TRMR, 20K OHM, 0.5W	32997	3386X-T07-203
A70R1022	317-0244-00			RES, FXD, CMPSN: 240K OHM, 5%, 0.125W	01121	BB2445
A70R1023	315-0472-00			RES, FXD, FILM: 4.7K OHM, 5%, 0.25W	57668	NTR25J-E04K7
A70R1024	315-0472-00			RES, FXD, FILM: 4.7K OHM, 5%, 0.25W	57668	NTR25J-E04K7
A70R1025	315-0682-00			RES, FXD, FILM: 6.8K OHM, 5%, 0.25W	57668	NTR25J-E06K8



Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A7OR1026	315-0682-00		RES,FXD,FILM:6.8K OHM,5%,0.25W	57668	NTR25J-E06K8
A7OR1027	311-1245-00		RES,VAR,NONWV:TRMR,10K OHM,0.5W	32997	3386X-DY6-103
A7OR1028	317-0103-00		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A7OR1030	311-1248-00		RES,VAR,NONWV:TRMR,500 OHM,0.5W	32997	3386X-T07-501
A7OR1044	321-0382-00		RES,FXD,FILM:93.1K OHM,1%,0.125W,TC=TO	07716	CEAD93101F
A7OR1045	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A7OR1046	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A7OR1050	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A7OR1051	311-1247-00		RES,VAR,NONWV:TRMR,1MEG OHM,0.5W	73138	72XR1MEG-35B
A7OR1052	301-0473-00		RES,FXD,FILM:47K OHM,5%,0.5W	19701	5053CX47K00J
A7OR1054	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A7OR1055	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A7OR1056	321-0193-00		RES,FXD,FILM:1K OHM,1%,0.125W,TC=TO	19701	5033ED1K00F
A7OR1058	311-1241-00		RES,VAR,NONWV:TRMR,100K OHM,0.5W	32997	3386X-T07-104
A7OR1064	301-0104-00		RES,FXD,FILM:100K OHM,5%,0.5W	19701	5053CX100K0J
A7OR1065	311-1198-00		RES,VAR,NONWV:TRMR,20K OHM,0.5W	32997	3386X-T07-203
A7OR1066	301-0473-00		RES,FXD,FILM:47K OHM,5%,0.5W	19701	5053CX47K00J
A7OR1067	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A7OR1068	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A7OR2022	315-0472-00		RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A7OR2024	321-0279-00		RES,FXD,FILM:7.87K OHM,1%,0.125W,TC=TO	07716	CEAD78700F
A7OR2025	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A7OR2026	315-0682-00		RES,FXD,FILM:6.8K OHM,5%,0.25W	57668	NTR25J-E06K8
A7OR2027	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A7OR2028	317-0103-00		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A7OR2050	321-0251-00		RES,FXD,FILM:4.02K OHM,1%,0.125W,TC=TO	19701	5033ED4K020F
A7OR2051	317-0242-00		RES,FXD,CMPSN:2.4K OHM,5%,0.125W	01121	BB2425
A7OR2052	315-0512-00		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A7OR2053	315-0162-00		RES,FXD,FILM:1.6K OHM,5%,0.25W	19701	5043CX1K600J
A7OR2054	317-0183-00		RES,FXD,CMPSN:18K OHM,5%,0.125W	01121	BB1835
A7OR2055	321-0660-00		RES,FXD,FILM:417 OHM,1%,0.125W,TC=TO	91637	MFF1816G417R0F
A7OR2056	317-0912-00		RES,FXD,CMPSN:9.1K OHM,5%,0.125W	01121	BB9125
A7OR2057	301-0753-00		RES,FXD,FILM:75K OHM,5%,0.5W	01121	EB7535
A7OR2058	317-0101-00		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A7OR2059	321-0318-00		RES,FXD,FILM:20.0K OHM,1%,0.125W,TC=TO	19701	5033ED20K00F
A7OR2060	317-0622-00		RES,FXD,CMPSN:6.2K OHM,5%,0.125W	01121	BB6225
A7OR2063	315-0272-00		RES,FXD,FILM:2.7K OHM,5%,0.25W	57668	NTR25J-E02K7
A7OR2064	315-0471-00		RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A7OR2065	317-0201-00		RES,FXD,CMPSN:200 OHM,5%,0.125W	01121	BB2015
A7OR2066	315-0563-00		RES,FXD,FILM:56K OHM,5%,0.25W	19701	5043CX56K00J
A7OR3010	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A7OR3011	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A7OR3012	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A7OR3013	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A7OR3016	315-0202-00		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A7OR3041	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A7OR3045	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A7OR3050	315-0272-00		RES,FXD,FILM:2.7K OHM,5%,0.25W	57668	NTR25J-E02K7
A7OR3051	307-1254-00		RES NTWK,FXD,FI:PWR SUPPLY BALANCE DETECTOR	80009	307-1254-00
A7OR3056	321-0431-00		RES,FXD,FILM:301K OHM,1%,0.125W,TC=TO	07716	CEAD30102F
A7OR3059	321-0431-00		RES,FXD,FILM:301K OHM,1%,0.125W,TC=TO	07716	CEAD30102F
A7OR3060	321-0318-00		RES,FXD,FILM:20.0K OHM,1%,0.125W,TC=TO	19701	5033ED20K00F
A7OR4010	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A7OR4012	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A7OR4013	315-0274-00		RES,FXD,FILM:270K OHM,5%,0.25W	57668	NTR25J-E270K
A7OR4014	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A7OR4016	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A7CR4024	315-0473-00		RES,FXD,FILM:47K OHM,5%,0.25W	57668	NTR25J-E47K0

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A70R4058	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RRO0J
A70S3052	260-2031-00		SWITCH,ROCKER:(7)SPST,30VDC,125MA	81073	76SB07S
A70U2034	156-1335-00		MICROCKT,DGTL:LSTTL,DUAL RETRIGGERABLE RESE	80009	156-1335-00
			TTABLE MONOSTABLE MV,SCRN		
A70U2036	156-0385-02		MICROCKT,DGTL:HEX INVERTER,SCRN	80009	156-0385-02
A70U2038	156-0467-02		MICROCKT,DGTL:QUAD 2-INP NAND BFR W/OC OUT	80009	156-0467-02
A70U2039	156-0452-02		MICROCKT,DGTL:4-WIDE,2-INP AOI,SCREENED	04713	SN74LS54 ND/JD
A70U2045	156-0469-02		MICROCKT,DGTL:3/8 LINE DCDR,SCRN	80009	156-0469-02
A70U2051	156-1225-01		MICROCKT,LINER:DUAL COMPARATOR,SCREENED	01295	LM393P3
A70U3029	156-0206-02		MICROCKT,DGTL:CORE DRIVER,SCREENED	80009	156-0206-02
A70U3034	156-0206-02		MICROCKT,DGTL:CORE DRIVER,SCREENED	80009	156-0206-02
A70U3038	156-0206-02		MICROCKT,DGTL:CORE DRIVER,SCREENED	80009	156-0206-02
A70U3046	156-0913-02		MICROCKT,DGTL:OCTAL D FF W/ENABLE,SCRN	80009	156-0913-02
A70U3051	156-1225-01		MICROCKT,LINER:DUAL COMPARATOR,SCREENED	01295	LM393P3
A70U3052	156-0914-02		MICROCKT,DGTL:OCT ST BFR W/3 STATE OUT,SCRN	80009	156-0914-02
A70U4023	156-0067-12		MICROCKT,LINER:OPERATIONAL AMPLIFIER	01295	UA741CJG
A70VR1052	152-0288-00		SEMICONDCVC,DI:ZEN,SI,140V,5%,400MW	80009	152-0288-00
A70VR2014	152-0265-00		SEMICONDCVC,DI:ZEN,SI,24V,5%,0.4W	04713	1N970B
A70VR2053	152-0662-00		SEMICONDCVC,DI:ZEN,SI,5V,1%,400MW,DO-7	04713	SZG195RL
A70VR2062	152-0087-00		SEMICONDCVC,DI:ZEN,SI,100V,5%,1W,A31A	04713	SZ1627RL
A70VR3015	152-0281-00		SEMICONDCVC,DI:ZEN,SI,22V,5%,0.4W,DO-7	12954	1N969B/DO-35
A72	670-9090-04		CIRCUIT BD ASSY:SWEEP	80009	670-9090-04
A72C1010	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C1020	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C1030	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C1044	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C1046	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C1061	295-0171-00		CAP SET,MATCHED:510PF,5UF,0.05UF,MATCHED 1%	84411	TEK140UF(ST)5100
A72C1065	295-0171-00		CAP SET,MATCHED:510PF,5UF,0.05UF,MATCHED 1%	84411	TEK140UF(ST)5100
A72C2018	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C2019	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C2030	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C2040	283-5001-00		CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A72C2042	283-5001-00		CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A72C2044	283-5001-00		CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A72C2046	283-0212-00		CAP,FXD,CER DI:2UF,20%,50V	04222	SR405E205MAA
A72C2048	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C2050	283-5001-00		CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A72C2054	290-0973-00		CAP,FXD,ELCTLT:100UF,20%,25VDC	55680	ULB1E101MPA
A72C2060	295-0171-00		CAP SET,MATCHED:510PF,5UF,0.05UF,MATCHED 1%	84411	TEK140UF(ST)5100
A72C3012	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C3018	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C3025	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C3027	283-0212-00		CAP,FXD,CER DI:2UF,20%,50V	04222	SR405E205MAA
A72C3030	290-5001-00		CAP,FXD,ELCTLT:10UF,20%,16V	TK0900	ALCHIP-S16V10UF
A72C3032	283-5003-00		CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A72C3034	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C3036	283-5001-00		CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A72C3038	283-0212-00		CAP,FXD,CER DI:2UF,20%,50V	04222	SR405E205MAA
A72C3039	283-5001-00		CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA
A72C3040	283-5000-00		CAP,FXD,CER DI:10PF,5%,50V	95275	VJ1206A101JXA
A72C3042	290-0943-00		CAP,FXD,ELCTLT:47UF,+50-20%,25V	55680	ULB1E470TAAANA
A72C3044	290-0943-00		CAP,FXD,ELCTLT:47UF,+50-20%,25V	55680	ULB1E470TAAANA
A72C3045	283-0108-00		CAP,FXD,CER DI:220PF,10%,200V	04222	SR152A221KAA
A72C3046	283-5004-00		CAP,FXD,CER DI:0.1UF,10%,25V	20932	W1206X104K1B02
A72C3050	290-0768-00		CAP,FXD,ELCTLT:10UF,+50-20%,100WVDC	54473	ECE-A100V10L
A72C3052	283-5003-00		CAP,FXD,CER DI:0.01UF,10%,50V	14674	12065C103KAT060R
A72C3054	283-5001-00		CAP,FXD,CER DI:100PF,5%,50V	95275	VJ1206A101JXA

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A72C3056	283-5003-00			CAP, FXD, CER DI: 0.01UF, 10%, 50V	14674	12065C103KAT060R
A72C3058	283-5003-00			CAP, FXD, CER DI: 0.01UF, 10%, 50V	14674	12065C103KAT060R
A72C4025	283-5003-00			CAP, FXD, CER DI: 0.01UF, 10%, 50V	14674	12065C103KAT060R
A72C4036	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A72C4040	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A72C4042	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A72C4044	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A72C4046	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A72C4048	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A72C4050	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A72C4052	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A72C4058	283-5004-00			CAP, FXD, CER DI: 0.1UF, 10%, 25V	20932	W1206X104K1B02
A72CR1051	152-0246-00	B010100	B010129	SEMICON DVC, DI: SW, SI, 40V, 200MA, DO-7	14433	WG1537TK
A72CR1051	152-0324-00	B010130		SEMICON DVC, DI: SW, SI, 35V, 0.1A, DO-7	14552	MT5128
A72CR1052	152-0246-00	B010100	B010129	SEMICON DVC, DI: SW, SI, 40V, 200MA, DO-7	14433	WG1537TK
A72CR1052	152-0324-00	B010130		SEMICON DVC, DI: SW, SI, 35V, 0.1A, DO-7	14552	MT5128
A72CR2030	152-5004-00			SEMICON DVC, DI: SI, SW, SER PR, 70V	04713	BAV99T1
A72CR3030	152-5005-00			SEMICON DVC, DI: DUAL, COMMON ANODE, 70V, BAW56	04713	MBAW56T1
A72CR3040	152-5004-00			SEMICON DVC, DI: SI, SW, SER PR, 70V	04713	BAV99T1
A72CR4025	152-5004-00			SEMICON DVC, DI: SI, SW, SER PR, 70V	04713	BAV99T1
A72L4040	108-0417-01			COIL, RF: FIXED, 110UH	80009	108-0417-01
A72Q1062	151-5002-00			TRANSISTOR: JFET, N-CH, RDS=60	04713	MMBF4392T1
A72Q2030	151-0232-00			TRANSISTOR: NPN, SI, DUAL, TO-78	07263	SP12141
A72Q2060	151-5002-00			TRANSISTOR: JFET, N-CH, RDS=60	04713	MMBF4392T1
A72Q2064	151-5002-00			TRANSISTOR: JFET, N-CH, RDS=60	04713	MMBF4392T1
A72Q2068	151-5002-00			TRANSISTOR: JFET, N-CH, RDS=60	04713	MMBF4392T1
A72Q3015	151-5001-00			TRANSISTOR: NPN, SI, SOT-23	80009	151-5001-00
A72Q3020	151-5001-00			TRANSISTOR: NPN, SI, SOT-23	80009	151-5001-00
A72Q3025	151-5001-00			TRANSISTOR: NPN, SI, SOT-23	80009	151-5001-00
A72Q3030	151-0232-00			TRANSISTOR: NPN, SI, DUAL, TO-78	07263	SP12141
A72Q4032	151-5001-00			TRANSISTOR: NPN, SI, SOT-23	80009	151-5001-00
A72Q4037	151-5001-00			TRANSISTOR: NPN, SI, SOT-23	80009	151-5001-00
A72R1010	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A72R1020	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A72R1050	321-5017-00			RES, FXD, FILM: 825 OHM, 1%, 0.125W	01121	BCK8250FT
A72R1051	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A72R1052	311-1239-00			RES, VAR, NONWW: TRMR, 2.5K OHM, 0.5W	32997	3386X-T07-252
A72R1053	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A72R1055	321-5029-00			RES, FXD, FILM: 8.25K, 1%, 0.125W	01121	BCK8251FT
A72R1057	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A72R1059	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A72R1060	321-0384-00			RES, FXD, FILM: 97.6K OHM, 1%, 0.125W, TC=TO	07716	CEAD97601F
A72R1062	311-1240-00			RES, VAR, NONWW: TRMR, 25K OHM, 10%, 0.5W	32997	3386X-T07-253
A72R1064	321-5047-00			RES, FXD, FILM: 100K, 1%, 0.125W	01121	BCK1003FT
A72R1066	321-5015-00			RES, FXD, FILM: 562 OHM, 1%, 0.125W	01121	BCK5620FT
A72R1068	321-0393-00			RES, FXD, FILM: 121K OHM, 1%, 0.125W, TC=TO	19701	5043ED121KOF
A72R2010	321-0163-00			RES, FXD, FILM: 487 OHM, 1%, 0.125W, TC=TO	07716	CEAD487ROF
A72R2012	321-0256-00			RES, FXD, FILM: 4.53K OHM, 1%, 0.125W, TC=TO	19701	5033ED4K53OF
A72R2013	321-5047-00			RES, FXD, FILM: 100K, 1%, 0.125W	01121	BCK1003FT
A72R2015	321-5032-00			RES, FXD, FILM: 15.0K, 1%, 0.125W	01121	BCK1502FT
A72R2017	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A72R2018	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A72R2019	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A72R2020	321-5015-00			RES, FXD, FILM: 562 OHM, 1%, 0.125W	01121	BCK5620FT
A72R2022	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A72R2024	321-5030-00			RES, FXD, FILM: 10.0K, 1%, 0.125W	01121	BCK1002FT
A72R2026	321-5023-00			RES, FXD, FILM: 2.74K, 1%, 0.125W	01121	BCK2741FT
A72R2028	321-5021-00			RES, FXD, FILM: 1.82K, 1%, 0.125W	01121	BCK1821FT

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Discnt	Name & Description	Mfr. Code	Mfr. Part No.
A72R2030	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R2031	317-0104-00		RES,FXD,CMPSN:100K OHM,5%,0.125W	01121	BB1045
A72R2032	321-5022-00		RES,FXD,FILM:2.21K,1%,0.125W	01121	BCK2211FT
A72R2034	321-5018-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A72R2034	321-5019-00		RES,FXD,FILM:1.21K,1%,0.125W	01121	BCK1211FT
A72R2036	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R2040	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R2042	321-5028-00		RES,FXD,FILM:6.81K,1%,0.125W	01121	BCK6811FT
A72R2044	315-0302-00		RES,FXD,FILM:3K OHM,5%,0.25W	57668	NTR25J-E03K0
A72R2046	321-5026-00		RES,FXD,FILM:4.75K,1%,0.125W	01121	BCK4751FT
A72R2048	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R2050	321-5023-00		RES,FXD,FILM:2.74K,1%,0.125W	01121	BCK2741FT
A72R2052	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R2054	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A72R2060	321-5048-00		RES,FXD,FILM:332K,1%,0.125W	01121	BCK3323FT
A72R2064	321-5047-00		RES,FXD,FILM:100K,1%,0.125W	01121	BCK1003FT
A72R2068	321-5047-00		RES,FXD,FILM:100K,1%,0.125W	01121	BCK1003FT
A72R2069	321-5026-00		RES,FXD,FILM:4.75K,1%,0.125W	01121	BCK4751FT
A72R3010	321-0259-00		RES,FXD,FILM:4.87K OHM,1%,0.125W,TC=TO	07716	CEAD48700F
A72R3012	315-0106-00		RES,FXD,FILM:10M OHM,5%,0.25W	01121	CB1065
A72R3014	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A72R3016	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A72R3018	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A72R3020	321-5023-00		RES,FXD,FILM:2.74K,1%,0.125W	01121	BCK2741FT
A72R3021	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A72R3022	321-5032-00		RES,FXD,FILM:15.0K,1%,0.125W	01121	BCK1502FT
A72R3023	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R3024	321-5049-00		RES,FXD,FILM:1 MEG,1%,0.125W	01121	BCK1004FT
A72R3025	321-5023-00		RES,FXD,FILM:2.74K,1%,0.125W	01121	BCK2741FT
A72R3026	321-5032-00		RES,FXD,FILM:15.0K,1%,0.125W	01121	BCK1502FT
A72R3027	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R3028	315-0475-00		RES,FXD,FILM:4.7M OHM,5%,0.25W	01121	CB4755
A72R3029	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R3030	321-5047-00		RES,FXD,FILM:100K,1%,0.125W	01121	BCK1003FT
A72R3031	321-5013-00		RES,FXD,FILM:392 OHM,1%,0.125W	01121	BCK3920FT
A72R3032	321-5018-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A72R3033	321-5022-00		RES,FXD,FILM:2.21K,1%,0.125W	01121	BCK2211FT
A72R3034	321-5023-00		RES,FXD,FILM:2.74K,1%,0.125W	01121	BCK2741FT
A72R3035	321-5024-00		RES,FXD,FILM:3.32K,1%,0.125W	01121	BCK3321FT
A72R3036	321-5021-00		RES,FXD,FILM:1.82K,1%,0.125W	01121	BCK1821FT
A72R3037	321-5036-00		RES,FXD,FILM:33.2K,1%,0.125W	01121	BCK3322FT
A72R3038	317-0154-00		RES,FXD,CMPSN:150K OHM,5%,0.125	01121	BB1545
A72R3040	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R3042	321-0317-00		RES,FXD,FILM:19.6K OHM,1%,0.125W,TC=TO	07716	CEAD19601F
A72R3043	321-0277-00		RES,FXD,FILM:7.50K OHM,1%,0.125W,TC=TO	24546	NA5507501F
A72R3044	321-5018-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A72R3045	321-5004-00		RES,FXD,FILM:22.1 OHM,1%,0.125W	57668	MCR18FWEA22E1
A72R3047	321-5026-00		RES,FXD,FILM:4.75K,1%,0.125W	01121	BCK4751FT
A72R3049	321-5026-00		RES,FXD,FILM:4.75K,1%,0.125W	01121	BCK4751FT
A72R3050	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R3051	321-5028-00		RES,FXD,FILM:6.81K,1%,0.125W	01121	BCK6811FT
A72R3052	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R3053	321-5043-00		RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A72R3054	321-5025-00		RES,FXD,FILM:3.92K,1%,0.125W	01121	BCK3921FT
A72R3055	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R3056	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R3057	321-5043-00		RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A72R3058	321-5033-00		RES,FXD,FILM:18.2K,1%,0.125W	01121	BCK1822FT

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A72R3059	321-0352-00		RES,FXD,FILM:45.3K OHM,1%,0.125W,TC=T0	07716	CEAD45301F
A72R3060	321-0280-00		RES,FXD,FILM:8.06K OHM,1%,0.125W,TC=T0	19701	5033ED8K060F
A72R3062	321-0807-00		RES,FXD,FILM:900K OHM,1%,0.125W,TC=T0	19701	5033RD900K0F
A72R3064	321-1627-06		RES,FXD,FILM:731.3K OHM,0.25%,0.125W,TC=T9	19701	5033RE731K32C
A72R3066	321-0510-07		RES,FXD,FILM:2.00 MEG OHM,0.1%,0.125W,TC=T9	19701	5033RE2M00B
A72R4010	321-5032-00		RES,FXD,FILM:15.0K,1%,0.125W	01121	BCK1502FT
A72R4012	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R4014	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R4016	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R4020	321-5018-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A72R4022	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A72R4024	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A72R4026	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R4032	321-5030-00		RES,FXD,FILM:10.0K,1%,0.125W	01121	BCK1002FT
A72R4036	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A72R4040	321-5043-00		RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A72R4042	321-5043-00		RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A72R4044	321-5043-00		RES,FXD,FILM:47.5 OHM,1%,0.125W	57668	MCR18FWEA47E5
A72R4046	321-5000-00		RES,FXD,FILM:10 OHM,1%,0.125W	57668	MCR18EZHFW10E
A72R4048	321-5027-00		RES,FXD,FILM:5.62K,1%,0.125W	01121	BCK5621FT
A72R4050	321-5006-00		RES,FXD,FILM:100 OHM,1%,0.125W	01121	BCK1000FT
A72R4054	321-0303-00		RES,FXD,FILM:14.0K OHM,1%,0.125W,TC=T0	07716	CEAD 14001F
A72R4056	321-5018-00		RES,FXD,FILM:1.00K,1%,0.125W	01121	BCK1001FT
A72R4060	321-0367-00		RES,FXD,FILM:64.9K OHM,1%,0.125W,TC=T0	07716	CEAD64901F
A72R4061	321-0350-00		RES,FXD,FILM:43.2K OHM,1%,0.125W,TC=T0	19701	5043ED43K20F
A72R4062	321-0307-00		RES,FXD,FILM:15.4K OHM,1%,0.125W,TC=T0	19701	5043ED15K40F
A72R4063	321-0350-00		RES,FXD,FILM:43.2K OHM,1%,0.125W,TC=T0	19701	5043ED43K20F
A72R4064	321-0983-00		RES,FXD,FILM:4.5 MEG OHM,1%,0.125W,TC=T0	91637	CMF55116-G45003F
A72R4065	321-0321-00		RES,FXD,FILM:21.5K OHM,1%,0.125W,TC=T0	07716	CEAD21501F
A72R4066	321-1484-03		RES,FXD,FILM:1.09M OHM,0.25%,0.125W	91637	HFF188D10903C
A72R4067	321-0995-00		RES,FXD,FILM:549K OHM,1%,0.125W,TC=T0	24546	NA5505493F
A72R4068	321-0427-00		RES,FXD,FILM:274K OHM,1%,0.125W,TC=T0	24546	NA5502743F
A72R4069	321-1388-01		RES,FXD,FILM:109K OHM,0.5%,0.125W,TC=T0	24546	NA5501093D
A72U1010	156-5003-00		MICROCKT,DGTL:LSTTL,DUAL D-TYPE FF	01295	SN74LS74D
A72U1015	156-5037-00		MICROCKT,DGTL:LSTTL,HEX INVERTER,SCHMITT	01295	SN74LS14D
A72U1016	156-5003-00		MICROCKT,DGTL:LSTTL,DUAL D-TYPE FF	01295	SN74LS74D
A72U1017	156-5042-00		MICROCKT,DGTL:TTL,HEX INV BUFFER/DRVR W/OC OUTPUTS	01295	SN7406D
A72U1020	156-5001-00		MICROCKT,DGTL:LSTTL,QUAD 2 INPUT NAND GATE	01295	SN74LS00D
A72U1025	156-5003-00		MICROCKT,DGTL:LSTTL,DUAL D-TYPE FF	01295	SN74LS74D
A72U1026	156-5001-00		MICROCKT,DGTL:LSTTL,QUAD 2 INPUT NAND GATE	01295	SN74LS00D
A72U1027	156-5039-00		MICROCKT,DGTL:LSTTL,HEX D TYPE FF W/COMMON	80009	156-5039-00
A72U1030	156-5033-00		MICROCKT,DGTL:LSTTL,3 TO 8 LINE DCDR/DEMUX	18324	74LS138D
A72U1035	156-5039-00		MICROCKT,DGTL:LSTTL,HEX D TYPE FF W/COMMON	80009	156-5039-00
A72U1040	156-5039-00		MICROCKT,DGTL:LSTTL,HEX D TYPE FF W/COMMON	80009	156-5039-00
A72U1045	156-5009-00		MICROCKT,DGTL:OCTAL D FF W/CLEAR	80009	156-5009-00
A72U1047	156-1548-01		MICROCKT,INTFC:CMOS,D/A CONVERTER,12 BIT,CURRENT OUT,MULTIPLYING,AD7541AJN,DIP18.3	51640	AD7541AJN
A72U1050	156-1270-00		MICROCKT,LINEAR:8 CHAN ANALOG MULTIPLEXER	80009	156-1270-00
A72U1055	156-1582-00		MICROCKT,LINEAR:OPERATIONAL AMPL,BIPOLAR	80009	156-1582-00
A72U1060	156-5019-00		MICROCKT,LINEAR:DUAL,SGL SPLY,V COMPTR	80009	156-5019-00
A72U2010	156-5001-00		MICROCKT,DGTL:LSTTL,QUAD 2 INPUT NAND GATE	01295	SN74LS00D
A72U2011	156-5047-00		MICROCKT,DGTL:LSTTL,QUAD 2 TO 1 MUX	18324	74LS157DT1
A72U2015	156-5040-00		MICROCKT,DGTL:LSTTL,QUAD 2-INPUT EXCLUSIVE	01295	SN74LS266D
A72U2017	156-5003-00		MICROCKT,DGTL:LSTTL,DUAL D-TYPE FF	01295	SN74LS74D
A72U2020	156-5032-00		MICROCKT,DGTL:LSTTL,QUAD 2 INP NOR GATE	18324	74LS02D
A72U2025	156-5003-00		MICROCKT,DGTL:LSTTL,DUAL D-TYPE FF	01295	SN74LS74D

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A72U2026	156-5038-00		MICROCKT,DGTL:LSTTL,DUAL 4-INPUT MUX W/ENAB LE	80009	156-5038-00
A72U2030	156-5039-00		MICROCKT,DGTL:LSTTL,HEX D TYPE FF W/Common	80009	156-5039-00
A72U2040	156-1582-00		MICROCKT,LINEAR:OPERATIONAL AMPL,BIPOLAR	80009	156-1582-00
A72U2045	156-1582-00		MICROCKT,LINEAR:OPERATIONAL AMPL,BIPOLAR	80009	156-1582-00
A72U2050	156-5019-00		MICROCKT,LINEAR:DUAL,SGL SPLY,V COMPTR	80009	156-5019-00
A72U3010	156-5019-00		MICROCKT,LINEAR:DUAL,SGL SPLY,V COMPTR	80009	156-5019-00
A72U3025	156-5019-00		MICROCKT,LINEAR:DUAL,SGL SPLY,V COMPTR	80009	156-5019-00
A72U3045	156-0742-00		MICROCKT,LINEAR:OPNL AMPL	01295	LM318P
A72U3050	156-5017-00		MICROCKT,LINEAR:DUAL 741 OP AMP,IMZ,S0-8	04713	MC1458
A72U3060	156-1270-00		MICROCKT,LINEAR:8 CHAN ANALOG MULTIPLEXER	80009	156-1270-00
A72U4010	156-5001-00		MICROCKT,DGTL:LSTTL,QUAD 2 INPUT NAND GATE	01295	SN74LS00D
A72U4015	156-5041-00		MICROCKT,DGTL:LSTTL,HEX BUS DRVR	80009	156-5041-00
A72U4020	156-5034-00		MICROCKT,DGTL:LSTTL,OCTAL BFR W/3 STATE OUT	18324	N74LS244D
A72U4030	156-5033-00		MICROCKT,DGTL:LSTTL,3 TO 8 LINE DCDR/DEMUX	18324	74LS138D
A72U4050	156-0512-03		MICROCKT,LINEAR:OPNL AMPL	04713	LM308J-8
A72U4055	156-1249-00		MICROCKT,LINEAR:VOLTAGE REFERENCE	24355	AD40227
A72VR1053	152-5007-00		SEMICON DVC,DI:ZENER,SI,9.1V,5%	80009	152-5007-00
A72VR1062	152-5007-00		SEMICON DVC,DI:ZENER,SI,9.1V,5%	80009	152-5007-00
A72VR4058	152-0127-00		SEMICON DVC,DI:ZEN,SI,7.5V,5%,0.4W,DO-7	04713	1N9588
A74	670-5559-07		CIRCUIT BD ASSY:HIGH VOLTAGE	80009	670-5559-07
A74C1038	283-0177-00		CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR305E105ZAA
A74C1043	283-0208-00		CAP,FXD,CER DI:0.22UF,10%,200V	04222	SR502C224KAA
A74C1058	283-0728-00		CAP,FXD,MICA DI:120PF,1%,500V	00853	D155F121FO
A74C2084	290-0414-00		CAP,FXD,ELCTLT:8UF,+50-10%,200V	56289	600D805F200DE4
A74C3073	283-0197-00		CAP,FXD,CER DI:470PF,5%,50V	04222	SR205A471JAA
A74C3076	283-0167-00		CAP,FXD,CER DI:0.1UF,10%,100V	04222	SR301C104KAA
A74C3086	283-0198-00		CAP,FXD,CER DI:0.22UF,20%,50V	05397	C330C224M5U1CA
A74C3088	283-0198-00		CAP,FXD,CER DI:0.22UF,20%,50V	05397	C330C224M5U1CA
A74C4072	283-0210-00		CAP,FXD,CER DI:0.0056UF,20%,100V	04222	SR211C562MAA
A74CR1044	152-0107-03		SEMICON DVC,DI:RECT,SI,400V,400MA,A1	04713	1N4004
A74CR1046	152-0242-00		SEMICON DVC,DI:SIG,SI,225V,0.2A,DO-7	07263	FDH5004
A74CR1047	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A74CR1048	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A74CR1056	152-0242-00		SEMICON DVC,DI:SIG,SI,225V,0.2A,DO-7	07263	FDH5004
A74CR1079	152-0107-03		SEMICON DVC,DI:RECT,SI,400V,400MA,A1	04713	1N4004
A74CR1086	152-0400-00		SEMICON DVC,DI:RECT,SI,400V,1A	04713	1N4936RL
A74CR2044	152-0242-00		SEMICON DVC,DI:SIG,SI,225V,0.2A,DO-7	07263	FDH5004
A74CR2046	152-0242-00		SEMICON DVC,DI:SIG,SI,225V,0.2A,DO-7	07263	FDH5004
A74CR3077	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A74CR4071	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A74CR4077	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A74CR4078	152-0141-02		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A74Q1073	151-0423-00		TRANSISTOR:NPN,SI,TO-220AB	80009	151-0423-00
A74Q2048	151-0443-00		TRANSISTOR:PNP,SI,TO-92	04713	SPS7950
A74R151	315-0334-00		RES,FXD,FILM:330K OHM,5%,0.25W	57668	NTR25J-E 330K
A74R1042	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A74R1043	301-0472-00		RES,FXD,FILM:4.7K OHM,5%,0.5W	19701	5053CX4K700J
A74R1048	315-0224-00		RES,FXD,FILM:220K OHM,5%,0.25W	57668	NTR25J-E220K
A74R2012	308-0581-00		RES,FXD,WW:4.75 OHM,0.5%,0.5W	00213	500S 4R750D
A74R2040	311-1287-00		RES,VAR,NONWW:TRMR,100K OHM,0.5W	32997	3329S-L58-104
A74R2050	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A74R3033	311-1968-00		RES,VAR,NONWW:PNL,5M OHM,20%,0.5W	01121	72M4N048S505M
A74R3071	315-0221-00		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A74R3072	315-0392-00		RES,FXD,FILM:3.9K OHM,5%,0.25W	57668	NTR25J-E03K9
A74R3074	315-0105-00		RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A74R3075	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A74R3078	315-0133-00		RES,FXD,FILM:13K OHM,5%,0.25W	19701	5043CX13K00J

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A74R3079	315-0184-00		RES,FXD,FILM:180K OHM,5%,0.25W	19701	5043CX180K0J
A74R4038	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A74R4074	315-0473-00		RES,FXD,FILM:47K OHM,5%,0.25W	57668	NTR25J-E47K0
A74R4075	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A74T2065	120-1233-00		XFMR,PWR,SDN&SU:HIGH VOLTAGE	80009	120-1233-00
A74U4083	156-0067-12		MICROCKT,LINEAR:OPERATIONAL AMPLIFIER	01295	UA741CJG
A74VR1041	152-0283-00		SEMICON DVC,DI:ZEN,SI,43V,5%,0.4W,D-07	04713	1N976B
A74A1	-----		(PART OF A74)		
A77	670-5746-01		CIRCUIT BD ASSY:CRT GRATICULE LIGHT	80009	670-5746-01
A77DS1011	150-0029-00		LAMP,INCAND:6.3V,0.2A,#349,MIDGET FLG	58854	349
A77DS1013	150-0029-00		LAMP,INCAND:6.3V,0.2A,#349,MIDGET FLG	58854	349
A77P770	131-0592-00		TERMINAL,PIN:0.885 L X 0.025 SQ BRS GOLD PL	22526	47333
F301	159-0017-00		FUSE,CARTRIDGE:3AG,4A,250V,FAST BLOW	71400	MTH-CW-4
F301	159-0023-00		FUSE,CARTRIDGE:3AG,2A,250V,SLOW BLOW	71400	MDX2
			(OPTIONS A1,A2,A3,A4,A5 ONLY)		
FL10	119-0294-01		FILTER,LOW PASS:DC TO 1.8GHZ	50140	11L250-X1800-0
FL11	119-1752-00		FLTR CA ASSY,RF:50 OHM COAX,7.12 L,SEMI-RGD	80009	119-1752-00
FL12	119-2048-00		FLTR,YIG TUNED:	80009	119-2048-00
FL15	119-1753-00		FLTR CA ASSY,RF:50 OHM COAX,7.14 L,SEMI-RGD	80009	119-1753-00
FL16	119-1018-00		DIR FILTER ASSY:	80009	119-1018-00
FL36	119-2403-00		FILTER,BANDPASS:110MHZ	80009	119-2403-00
FL37	119-2414-00		FILTER,LOW PASS:110 MHZ	80009	119-2414-00
FL680	119-2033-00		FILTER,CRYSTAL:100HZ BW,10MHZ CF	34630	001-43360
P133	015-1022-00		TERMN,COAXIAL:50 OHM,0.5W,SMA	18203	T198CS
P144	015-1022-00		TERMN,COAXIAL:50 OHM,0.5W,SMA	18203	T198CS
P145	015-1022-00		TERMN,COAXIAL:50 OHM,0.5W,SMA	18203	T198CS
P164	015-1022-00		TERMN,COAXIAL:50 OHM,0.5W,SMA	18203	T198CS
P222	131-0938-00		CONN,RCPT,ELEC:SMB,FEMALE	24931	32JR125-1
P620	131-0372-00		CONN,RCPT,ELEC:CON-HEX,MALE	24931	32JR104-1
P621	131-0372-00		CONN,RCPT,ELEC:CON-HEX,MALE	24931	32JR104-1
P800	015-1022-00		TERMN,COAXIAL:50 OHM,0.5W,SMA	18203	T198CS
P900	015-1022-00		TERMN,COAXIAL:50 OHM,0.5W,SMA	18203	T198CS
S11	119-1161-01		SW,RF XMSN LINE:DC TO 21GHZ,60 DB ISLN	24022	CS33S90-8
S12	119-1161-01		SW,RF XMSN LINE:DC TO 21GHZ,60 DB ISLN	24022	CS33S90-8
S13	119-1161-01		SW,RF XMSN LINE:DC TO 21GHZ,60 DB ISLN	24022	CS33S90-8
T200	120-1545-00		TRANSFORMER,RF:75 OHM BNC INPUT/50 OHM SMA OUTPUT (OPTION 07 ONLY)	98821	NH-12296
V100	154-0910-00		ELECTRON TUBE:CRT,P31,A284C	80009	154-0910-00
V100	154-0934-00	B010130	ELECTRON TUBE:T4920 OPT 43 (OPTION 43 ONLY)	80009	154-0934-00
W100	175-7400-01		CABLE ASSY,RF:50 OHM COAX,MW SWITCH TO ATTE NUATOR,SEMI-RIGID	80009	175-7400-01
W101	175-7401-02		CABLE ASSY,RF:50 OHM COAX,RF CONNECTOR TO A TTENUATOR,SEMI-RIGID	80009	175-7401-02
W102	175-9262-00		CABLE ASSY,RF:50 OHM COAX,4.224 L	80009	175-9262-00
W104	175-9261-00		CABLE ASSY,RF:50 OHM COAX,7.572 L	80009	175-9261-00
W106	175-9582-00		CABLE ASSY,RF:50 OHM COAX,2.82 L	80009	175-9582-00
W112	175-7403-01		CABLE ASSY,RF:50 OHM COAX,1.949 L,SEMI RIGI D	80009	175-7403-01
W114	175-2530-02		CABLE ASSY,RF:50 OHM COAX,6.34 L	80009	175-2530-02
W116	175-9263-00		CABLE ASSY,RF:50 OHM COAX,2.94 L	80009	175-9263-00
W117	174-0924-00		CABLE ASSY,RF:50 OHM COAX	80009	174-0924-00
W124	175-2542-02		CABLE ASSY,RF:50 OHM COAX,2.62 L	80009	175-2542-02
W125	175-3024-03		CABLE ASSY,RF:50 OHM COAX,6.89 L {OPTION 07 & 08 ONLY}	80009	175-3024-03
W126	175-7402-01		CABLE ASSY,RF:50 OHM COAX,1.737 L,SEMI-RIGI D	80009	175-7402-01

Replaceable Electrical Parts  
492B/492BP Service Vol.2

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discount	Name & Description	Mfr. Code	Mfr. Part No.
W130	175-2345-00			CABLE ASSY,RF:50 OHM COAX,10.29 L	80009	175-2345-00
W132	175-2762-02			CABLE ASSY,RF:50 OHM COAX,17.56 L	80009	175-2762-02
W137	175-9196-01			CABLE ASSY,RF:50 OHM COAX,W/O JKT,SEMI RIGID,TRANS SWC TO EXT MIX	80009	175-9196-01
W138	175-2541-02			CABLE ASSY,RF:50 OHM COAX,6.1 L	80009	175-2541-02
W162	175-7399-01			CABLE ASSY,RF:50 OHM COAX,DIR FILTER TO DIP LEXER IN,SEMI-RIGID	80009	175-7399-01
W164	175-7399-01			CABLE ASSY,RF:50 OHM COAX,DIR FILTER TO DIP LEXER IN,SEMI-RIGID	80009	175-7399-01
W166	175-2763-00			CABLE ASSY,RF:50 OHM COAX,3.13 L	80009	175-2763-00
W182	175-2406-00			CABLE ASSY,RF:50 OHM COAX,3.0 L	80009	175-2406-00
W190	175-2415-00			CABLE ASSY,RF:50 OHM COAX,7.0 L (OPTION 42 ONLY)	80009	175-2415-00
W191	175-2415-00			CABLE ASSY,RF:50 OHM COAX,7.0 L (OPTION 42 ONLY)	80009	175-2415-00
W220	175-4542-00			CABLE ASSY,RF:50 OHM COAX,8.9 L,SEMIRIGID	80009	175-4542-00
W224	175-7601-00			CABLE ASSY,RF:50 OHM COAX,20.35 L	80009	175-7601-00
W232	175-2407-00			CABLE ASSY,RF:50 OHM COAX,5.0 L	80009	175-2407-00
W236	175-9195-01			CABLE ASSY,RF:50 OHM COAX SEMI-RIGID	80009	175-9195-01
W240	175-7397-00			CABLE ASSY,RF:50 OHM COAX,HARMONIC MIXER TO PHASE GATE,SEMI RIGID	80009	175-7397-00
W250	175-7398-00			CABLE ASSY,RF:50 OHM COAX,HARMONIC MIXER TO BIAS RETURN,SEMI RIGID	80009	175-7398-00
W252	175-7602-00			CABLE ASSY,RF:50 OHM COAX,18.35 L	80009	175-7602-00
W320	175-2406-00			CABLE ASSY,RF:50 OHM COAX,3.0 L	80009	175-2406-00
W340	175-9254-00			CABLE ASSY,RF:50 OHM COAX,17.52 L	80009	175-9254-00
W341	175-2415-00			CABLE ASSY,RF:50 OHM COAX,7.0 L (OPTION 07 ONLY)	80009	175-2415-00
W342	175-2413-00			CABLE ASSY,RF:50 OHM COAX,13.0 L	80009	175-2413-00
W344	175-2411-00			CABLE ASSY,RF:50 OHM COAX,17.0 L	80009	175-2411-00
W346	175-2409-00			CABLE ASSY,RF:50 OHM COAX,8.0 L	80009	175-2409-00
W347	175-7597-00			CABLE ASSY,RF:50 OHM COAX,18.25 L	80009	175-7597-00
W348	175-2410-00			CABLE ASSY,RF:50 OHM COAX,10.0 L	80009	175-2410-00
W350	175-8962-00			CABLE ASSY,RF:50 OHM COAX,14.46 L,POLTHN JKT	80009	175-8962-00
W360	175-2418-00			CABLE ASSY,RF:50 OHM COAX,2.5 L	80009	175-2418-00
W370	175-2402-00			CABLE ASSY,RF:50 OHM COAX,12.0 L	80009	175-2402-00
W502	175-2402-00			CABLE ASSY,RF:50 OHM COAX,12.0 L	80009	175-2402-00
W622	175-7788-00			CABLE ASSY,RF:50 OHM,COAX,8.25 L	80009	175-7788-00
W682	175-2418-00			CABLE ASSY,RF:50 OHM COAX,2.5 L	80009	175-2418-00
W684	175-2415-00			CABLE ASSY,RF:50 OHM COAX,7.0 L	80009	175-2415-00
W694	175-2409-00			CABLE ASSY,RF:50 OHM COAX,8.0 L	80009	175-2409-00
W700	175-9293-01			CABLE ASSY,RF:75 OHM COAX INPUT (OPTION 07 ONLY)	80009	175-9293-01
W701	175-9295-02			CABLE ASSY,RF:TRANS SW TO ATTEN (OPTION 07 ONLY)	80009	175-9295-02
W702	175-9296-01			CABLE ASSY,RF:50 OHM COAX RF INPUT (OPTION 07 ONLY)	80009	175-9296-01
W703	175-2412-00			CABLE ASSY,RF:50 OHM COAX,12.0 L (OPTION 07 ONLY)	80009	175-2412-00
W1025	175-2372-00			CABLE ASSY,RF:50 OHM COAX,3,26 AWG,5.0 L	TK1375	175-2372-00
W1037	198-4424-00			WIRE SET,ELEC:	80009	198-4424-00
W1038	175-0863-00			CABLE, SP,ELEC:2,22 AWG,STRD,PVC JKT,RBN	TK0846	02CF2M7-BBT
W1044	175-7789-00			CABLE ASSY,RF:50 OHM COAX,15.25 L	80009	175-7789-00
W1060	175-7598-00			CABLE ASSY,RF:50 OHM COAX,13.25 L	80009	175-7598-00