

Accessories Index

PAGE	MODEL	DESCRIPTION	APPLICABLE DEVICE
F8	ADB-002	DC Block BNC 50 Ohm 10MHz to 2.2GHz	GSP-9300
F8	ADB-006	DC Block N-TYPE 50 Ohm 10MHz to 6GHz	GSP-9300
F8	ADB-008	DC Block SMA 50 Ohm 0.1MHz to 8GHz	GSP-9300
F8	ADP-001	Adaptor, 50Ω, BNC(I/F) - N(P/M)	GSP-Series
F8	ADP-002	Adaptor, 50Ω, SMA(I/F) - N(P/M)	GSP-Series, GRF-3300S
C41	ADP-003	Adaptor, 50Ω, N(I/F) - SMA(I/F)	USG-Series
F8	ADP-101	Adaptor, 75Ω BNC(I/F) - 50Ω BNC(P/M)	GSP-Series
C21	AFG-125	USB Arbitrary Function Generator, 1CH/25MHz	GDS-2000A Series
C21	AFG-225	USB Arbitrary Function Generator, 2CH/25MHz	GDS-2000A Series
D68	APS-001	GPIO interface card	APS-7000 Series
D68	APS-002	RS-232 / USB interface card	APS-7000 Series
D68	APS-003	Output Voltage Capacity (0 – 600Vrms)	APS-7000 Series
D68	APS-004	Output Frequency Capacity (45–999.9Hz)	APS-7000 Series
F8	ATA-001	Antenna, General FM Antenna, BNC(M)	GSP-Series
F8	ATN-100	Adaptor, 10dB Attenuator, 50Ω, N(I/F)-N(P/M)	GSP-Series
A18	DS2-08LA	8-Channel Logic Analyzer, Includes 8-channel Logic analyzer card (GLA-08) and 8 channel Logic analyser probe (GTL-08LA)	GDS-2000A Series
A18	DS2-16LA	16-Channel Logic Analyzer, Includes 16-channel Logic analyzer card (GLA-16) and 16 channel Logic analyser probe (GTL-16LA)	GDS-2000A Series
A18	DS2-FGN	DDS Function Generator, 5MHz, sine/square/triangle/pulse function	GDS-2000A Series
A18	DS2-FH1	Module extension bay & USB Type A to Type A/B cable	GDS-2000A Series, AFG-200/100 Series
A18	DS2-GPIB	GPIB Interface	GDS-2000A Series
A18	DS2-LAN	Ethernet & SVGA Output	GDS-2000A Series
A10	DS3-PWR	Power Analysis Software: Power quality/Harmonic/Ripple/In-rush current	GDS-3000 Series
A10	DS3-SBD	Serial Bus Analysis software I2C / SPI / UART (for 4 channel model only)	GDS-3000 Series
F8	GAK-001	Adaptor, 50Ω Termination, N(P/M)	GSP-Series
F8	GAK-002	Adaptor, Cap with Chain, N(P/M)	GSP-Series
F8	GAK-003	Adaptor, 50Ω Termination, BNC(P/M)	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
A32	GAP-001	AC-DC Adaptor	GDS-300/200 Series
F8	GAP-802	Preamplifier, 20dB Preamplifier, 9kHz – 3GHz, N(P/M)	GSP-830
B22	GBK-001	GRF-1300 Experiment Text Book of Teacher Version	GRF-1300
B22	GBK-002	GRF-1300A Experiment Text Book of Teacher Version	GRF-1300A
A32	GCL-001	Vertical Calibration Cable	GDS-3000/200 Series
F7	GCP-005	Current Probe, 40Hz – 1kHz, 5A, Current Probe	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
F7	GCP-020	Current Probe, DC – 100kHz, 10A, Current Probe	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
F7	GCP-100	Current Probe, 40Hz – 10kHz, 20A, Current Probe	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
F7	GCP-1030	Current Probe, DC – 100MHz, 30Arms, Current probe	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
F7	GCP-206P	Current Probe - Power Supply, 2 Channel Power Supply for GCP-530/1030	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
F7	GCP-425P	Current Probe - Power Supply, 4 Channel Power Supply for GCP-530/1030	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
F7	GCP-530	Current Probe, DC – 50MHz, 30Arms, Current Probe	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
A66	GDB-03	Digital Storage Oscilloscope Demo Kit	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series
A67	GDB-02	Digital Storage Oscilloscope Demo Kit	GDS-1000A-U Series, GDS-1000-U Series
E5	GDM-01	Calibration Key	GDM-8261A/8255A/8251A
E5	GDM-SC1	Scanner Card, 16+2 Channel Testing	GDM-8261A/8255A/8251A
F7	GDP-025	Differential Probe, 25M High Voltage Differential Probe	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series
A32	GDP-040D	Differential Probe, 40M High Voltage Differential Probe, Suitable for GDS-300/200	GDS-300/200 Series
F7	GDP-050	Differential Probe, 50M High Voltage Differential Probe	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
F7	GDP-100	Differential Probe, 100M High Voltage Differential Probe	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
D15	GET-001	Extended terminal for 30V/80V/160V models	PSW-Series
D15	GET-002	Extended terminal for 250V/800V models	PSW-Series
E53	GHT-108	H.V. Wiring Lead, 500mm	GSB-01/02
E53	GHT-109	G.B. Wiring Lead, 450mm	GSB-01/02
F11	GHT-113	High Voltage Test Pistol, Approx. 1000m	GPT-Series
E46	GHT-114	High Voltage Test Lead, Clip High Voltage Probe, Approx. 1000mm	GPT-Series
E54	GHT-116B	High Voltage Test Lead, Color Black, 1500mm	GSB-01/02
E54	GHT-116R	High Voltage Test Lead, Color Red, 1500mm	GSB-01/02
F11	GHT-205	High Voltage Test Lead, High Voltage Test Probe	GPT-Series
F8	GKT-001	General Kit Set, Including ADP-002, ATN-100, GTL-303, GSC-002	GSP-Series
F8	GKT-002	CATV Kit Set, Including ADP-001, ADP-101, GTL-304, GSC-003	GSP-Series
F8	GKT-003	RLB Kit Set, Including GAK-001, GAK-002, GTL-302, GSC-004	GSP-Series
F8	GKT-008	EMI Probe Kit Set, Including ANT-04, ANT-05, PR-01, PR-02, ADP-002, GTL-303	GSP-Series
F5	GKT-100	Deskew fixture	GDS-3000 Series
A18	GLA-08	Logic Analyzer Card, 8-Channel Logic Analyzer Card for DS2-8LA	GDS-2000A Series
A18	GLA-16	Logic Analyzer Card, 16-Channel Logic Analyzer Card for DS2-16LA	GDS-2000A Series
E57	GLC-01	Alligator Clips	GLC-9000 Series
E57	GLC-02	Foil Probe	GLC-9000 Series
C22	GPA-501	Power Adapter, DC Output: 5V/2A	AFG-200/100 Series
C22	GPA-502	Universal Power Adapter, DC Output: 5V/2A	AFG-200/100 Series
A32	CPF-700	Protection Films for 7" Touch Screen	GDS-300/200 Series
D58	GPS-001	Knob, Voltage/Current Protection Knob	GPS-x303 Series, SPD-3606
D20	GPW-001	UL/CSA Power Cord, 3000mm	PSU-Series
D20	GPW-002	VDE Power Cord, 3000mm	PSU-Series
D20	GPW-003	PSE Power Cord, 3000mm	PSU-Series
F12	GRA-401	Rack Adapter Kit, 19", 4U Size	GPC-Series, GPR-M Series, PPE-3323, PPS-3635, PPT-Series, PEL-300
F12	GRA-402	Rack Adapter Kit, 19", 4U Size	LCR-800 Series
F12	GRA-403	Rack Adapter Kit, 19", 4U Size	PSH-Series
F12	GRA-404	Rack Adapter Kit, 19", 4U Size	GSP-830, LCR-8000G Series
F12	GRA-407	Rack Adapter Kit, 19", 4U Size	PSM-Series, PST-Series
F13	GRA-408	Rack Adapter Kit, 19", 4U Size	PSS-Series
F13	GRA-409	Rack Adapter Kit, 19", 4U Size	APS-1102A
F13	GRA-410-E	Rack Adapter Kit (EIA), 19", 3U Size	PSW-Series
F13	GRA-410-J	Rack Adapter Kit (JIS), 19", 3U Size	PSW-Series
F13	GRA-411	Rack Adapter Kit, 19", 6U Size	GDS-3000 Series
F14	GRA-413	Rack Adapter Kit (EIA+JIS), 19", 3U Size for PEL-3211	PEL-3000 Series
F14	GRA-414-E	Rack Adapter Kit (EIA), 19", 3U Size for PEL-3021/3041/3111	PEL-3000 Series
F14	GRA-414-J	Rack Adapter Kit (JIS), 19", 3U Size for PEL-3021/3041/3111	PEL-3000 Series
F14	GRA-415	Rack Adapter Kit, 19", 6U Size	GSP-9300
F15	GRA-417	Rack Adapter Kit, 19", 4U Size	GPT-9000 Series
F15	GRA-419-E	Rack Adapter Kit (EIA), 19", 2U Size	PCS-1000
F15	GRA-419-J	Rack Adapter Kit (JIS), 19", 2U Size	PCS-1000
F15	GRA-420	Rack Adapter Kit, 19", 6U Size	GDS-2000A Series

ACCESSORIES

Accessories Index

PAGE	MODEL	DESCRIPTION	APPLICABLE DEVICE
F15	GRA-422	Rack Adapter Kit, 19", 2U Size	GDM-8261A/8255A/8351/834x Series
F16	GRA-423	Rack Adapter Kit, 19", 2U Size	APS-7000 Series
F16	GRA-424	Rack Adapter Kit, 19", 2U Size	PSB-2000 Series
D27	GRJ-1101	Local Bus	PSB-2000 Series
D20	GRM-001	Slide bracket 2pcs / set	PSU-Series
E53	GSB-01	8-CH High Voltage Scanner Box, for GPT-9800/9900/9900A	GPT-9900/9800 Series
E53	GSB-02	6-CH High Voltage and 2-CH Ground Bond Scanner Box, for GPT-9800/9900/9900A	GPT-9900/9800 Series
B15	GSC-001	Soft Carrying Case	GSP-830
A42	GSC-006	Soft carrying case	GDS-1000A-U Series, GDS-1000-U Series
A10	GSC-008	Soft carrying case	GDS-3000 Series, GDS-2000A Series
B5	GSC-009	Soft Carrying Case	GSP-9300
A32	GSC-010	Soft Carrying Case	GDS-300/200 Series
A32	GSC-011	Soft Carrying Bag	GDS-300/200 Series
F16	GTC-001	Instrument Cart, 120V Input Socket, Self Loading 30kg	All Products
F16	GTC-002	Instrument Cart, 120V Input Socket, Self Loading 30kg	All Products
A18	GTL-08LA	Logic Analyzer Probe, 8-Channel Logic Analyzer Probe for DS2-8LA	GDS-2000A Series
F9	GTL-101	Test Lead, BNC (P/M) to Alligator Test Lead, 1100mm	AFG-Series, SFG-Series, GFG-Series, GFC-Series, GVT-Series
F9	GTL-103	Test Lead, Banana to Alligator Test Lead, 1200mm	CAG-800 Series, GAD-201G
F9	GTL-104A	Test Lead, U-type to Alligator Test Lead, Max. Current 10A, 1000mm	PSM/PSP/PSS/PST/GPC/GPD/GPR/GPS/PPT-Series, PPS-3635, SPD-3606
F9	GTL-105A	Test Lead, Alligator to Banana Test Lead, Max. Current 3A, 1000mm	AFG-200/100 Series, PSS/PST/GPC/GPD/GPR/GPS/PPT-Series, PPE-3323, SPD-3606, PCS-GDM-8135/8034
E23	GTL-107A	Test Lead, Banana to Probe Test Lead, 1100mm	GDM-8261A/8255A/8351, GOM-802/801H
E5	GTL-108A	Test Lead, Banana to Kelvin Test Lead, 4W Type, 1100mm	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series, GRS-6000A Series, GOS-Series, GSP-Series, AFG-Series, SFG-Series, GFG-Series, GPT-9900/9800 Series
F9	GTL-110	BNC Cable, BNC (P/M)-BNC (P/M), 1000mm	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series, GRS-6000A Series, GOS-Series, GSP-Series, AFG-Series, SFG-Series, GFG-Series, GPT-9900/9800 Series
F9	GTL-115	Test Lead, U-type to Alligator Test Lead, Approx. 1000mm	GSB-01/02
E53	GTL-116B	G.B. Test Lead, Color Black, 1500mm	GSB-01/02
E53	GTL-116R	G.B. Test Lead, Color Red, 1500mm	GSB-01/02
F9	GTL-117	Test Lead, Banana to Probe Test Lead, 1200mm	PPH-1503, GDM-8245, GDM-400/300 Series
F9	GTL-120	Test Lead, O-type to O-type Test Lead, Max. 40A, 1200mm	PEL-3000 Series, PEL-2000 Series
F9	GTL-121	Sense Lead, O-type to free Lead, 1200mm	PEL-2000 Series
F9	GTL-122	Test Lead, U-type to Alligator Test Lead, Max. Current 40A, 1200mm	PSH-Series, GPR-U Series, GPR-H Series
F10	GTL-123	Test Lead, O-type to O-type Test Lead, 1200mm	PSW-Series, APS-7000 Series
E5	GTL-128J	Extension cable, with J-type connector, Approx. 600mm	GDM-8261A/8255A/8351/834x Series
E5	GTL-128K	Extension cable, with K-type connector, Approx. 600mm	GDM-8261A/8255A/8351/834x Series
E5	GTL-128T	Extension cable, with T-type connector, Approx. 600mm	GDM-8261A/8255A/8351/834x Series
D15	GTL-130	Test leads: 2 x red, 2 x black, for 250V/800V models, 1200mm	PSW-Series
A32	GTL-131	Test Clip, Suitable for GDP-040D	GDS-300/200 Series
A18	GTL-16LA	Logic Analyzer Probe, 16-Channel Logic Analyzer Probe for DS2-16LA	GDS-2000A Series
F10	GTL-201A	Ground Lead, Banana to Banana, European Terminal, 200mm	AFG-200/100 Series, PSM Series, CPD-Series, GPS-x303 Series, SPD-3606
F10	GTL-202	Sense Lead, Banana to Banana Lead, European Terminal, 200mm	PSM-Series
F10	GTL-203A	Test Lead, Banana to Alligator, European Terminal, Max. Current 3A, 1000mm	PSS/PST/GPD/GPS/SPS-Series, SPD-3606, PPH-1503
F10	GTL-204A	Test Lead, Banana to Alligator, European Terminal, Max. Current 10A, 1000mm	PSM/PSP/PSS/GPS/PPT/PST/GPD-Series, SPD-3606
E5	GTL-205	Test Lead, Temperature probe adaptor with thermocouple (K-type), Approx. 1000mm	GDM-8261A/8255A/8351/834x Series
E4	GTL-207	Test Lead, Banana to Probe Test Lead, 800mm	GDS-300/200 Series, GDM-8261A/8255A/8351/834x Series, GDM-400/300 Series, GLC-9000 Series, PCS-1000
E52	GTL-215	Test Lead, U-type to Alligator Test Lead, Approx. 1000mm	GCT-9040
F10	GTL-232	RS-232C Cable, 9-pin, F-F Type, null modem, 2000mm	GDS-3000 Series, GDS-2000A Series, GRS-6000A Series, AFG-3000 Series, GFG-8200 Series, PSH/PSM/PSS/PST-Series, APS-7000 Series, PEL-2000 Series, GDM-8261A/8255A/8351/834x Series, LCR-800 Series, GPT-9900/9800 Series, GLC-9000, GOM-PSP-Series
F10	GTL-232A	RS-232C Cable, 9-pin, F-F Type, null modem, 2000mm	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series, GDB-03/02, GSP-9300, GSP-730, GRF-1300/1300A, AFG-Series, PSU-Series, PSB-2000 Series, PPH-1503, CPD-Series, APS-1102A, APS-7000 Series, PEL-3000 Series, PEL-2000 Series, GDM-8351, GDM-834x Series, GLC-9000, PCS-1000
D64	GTL-234	RS-232C Cable, 9-pin, F-F Type, 2000mm	GDM-8261A/8255A/8351/834x Series, LCR-8000G Series
E53	GTL-235	Communication Cable, 700mm	GSB-01/02
F10	GTL-240	USB Cable, USB 2.0, A-B Type (L Type), 1200mm	GSP-9300, GSP-730, GRF-1300/1300A, PSW-Series, PSU-Series, APS-1102A, APS-7000 Series, GLC-9000, PCS-1000
F10	GTL-246	USB Cable, USB 2.0, A-B Type, 1200mm	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series, GDB-03/02, GSP-9300, GSP-730, GRF-1300/1300A, AFG-Series, PSU-Series, PSB-2000 Series, PPH-1503, CPD-Series, APS-1102A, APS-7000 Series, PEL-3000 Series, PEL-2000 Series, GDM-8351, GDM-834x Series, GLC-9000, PCS-1000
F10	GTL-247	USB Cable, USB 1.1, A-A Type, 1800mm	GDM-8261A/8255A, GPT-9900/9800 Series
F11	GTL-248	GPIB Cable, Double Shielded, 2000mm	GDS-3000 Series, GDS-2000A Series, GSP-9300, GSP-830, AFG-3000 Series, PSB-2000 Series, PPH-1503, PSW/PSU/PSH/PSM/PSS/PST/PPT-Series, PPS-3635, APS-7000 Series, PEL-3000 Series, PEL-2000 Series, GDM-8261A/834x Series, LCR-8000G Series, GPT-9900/9800 Series, GLC-9000, GOM-802, PCS-1000
D86	GTL-249	Frame Link Cable, 300mm	PEL-2000 Series
F11	GTL-250	GPIB Cable, Double Shielded, 600mm	GDS-3000 Series, GDS-2000A Series, GSP-9300, GSP-830, AFG-3000 Series, PSW/PSU/PSH-Series, PSB-2000 Series, APS-7000 Series, GDM-8261A/834x Series, LCR-8000G Series, GPT-9900/9800 Series, GLC-9000, GOM-802, PCS-1000
F11	GTL-251	USB-GPIB Adapter, GPIB-USB-HS, USB 2.0, Hi-Speed USB compliance, 2000mm	GDS-3000 Series, GDS-2000A Series, GSP-9300, GSP-830, AFG-3000 Series, PSB-2000 Series, PPH-1503, PPS-3635, PSW/PSU/PSH/PSM/PSS/PST/PPT-Series, APS-7000 Series, PEL-3000/2000 Series, GDM-8261A/834x Series, LCR-8000G Series, GPT-9900/9800 Series, GLC-9000, GOM-802, PCS-1000
F11	GTL-253	USB Cable, USB 2.0, A-mini B Type, 1400mm	GDS-300/200 Series, GSP-830, USG-Series
D76	GTL-255	Frame Link Cable, 300mm	PEL-3000 Series
F8	GTL-301	RF Cable, RG223 Assembly, 1000mm, N(P/M)	GSP-Series
F8	GTL-302	RF Cable, RG223 Assembly, 300mm, N(P/M)	GSP-Series
F8	GTL-303	RF Cable, RG316 Assembly, 600mm, SMA(P/M)	GSP-Series, GRF-1300/1300A, USG-Series
F8	GTL-304	RF Cable, RG223 Assembly, 280mm, N(P/M) - N(I/F)	GSP-Series
F8	GTL-401	DC Power Cord, DC Power Cord with Lighter Plug, Max. Current 5A	GSP-830
F4	GTP-020A-4	Oscilloscope Probe, 20MHz (10:1/1:1) Switching Passive Probe, BNC(P/M)	GOS-630 & GOS-620, GOS-620FG
F6	GTP-033A	Oscilloscope Probe, 35MHz 1:1 Passive Probe, BNC(P/M)	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series, GRS-6000A Series, GOS-Series
F4	GTP-060A-4	Oscilloscope Probe, 60MHz (10:1/1:1) Switching Passive Probe, BNC(P/M)	GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, 1000-U Series
F4	GTP-070A-4	Oscilloscope Probe, 70MHz (10:1/1:1) Switching Passive Probe, BNC(P/M)	GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, 1000-U Series, GOS-6112/6103/6103C
F4	GTP-100A-4	Oscilloscope Probe, 100MHz (10:1/1:1) Switching Passive Probe, BNC(P/M)	GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, 1000-U Series
F4	GTP-150A-2	Oscilloscope Probe, 150MHz (10:1/1:1) Switching Passive Probe, BNC(P/M)	GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, 1000-U Series
F5	GTP-150A-4	Oscilloscope Probe, 150MHz (10:1/1:1) Switching Passive Probe, BNC(P/M)	GDS-2000E Series
F5	GTP-150B-2	Oscilloscope Probe, 150MHz (10:1/1:1) Switching Passive Probe, BNC(P/M)	GDS-300/200 Series
F5	GTP-151R	Oscilloscope Probe, 150MHz 10:1 Passive Probe, BNC(P/M)</	

Accessories Index

PAGE	MODEL	DESCRIPTION	APPLICABLE DEVICE
F6	GTP-350A-2	Oscilloscope Probe, 350MHz (10:1/1:1) Switching Passive Probe, BNC(P/M)	GDS-2000A Series, GDS-2000E Series
F6	GTP-351R	Oscilloscope Probe, 350MHz 10:1 Passive Probe, BNC(P/M)	GDS-3000 Series
F6	GTP-352R	Oscilloscope Probe, 350MHz 20:1 Passive Probe, BNC(P/M)	GDS-3000 Series
F6	GTP-501R	Oscilloscope Probe, 500MHz 10:1 Passive Probe, BNC(P/M)	GDS-3000 Series
A10	CUG-001	GPIB-USB Adaptor, GPIB to USB adaptor	GDS-3000 Series, PSW-Series
A31	GWS-001	Wrist Strap	GDS-300/200 Series
E34	LCR-05	Test Fixture, 4 Wire	LCR-8000G Series, LCR-800 Series
E34	LCR-06A	Test Fixture, 4 Wire, Kelvin Clip	LCR-8000G Series, LCR-800 Series
E34	LCR-07	Test Fixture, 2 Wire, Alligator Clip	LCR-8000G Series, LCR-800 Series
E34	LCR-08	Test Fixture, 4 Wire, SMD/Clip tweezers	LCR-8000G Series, LCR-800 Series
E34	LCR-09	Test Fixture, 4 Wire, SMD/Chip test fixture	LCR-8000G Series, LCR-800 Series
E34	LCR-12	Test Fixture, 4Wire, Kelvin Clip	LCR-8000G Series
E34	LCR-13	Test Fixture, 4 Wire, SMD/Chip test fixture	LCR-8000G Series, LCR-800 Series
E66	PCS-001	Basic Accessory Kit	PCS-1000
D86	PEL-001	GPIB Card	PEL-2000 Series
F16	PEL-002	Rack Mount Kit, PEL-2000 Series Rack Mount Kit	PEL-2000 Series
D86	PEL-003	Panel Cover	PEL-2000 Series
D78	PEL-004	GPIB Card	PEL-3000 Series
D78	PEL-010	Dust filter	PEL-3000 Series
D27	PSB-001	GPIB Card	PSB-2000 Series
D27	PSB-003	Parallel connection kit (for horizontal installation), Kit includes: (PSB-007 Joint Kit, Horizontal bus bar x 2, PSB-005 x1)	PSB-2000 Series
D27	PSB-004	Parallel connection kit (for vertical installation) Kit includes: (PSB-007 Joint Kit, Vertical bus bar x 2, PSB-005 x 1)	PSB-2000 Series
D27	PSB-005	Parallel Connection Signal Cable	PSB-2000 Series
D27	PSB-006	Serial Connection Signal Cable	PSB-2000 Series
D27	PSB-007	Joint Kit: Includes 4 joining plates, [M3x6]screws x 4; [M3x8]screw x 2	PSB-2000 Series
D27	PSB-008	RS232C Cable (PSB-2000 Only)	PSB-2000 Series
D20	PSU-01B	Bus Bar for 2 units in parallel operation	PSU-Series
D20	PSU-01C	Cable for 2 units in parallel operation	PSU-Series
D20	PSU-02B	Bus Bar for 3 units in parallel operation	PSU-Series
D20	PSU-02C	Cable for 3 units in parallel operation	PSU-Series
D20	PSU-03B	Bus Bar for 4 units in parallel operation	PSU-Series
D20	PSU-03C	Cable for 4 units in parallel operation	PSU-Series
D20	PSU-232	RS232 Cable with DB9 connector kit	PSU-Series
D20	PSU-485	RS485 Cable with DB9 connector kit	PSU-Series
D20	PSU-GPIB	PSU GPIB Interface Card (Factory Installed)	PSU-Series
D20	PSU-ISO-I	Isolated Current Remote Control Card (Factory Installed)	PSU-Series
D20	PSU-ISO-V	Isolated Voltage Remote Control Card (Factory Installed)	PSU-Series
D15	PSW-001	Accessory Kits	PSW-Series
D15	PSW-002	Simple IDC Tool	PSW-Series
D15	PSW-003	Contact Removal Tool	PSW-Series
D15	PSW-004	Basic Accessory Kit for 30V/80V/160V models	PSW-Series
D15	PSW-005	Series Operation Cable for 2 units. (30V/80V/160V models moly)	PSW-Series
D15	PSW-006	Parallel Operation Cable for 2 units.	PSW-Series
D15	PSW-007	Parallel Operation Cable for 3 units.	PSW-Series
D15	PSW-008	Basic Accessory Kit for 250V/800V models	PSW-Series
D14	PSW-009	Output terminal cover for 30V/80V/160V models	PSW-Series
D14	PSW-010	Large filter (Type II/III)	PSW-Series
D14	PSW-011	Output terminal cover for 250V/800V models	PSW-Series
D14	PSW-012	High voltage output terminal for 250V/800V model	PSW-Series
E63	PT-100	Temperature Probe, Temperature Sensor	GOM-802
B8	PWS-06	RF Power Meter, 6.2GHz RF Power Meter, USB DC input, N(I)/F	GSP-9300
F8	RLB-001	Return Loss Bride, 10MHz - 1GHz, Source/Load: N(I)/F, Coupling: N(P/M)	GSP-9300/830/810

Accessories

GTP-020A-4

For : GOS-620/620FG, GOS-630



The GTP-020A-4 is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MΩ shunted by 30pF. However, it may be compensated for use with instruments having an input capacitance of 25-45pF. The probe incorporates a two position slide switch in the head which selects attenuation of x1, x10 position.

Item	10:1	1:1
Bandwidth	DC-20MHz(±3dB)	DC-6MHz(±3dB)
Input R	~10MΩ	1MΩ (Oscilloscope)
Input C	~30pF	~170pF
Att. Ratio	1/10	1/1
Max. Input Voltage	< 600Vpk	< 200Vpk
Accessories	1.Pincher tip 2.Ground lead 3.Cable Marker 4.Screw driver 5. IC top	

GTP-060A-4

For: GOS-Series, GRS-6000A Series



GTP-060A-4 is a x1, x10 attenuator modular probe. Designed for use with DC to 60MHz oscilloscope with input impedance of 1MΩ The probe consists of following separate units;
1. BNC male connector and compensation box.
2. Probe body probe tip and R.C. assemblies.
3. Approx. 1.2M cable

Item	10:1	1:1
Bandwidth	DC-60MHz(±3dB)	DC-6MHz(±3dB)
Input R	~10MΩ	1MΩ (Oscilloscope)
Input C	~30pF	~200pF
Att. Ratio	1/10	1/1
Max. Input Voltage	<300Vpk	<150Vpk
Accessories	1.Pincher tip 2.Ground lead 3.Cable Marker 4.Screw driver 5. IC	

GTP-070A-4

For: GDS-1052-U/1072-U/1072A-U, GDS-2072A/2074A, GDS-2072E/2074E



GTP-070A-4 is a x1, x10 attenuator modular probe. Designed for use with DC to 70MHz oscilloscope with input impedance of 1MΩ The probe consists of following separate units;
1. BNC male connector and compensation box.
2. Probe body probe tip and R.C. assemblies.
3. Approx. 1.2M cable

Item	10:1	1:1
Bandwidth	DC-70MHz(±3dB)	DC-6MHz(±3dB)
Input R	~10MΩ	1MΩ (Oscilloscope)
Input C	~32pF	~200pF
Att. Ratio	1/10	1/1
Max. Input Voltage	≤600Vpk	≤200Vpk
Accessories	1.Pincher tip 2.Ground lead 3.Cable Marker 4.Screw driver 5. IC	

GTP-100A-4

For: GDS-2102A/2104A, GDS-2102E/2104E, GOS-6103/6103C/6112




The GTP-100A-4 is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MΩ shunted by 20pF. However, it may be compensated for use with instruments having an input capacitance of 10-35pF. The probe incorporates a two position slide switch in the head which selects attenuation of x1, x10 position.

Item	10:1	1:1
Bandwidth	DC-100MHz(±3dB)	DC-6MHz(±3dB)
Input R	~10MΩ	1MΩ (Oscilloscope)
Input C	~17pF	~47pF
Att. Ratio	1/10	1/1
Max. Input Voltage	DC 500V CAT I, 300V CAT II	DC 300V CAT I, 150V CAT II
Accessories	1.Channel identifier clip 2.hook 3.Ground lead 4. Insulating tip 5.IC tip 6.Adjusting tool 7.earth tip	

GTP-150A-2

For: GDS-1152A-U, GDS-2102A/2104A

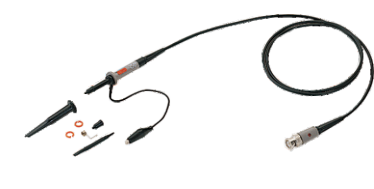

The GTP-150A-2 is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MΩ shunted by 20pF. However, it may be compensated for use with instruments having an input capacitance of 10-35pF. The probe incorporates a two position slide switch in the head which selects attenuation of x1, x10 position.

Item	10:1	1:1
Bandwidth	DC-150MHz(±3dB)	DC-6MHz(±3dB)
Input R	~10MΩ	1MΩ (Oscilloscope)
Input C	~17pF	~47pF
Att. Ratio	1/10	1/1
Max. Input Voltage	500V CAT I, 300CAT II	300V CAT I, 150CAT II
Accessories	1.Channel identifier clip 2.hook 3.Ground lead 4. Insulating tip 5.IC tip 6.Adjusting tool 7.earth tip	

GTP-150B-2

For: GDS-300/200 Series



The GTP-150B-2 is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MΩ shunted by 20pF. However, it may be compensated for use with instruments having an input capacitance of 10-35pF. The probe incorporates a two position slide switch in the head which selects attenuation of x1, x10 position.

Item	10:1	1:1
Bandwidth	DC-150MHz(±3dB)	DC-6MHz(±3dB)
Input R	~10MΩ	1MΩ (Oscilloscope)
Input C	~17pF	~47pF
Att. Ratio	1/10	1/1
Max. Input Voltage	500V CAT I, 300CAT II	300V CAT I, 150CAT II
Accessories	1.Channel identifier clip 2.hook 3.Ground lead 4. Insulating tip 5.IC tip 6.Adjusting tool 7.earth tip	

Ordering Guide

If an accessory is ordered separately from the main product, please indicate the nomenclature of the accessory when placing order.

Example : GSC-006 Soft Carrying Case for GDS-1000A-U Series

If an accessory is ordered along with the main product, please indicate the option number of the accessory when placing order.

Example : GDS-3352 350MHz, 2-Channel, Visual Persistence DSO , GSC-008 Soft Carrying Case



Accessories

Accessories

GTP-150A-4

For: GDS-2102E/2104E Series



The GTP-150A-4 is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MΩ shunted by 20pF. However, it may be compensated for use with instruments having an input capacitance of 10–35pF. Connect this sentence to the end of the previous sentence.

Item	10:1	1:1
Bandwidth	DC~150MHz(±3dB)	DC~10MHz(±3dB)
Input R	~10MΩ	1MΩ (Oscilloscope)
Input C	8.5~18.5pF	45~65pF
Att. Ratio	1/10	1/1
Max. Input Voltage	600V CAT II	200V CAT II
Accessories	1.Channel identifier clip 2.hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.earth tip	

GTP-200A-4

For: GDS-Series




The GTP-200A-4 is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MΩ shunted by 20pF. However, it may be compensated for use with instruments having an input capacitance of 10–35pF. The probe incorporates a two position slide switch in the head which selects attenuation of x1, x10 position.

Item	10:1	1:1
Bandwidth	DC~100MHz(±3dB)	DC~6MHz(±3dB)
Input R	~10MΩ	1MΩ (Oscilloscope)
Input C	~17pF	~47pF
Att. Ratio	1/10	1/1
Max. Input Voltage	DC 500V CAT I, 300V CAT II	DC 300V CAT I, 150V CAT II
Accessories	1.Channel identifier clip 2.hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.earth tip	

GTP-251R

For: GDS-3000 Series

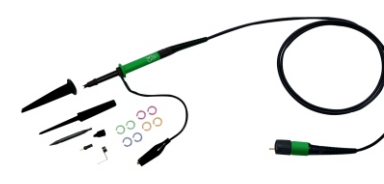

The GTP-251R is compatible with readout function oscilloscopes that automatically detect and display the attenuation factor of the probe.

Item	10:1
Bandwidth	DC~250MHz(±3dB)
Input R	~10MΩ
Input C	~12pF
Att. Ratio	1/10
Max. Input Voltage	DC 500V CAT I, 300V CAT II
Accessories	1.Channel identifier clip 2.Sprung hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.Measuring tip 8. Sprung earth tip

GTP-351R/352R

For: GDS-3000 Series



Both GTP-351R and GTP-352R are passive high impedance oscilloscope probes designed and calibrated for use on instrument. GTP-351R has an input impedance of 1 MΩ shunted by 20pF while GTP-352R has an input impedance of 1 MΩ shunted by 15pF. However, GTP-351R may be compensated for use with instruments having an input capacitance of 10–35pF while GTP-352R has an input impedance of 10–30pF.

Item	GTP-351R	GTP-352R
Bandwidth	DC~350MHz	DC~350MHz
Input R	~10MΩ	~10MΩ
Input C	~12pF	~7pF
Att. Ratio	1/10	1/20
Max. Input Voltage	500V CAT I, 300CAT II	1kV CAT II
Accessories	1.Channel identifier clip 2.Sprung hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.Measuring tip 8. Sprung earth tip	

GTP-250A-2

For: GDS-2202A/2204A



The GTP-250A-2 is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MW shunted by 20pF. However, it may be compensated for use with instruments having an input capacitance of 10–35pF. Connect this sentence to the end of the previous sentence.

Item	10:1	1:1
Bandwidth	DC~250MHz(±3dB)	DC~6MHz(±3dB)
Input R	~10MΩ	1MΩ (Oscilloscope)
Input C	~17pF	~47pF
Att. Ratio	1/10	1/1
Max. Input Voltage	500V CAT I, 300CAT II	300V CAT I, 150CAT II
Accessories	1.Channel identifier clip 2.hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.earth tip	

GTP-151R

For: GDS-3000 Series



The GTP-151R is compatible with readout function oscilloscopes that automatically detect and display the attenuation factor of the probe.

Item	10:1
Bandwidth	DC~150MHz(±3dB)
Input R	~10MΩ
Input C	~12pF
Att. Ratio	1/10
Max. Input Voltage	< 500 Vpk
Accessories	1.Channel identifier clip 2.Sprung hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.Measuring tip 8. Sprung earth tip

GTP-501R

For: GDS-3000 Series
GDS-2000A Series



The GTP-501R is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MW shunted by 13pF. However, it may be compensated for use with instruments having an input capacitance of 8–20pF. Connect this sentence to the end of the previous sentence.

Item	10:1
Bandwidth	DC~500MHz
Input R	~10MΩ
Input C	~11.5pF
Att. Ratio	1/10
Max. Input Voltage	500V CAT I, 300V CAT II
Accessories	1.Channel identifier clip 2.Sprung hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.Measuring tip 8. Sprung earth tip

GTP-033A

For: GDS-3000 Series



GTP-033A is a x 1, attenuator modular probe. Designed for use with DC to 35MHz oscilloscope with input impedance of 1MΩ The probe consists of following separate units; 1. BNC male connector and compensation box. 2. Approx. 1.2M cable

Item	1:1
Bandwidth	DC~35MHz(±3dB)
Input R	1MΩ (Oscilloscope)
Input C	~83pF
Att. Ratio	1/1
Max. Input Voltage	<300 CAT I
Accessories	1.Channel Identifier Clip 2.Sprung Hook 3.Ground Lead 4.Insulating Tip 5. IC Tip

GTP-250B-2

For: GDS-300/200 Serie



The GTP-250B-2 is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MW shunted by 20pF. However, it may be compensated for use with instruments having an input capacitance of 10–35pF. Connect this sentence to the end of the previous sentence.

Item	10:1	1:1
Bandwidth	DC~250MHz(±3dB)	DC~6MHz(±3dB)
Input R	~10MΩ	1MΩ (Oscilloscope)
Input C	~17pF	~47pF
Att. Ratio	1/10	1/1
Max. Input Voltage	500V CAT I, 300CAT II	300V CAT I, 150CAT II
Accessories	1.Channel identifier clip 2.hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.earth tip	

GTP-300A-4

For: GDS-2202E/2204E Series



The GTP-300A-4 is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MΩ shunted by 20pF. However, it may be compensated for use with instruments having an input capacitance of 10–35pF. The probe incorporates a two position slide switch in the head which selects attenuation of x1, x10 position.

Item	10:1	1:1
Bandwidth	DC~300MHz(±3dB)	DC~10MHz(±3dB)
Input R	~10MΩ	1MΩ (Oscilloscope)
Input C	8.5~18.5pF	45~65pF
Att. Ratio	1/10	1/1
Max. Input Voltage	600V CAT II	200V CAT II
Accessories	1.Channel identifier clip 2.hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.earth tip	

GTP-350A-2

For: GDS-3000 Series
GDS-2302A/2304A



The GTP-352A-2 is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MΩ shunted by 15pF. However, it may be compensated for use with instruments having an input capacitance of 10–30pF. Connect this sentence to the end of the previous sentence.

Item	10:1	1:1
Bandwidth	DC~350MHz	DC~6MHz
Input R	~10MΩ	~1MΩ
Input C	~13pF	~46pF
Att. Ratio	1/10	1/1
Max. Input Voltage	500V CAT I, 300VAC II	300V CAT I, 150VAC II
Accessories	1.Channel identifier clip 2.Sprung hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.Measuring tip 8. Sprung earth tip	

GKT-100 Deskew Fixture


The GKT-100 deskew fixture is used to compensate for the propagation delay between a passive voltage probe and current probe. It is used with the GDS-3000 Series, Required tools.

- 1.GDS-3000 x 1
- 2.GKT-100 x 1
- 3.USB type A-B cable x1 -used for deskew fixture
- 4.Standard passive probe x1
- 5.Current probe x1 (GCP-530 or GCP-1030)



Accessories

Current Probe and Differential Probe Selections



GCP-005/100/020



GCP-530/1030 & GCP-206P/425P



GDP-025



GDP-050/100

In addition to the standard passive probes, the optional current or differential probes can be used to perform additional tests or power analysis. The differential probes come in three bandwidths: 25MHz, 50MHz and 100MHz. The current probes come in a broad variety of bandwidth and current ranges (ranging from 50MHz/30A, 100MHz/30A, 10kHz/200A and 100kHz/100A), to cover any number of power supply testing applications.

* The GCP-530/1030 must be used in conjunction with the GCP-206P/425P current probe power supply.

* The GCP-100 requires a standard 9V battery; The GCP-005 and GCP-020 do not require batteries or a power supply source.

CURRENT PROBE						CURRENT PROBE POWER SUPPLY	
	GCP-005	GCP-100	GCP-020	GCP-530	GCP-1030	GCP-206P	GCP-425P
Probe Bandwidth	40Hz~1kHz	DC~100kHz	40Hz~40kHz	DC~50MHz	DC~100MHz	GCP-530	GCP-530
Rise Time	—	—	—	7ns or less	3.5ns or less	GCP-1030	GCP-1030
Maximum Continuous Input Range	5A	0.05-10A(100mV/A) 1-100A(10mV/A)	0.1-24A(100mV/A) 0.5-240A(10mV/A)	30Arms	30Arms	2	4
Maximum Peak Current Value	50A	100A	60A(100mV/A) 600A(10mV/A)	50Arms	50Arms	±12V±0.5V	±12V±0.5V
Output Voltage Rate	10mV/A	100mV/A;10mV/A	10mV/A;100mV/A	0.1V/A	0.1V/A	±600mA	±2.5A
Amplitude Accuracy	±0.5%rdg ±0.1mV (50/60Hz) ±1.0%rdg ±0.2mV (40-1kHz)	≤3%±5mV (50mA-10A peak) ≤4%±500µV (0.5A-40A peak) ≤15%(40-100A peak)	≤2%±50mV (100mA-20A peak) ≤3.5%±5mV (0.5-10A peak) ≤3%±5mV (10-40A peak) ≤1.5%±5mV (100A-240A peak)	±1.0%rdg±1mV (0-30Arms/DC, 45-66Hz);±2.0%rdg (30Arms-50A peak /DC, 45-66Hz)	±1.0%rdg±1mV (0-30Arms/DC, 45-66Hz);±2.0%rdg (30Arms-50A peak /DC, 45-66Hz)	110V/120V, 220V/240V AC±10%	100V~240V AC±10%
Noise	—	—	—	2.5mArms or less	2.5mArms or less	20VA	170VA
Rate Supply Voltage	—	—	—	±12V±0.5V	±12V±0.5V	73(W)x110(H)x 186(D)mm ; Approx.1.1kg	80(W)x119(H)x 200(D)mm ; Approx.1.1kg
Maximum Rated Power	—	—	—	5.6VA	5.3VA	Accessories	
Maximum Rated Voltage	600V, CAT III	600V, CAT III	600V, CAT III	300V, CAT I	300V, CAT I	Power cord, fuse	Power cord, fuse

HIGH-VOLTAGE DIFFERENTIAL PROBE			
	GDP-025	GDP-050	GDP-100
Probe Bandwidth	DC ~ 25MHz(attenuationx50, x200) ; DC ~ 15MHz(attenuationx20)	DC ~ 50MHz(attenuationx200, x500, x1000) ; DC ~ 25MHz(attenuationx100)	DC ~ 100MHz(attenuationx200, x500, x1000) ; DC ~ 50MHz(attenuationx100)
Attenuation	x20, x50, x200	x100, x200, x500, x1000	x100, x200, x500, x1000
Accuracy	±2%	±2%	±2%
Voltage Input Range (DC+AC peak to peak)	≤140Vp-p for x 20, ≤350Vp-p for x 50, ≤1400Vp-p for x 200	≤700Vp-p for x 100 ≤1400Vp-p for x 200 ≤3500Vp-p for x 500 ≤7000Vp-p for x 1000	≤700Vp-p for x 100 ≤1400Vp-p for x 200 ≤3500Vp-p for x 500 ≤7000Vp-p for x 1000
Permitted Max Input Voltage	Maximum differential voltage: Max voltage between input terminal and ground: 600Vrms	Maximum differential voltage: Max voltage between input terminal and ground: 6500Vrms	Maximum differential voltage: Max voltage between input terminal and ground: 6500Vrms
Input Impedance	Differential:4MΩ/1.2pF ; Between terminals and ground:27MΩ/2.3pF	Differential:54MΩ/1.2pF ; Between terminals and ground:27MΩ/2.3pF	Differential: 54MΩ/1.2pF ; Between terminals and ground: 27MΩ/2.3pF
Output	≤7.0V	≤7.0V	≤7.0V
Output impedance	50Ω	50Ω	50Ω
Rise Time	14ns (x50, x200 attenuation) ; 23.4ns (x20 attenuation)	7ns (x200, x500, x1000 attenuation) ; 14ns (x100 attenuation)	3.5ns (x200, x500, x1000 attenuation) ; 7ns (x100 attenuation)
Rejection Rate on Common Mode (CMRR)	60Hz>80dB, 100Hz>60dB, 1MHz>50dB	60Hz>80dB, 100Hz>60dB, 1MHz>50dB	60Hz>80dB, 100Hz>60dB, 1MHz>50dB
Power Supply	External DC adapter	External DC adapter	External DC adapter
Consumption	Maximum 35mA (0.4Watt)	Maximum 35mA (0.4Watt)	Maximum 35mA (0.4Watt)

Accessories

GAP-802 Preamp

Preamp with 20dB(Typical 9kHz ~ 3GHz)
For: GSP-830



Parameter	Term	Minimum	Typical	Maximum	Unit
Frequency Range	f ₀	0.009	---	3	GHz
Gain	G _p	15	20	---	dB
Output 1dB-Compression Point	P _{1dB}	+13.4	+16.4	---	dBm
Standing Wave Ratio	SWR	< 2:1	---	<1.2:1	---
3rd Order Intercept Point	IP ₃	+24	+30	---	dBm
Noise Figure	NF	---	3.5	3.7	dB
Device Current	I _c	76	80	85	mA

RLB-001

Return Loss Bridge
10MHz ~ 1GHz
For: GSP-Series



Frequency Range	10MHz ~ 1GHz
Directivity	10MHz ~ 100MHz : >48dB ; 100MHz ~ 1000MHz : >38dB
Insertion Loss	Source to Load : <10dB ; Load to Coupler : <6dB
Return Loss	Source Return Loss : >7dB ; Load Return Loss : >11dB Coupler Return Loss : >17dB
Characteristic Impedance	50 Ohm
Connector	N Type ; Source and Load : Female ; Coupler : Male
Dimension & Weight	88 x 54 x 32 (mm) , 230 g

GKT-008 EMI Probe Kit Set

ADP-002 : Adaptor SMA(I/F) ~ N (P/M) x 1
GTL-303 : RF Cable SMA(P/M) ~ SMA(P/M) x 1
PR-01 : AC Voltage Probe x 1
PR-02 : Touch Passive RF Probe x 1
ANT-04 : H-field Probe x 1
ANT-05 : H-field Probe x 1
For: GSP-Series



GKT-001 General Kit Set

ADP-002
ATN-100
GTL-303
GSC-002
For:GSP-Series



GKT-002 CATV Kit Set

ADP-001
ADP-101
GTL-304
GSC-003
For:GSP-Series



GKT-003 RLB Kit Set

GAK-001
GAK-002
GTL-302
GSC-004
For:GSP-Series



ADP-001

Adaptor
BNC(I/F)~N(P/M)
For:GSP-Series



ADP-002

Adaptor
SMA(I/F)~N(P/M)
For:GSP-Series



GAK-001

Termination 50Ω
N (P/M)
For:GSP-Series



GAK-002

Cap with Chain
N (P/M)
For:GSP-Series



ADB-002

DC Block BNC 50Ω 10MHz~2.2GHz
For: GSP-9300



ADB-006

DC Block N-TYPE 50Ω 10MHz~6GHz
For: GSP-9300



ADB-008

DC Block SMA 50Ω 0.1MHz~8GHz
For: GSP-9300



GAK-003

50Ω Impedance Adaptor
For:GDS-Series,
GSP-Series



ADP-101

BNC(I/F) 75Ω ~
BNC(P/M) 50Ω
For:GSP-Series
(An additional ADP-001 is needed
for fitting GSP spectrum analyzers)



ATN-100

10dB Attenuator
N(I/F) ~ N(P/M)
For:GSP-Series



GTL-401

DC Power Cord with DC Jack
and Lighter Plug, Current 5A
For: GSP-830



ATA-001

BNC Antenna
For:GSP-Series
(An additional ADP-001 is needed
for fitting GSP spectrum analyzers)



GTL-301

RF Cable (RG 223
N(P/M) ,
1000mm)
For:GSP-Series




GTL-302

RF Cable Assembly
(RG223, N(P/M),
300mm)
For:GSP-Series



GTL-303

RF Cable Assembly
(SMA(P/M),RG316,
600mm)
For: GSP-Series,
USG-Series
(An additional ADP-002
is needed for fitting GSP
spectrum analyzers)













GTL-304

RF Cable Assembly
(Rg223, N(P/M)
~N(I/F),280mm)
For: GSP-Series




Accessories
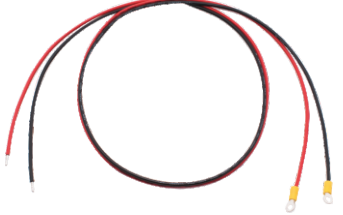
<p>GTL-101 Approx. 1100mm For: GOS-620FG, GVT-427B/417B, SFG-2000 Series, SFG-1000 Series, GFG-8000 Series, GFC-8000 Series, AFG-Series</p> 	<p>GTL-103 Approx. 1200mm For: GAG-809/810, GAD-201G</p> 
<p>GTL-104A Approx. 1000mm ; Max. Current 10A For: PSP-Series, PST-Series, PSS-Series, PSM-Series, GPR-U/H/M Series, GPS-Series, GPC-Series</p> 	<p>GTL-105A Approx. 1000mm ; MAX Current 3A For: GPR-U/H/M Series, GPC-Series, GPS-Series, PPE-Series, PPS-Series, PPT-Series, PSS-Series, PST-Series</p> 
<p>GTL-110 Approx. 1000mm For: GDS-2000 Series, GOS-Series, GDS-1000-U/1000A-U Series, GRS-Series, GFC-8131H/8270H, GSP-Series, SFG-Series, AFG-Series</p> 	<p>GTL-115 Approx. 1000mm For: GPT-9904/9804</p> 
<p>GTL-117 Approx. 1200mm For: GDM-8245</p> 	<p>GTL-120 Approx. 1200mm, MAX. Current 40A For: PEL-3000 Series, PEL-2000 Series</p> 
<p>GTL-121 Approx. 1200mm, Voltage sense lead For: PEL-2000 Series</p> 	<p>GTL-122 Approx. 1200mm, MAX. Current 40A For: PSH-Series, GPR-U Series, GPR-H Series</p> 


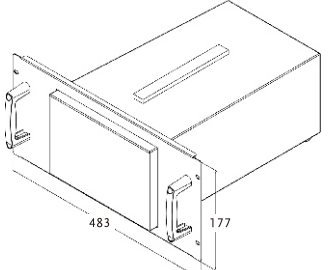

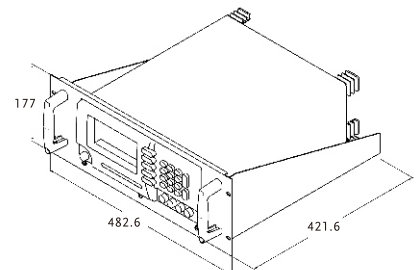

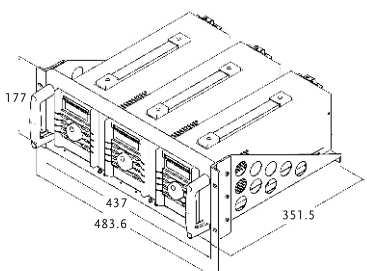
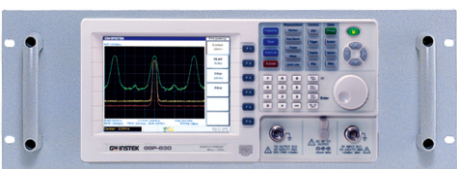
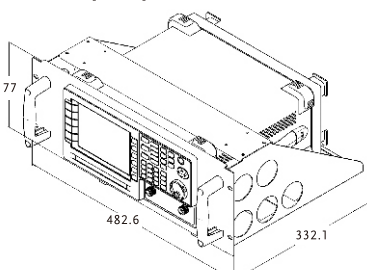

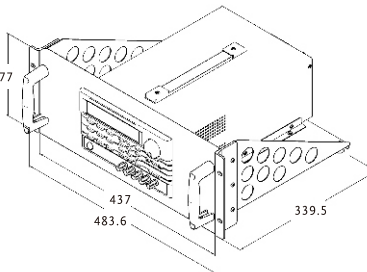
Accessories

<p>GTL-123 Test Lead Approx. 1200mm , MAX. Current 40A For: PSW-Series</p> 	<p>GTL-202 Sense Lead (European Terminal) Approx. 200mm For: PSM-Series</p> 
<p>GTL-201A Ground Lead (European Terminal) Approx. 200mm For: GPS-2303/3303/4303, PSM-Series, GPS-3030/3030D/3030DD, AFG-225P/125P</p> 	<p>GTL-203A (European Terminal) Approx. 1000mm , MAX. Current 3A For: PSS-Series, PST-Series, SPS-Series</p> 
<p>GTL-232 RS-232C Cable Approx. 2000mm For: GDS-2000 Series, GRS-6032A/6052A, LCR-800 Series, PSM-2010/3004/6003, GOM-802, GDM-8261A, GDM-8255A, GDM-8351, GPT-9900/9800 Series</p> 	<p>GTL-204A (European Terminal) Approx. 1000mm , MAX. Current 10A For: GPC-Series, GPS-Series, PPE-Series, PPS-Series, PPT-Series, PSM-Series, PSP-Series, PST-Series,</p> 
<p>GTL-232A RS-232C Cable Approx. 2000mm For: PSP-603/405/2010</p> 	<p>GTL-240 USB Cable Approx. 1200mm USB 2.0 Type A-Type B Cable , 4P, Type B as " L " Format For: PSW-Series</p> 
<p>GTL-246 USB Cable Approx. 1200mm USB 2.0 Type A-Type B Cable, 4P For: GDS-3000/2000 Series, GDS-1000A-U/1000-U Series, GLA-1000 Series, AFG-3000/2000 Series, GPD-2303S/3303S/4303S/3303D, GLC-9000, PPH-Series, GDM-8342/8341, GDM-8351, GSP-930, GSP-730, GRF-1300/1300A</p> 	<p>GTL-247 USB Cable Approx. 1800mm , A-A type cable For: GDM-8261A, GDM-8255A, GPT-9900/9800 Series</p> 

Accessories

<p>GTL-248 GPIB Cable (2.0m) Approx. 2000mm For: GDS-2000 Series, GSP-830, AFG-3000 Series, PPH-Series, PS-3635, PPT-1830, PST-3201/3202, PPS-2005/3203, PSM-Series, PSH-A Series, PEL-2000 Series, GDM-8261A, GOM-802, LCR-8000G Series, GPT-9900/9800 Series, GDM-8342</p> 	<p>GTL-250 GPIB Cable Approx. 600mm For: GDS-2000 Series, GSP-830, AFG-3000 Series, PPS-3635, PPT-1830, PST-3201/3202, PPS-2005/3203, PSM-Series, PSH-A Series, PEL-2000 Series, GDM-8261A, GOM-802, LCR-8000G Series, GPT-9900/9800 Series, GDM-8342</p> 
<p>GTL-251 GPIB-USB-HS (High Speed) For: GDS-Series, GSP-830, AFG-3000 Series, PPH-Series, PPS-3635, PPT-1830, PST-3201/3202, PPS-2005/3203, PSM-Series, PSH-A Series, PEL-2000 Series, GDM-8261A, GOM-802, LCR-8000G Series, GPT-9900/9800 Series, GDM-8342</p> 	<p>GTL-253 Mini USB Cable Approx. 1300mm USB Cable 2.0 A-B(mini) For: GDS-300/200 Series, USG-Series, GSP-830, LCR-916/915</p> 
<p>GHT-205 High Voltage Test Probe Approx. 1000mm For: GPT-9900/9800/9600 Series</p> 	<p>GHT-113 High Voltage Test Pistol Approx. 2000mm For: GPT-9900/9800/9600 Series</p> 
<p>GTL-108A 4W Type Test Lead Approx. 1.1m For: GOM-801H/802, GDM-8261A, GDM-8255A, GDM-8351</p> 	<p>GTL-107A Test Lead Approx. 1.1m For: GDM-8034, GDM-8135</p> 
<p>GHT-114 Clip High Voltage Probe Approx. 1m For: GPT-9900/9800/9600 Series</p> 	

Accessories

<p>GRA-401 Rack Adapter Kit Rack Mounting (19", 4U) , For: PPE/PPS/PPT/PEL/GPC/GPR-M Series</p> 	<p>GRA-401 Rack Dimension (mm)</p> 
<p>GRA-402 Rack Adapter Kit Rack Mounting (19", 4U) , For: LCR-800 Series</p> 	<p>GRA-402 Rack Dimension (mm)</p> 
<p>GRA-403 Rack Adapter Kit Rack Mounting (19", 4U) , For: PSH-Series</p> 	<p>GRA-403 Rack Dimension (mm)</p> 
<p>GRA-404 Rack Adapter Kit Rack Mounting (19", 4U) , For: GSP-830, LCR-8000G</p> 	<p>GRA-404 Rack Dimension (mm)</p> 
<p>GRA-407 Rack Adapter Kit Rack Mounting (19", 4U) , For: PSM-Series, PST-Series</p> 	<p>GRA-407 Rack Dimension (mm)</p> 


Accessories

GRA-408 Rack Adapter Kit

Rack Mounting (19", 4U) , For : PSS-Series




GRA-408 Rack Dimension (mm)

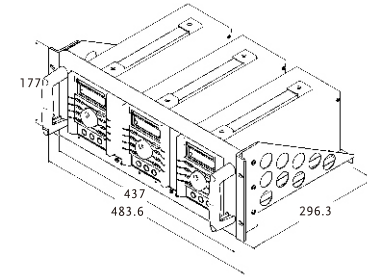


GRA-409 Rack Adapter Kit

For : APS-1102A

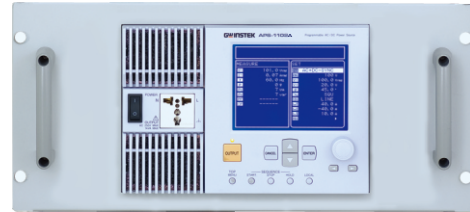

GRA-409 Rack Dimension (mm)

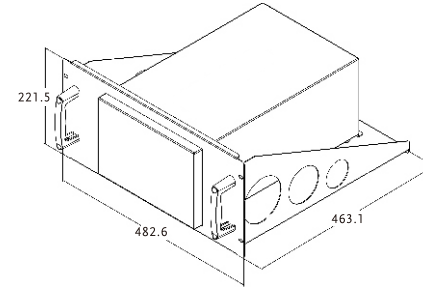


GRA-410-J Rack Mount Kit (JIS)

For : PSW-Series



GRA-410-J Rack Dimension (mm)

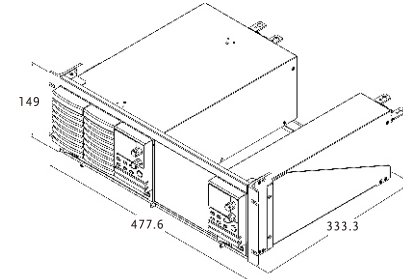


GRA-410-E Rack Mount Kit (EIA)

For : PSW-Series




GRA-410-E Rack Dimension (mm)

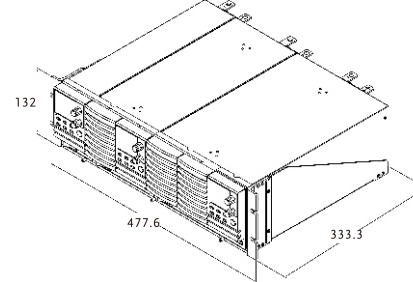


GRA-411 Rack Adapter Kit

Rack Mounting (19", 6U) , For : GDS-3000 Series

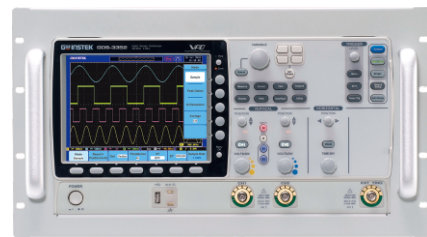

GRA-411 Rack Dimension (mm)





Accessories

GRA-413 JIS+EIA Rack Mount Kit

For : PEL-3211



GRA-413 JIS+EIA Rack Dimension (mm)

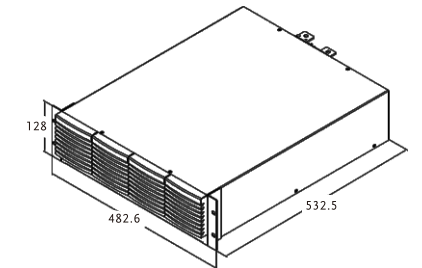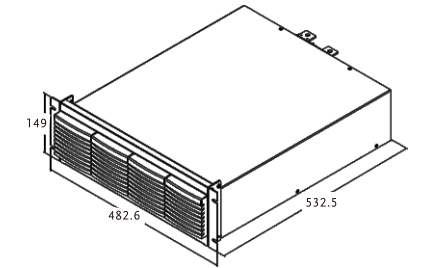


GRA-414-J Rack Mount Kit (JIS)

For : PEL-3021/3041/3111



GRA-414-J Rack Dimension (mm)

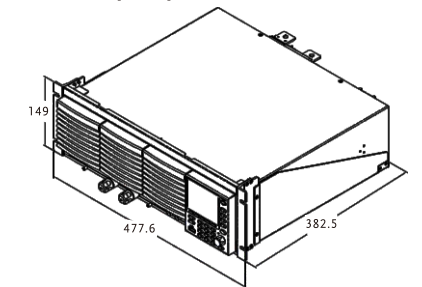


GRA-414-E Rack Mount Kit (EIA)

For : PEL-3021/3041/3111



GRA-414-E Rack Dimension (mm)

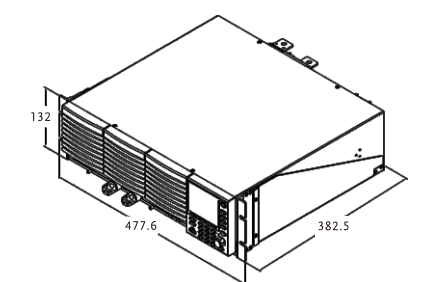


GRA-415 Rack Adapter Kit

Rack Mounting (19", 6U) , For : GSP-9300



GRA-415 Rack Dimension (mm)

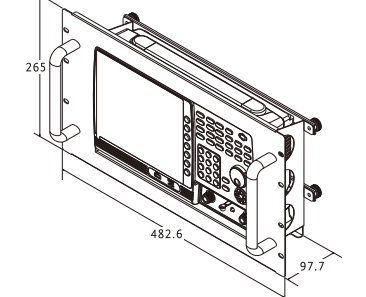


Accessories

GRA-417 Rack Adapter Kit

Rack Mounting (19", 4U)
For : GPT-9900/9800/9600 Series



GRA-417 Rack Dimension (mm)

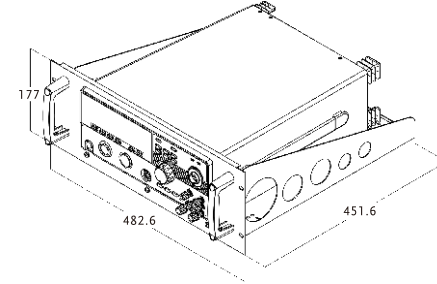


GRA-419 JIS Rack Adapter Kit

For : PCS-1000



GRA-419 JIS Rack Dimension (mm)

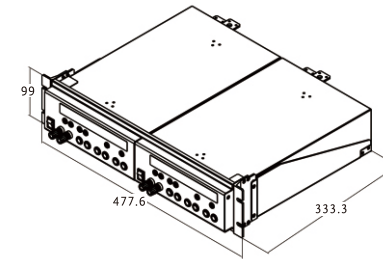


GRA-419 EIA Rack Adapter Kit

For : PCS-1000



GRA-419 EIA Rack Dimension (mm)

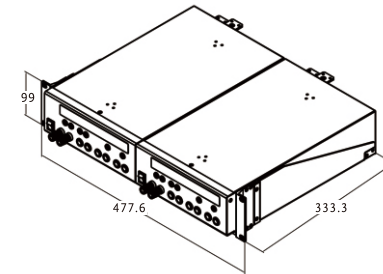


GRA-420 Rack Adapter Kit

Rack Mounting (19", 6U), For : GDM-2000A Series



GRA-420 Rack Dimension (mm)

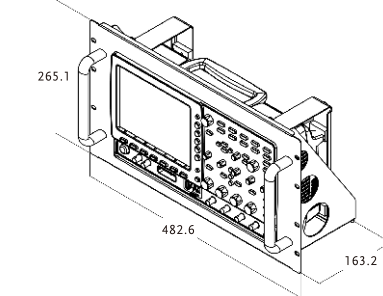


GRA-422 Rack Adapter Kit

Rack Mounting (19", 2U),
For : GDM-8261A/8255A/8342/8341/8351



GRA-422 Rack Dimension (mm)

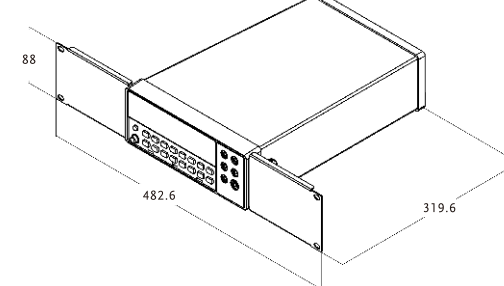


Accessories

GRA-423 Rack Adapter Kit

Rack Mounting (19", 2U),
For : APS-7000 Series



GRA-423 Rack Dimension (mm)

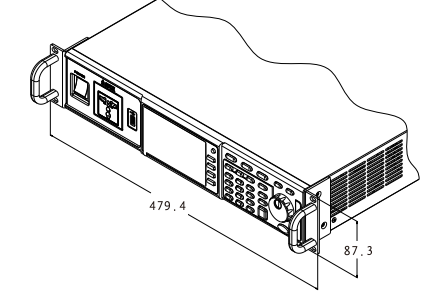


GRA-424 Rack Adapter Kit

Rack Mounting (19", 2U),
For : PSB-2000 Series



GRA-424 Rack Dimension (mm)

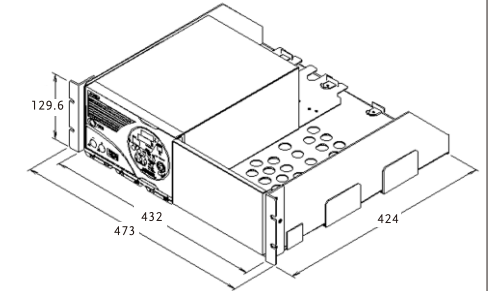


PEL-002 Rack Mount Kit

For : PEL-2000 Series




PEL-002 Rack Dimension (mm)

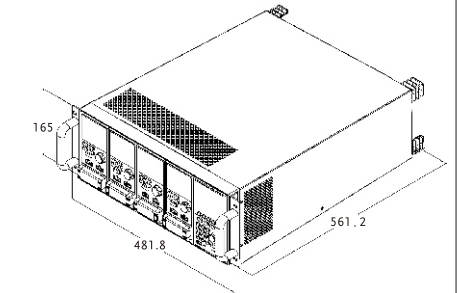


GTC-001

Instrument Cart (Shelf Loading 30kg)
U.A. Type Input Socket
470(W) x 430(D) x 820(H)mm
For: All Product



GTC-002

Instrument Cart (Shelf Loading 30kg)
U.A. Type Input Socket
330(W) x 430(D) x 820(H)mm
For: All Product



NOTE

GW INSTEK WINS TAIWAN EXCELLENCE AWARD



GW INSTEK WINS TECHNOLOGY INNOVATION AWARD



Your Most Trustworthy Partner