

# Keysight Technologies I<sup>2</sup>C and SPI Protocol Triggering and Decode For Infiniium 9000 and S-Series Oscilloscopes

Data Sheet



This application is available in the following license variations.

- Fixed to an oscilloscope
- Floating license
  - Server-based license
  - Transportable license

## Easily debug and test designs that include I2C or SPI protocols using your Infiniium oscilloscopes

Lower-speed serial bus interfaces such as I<sup>2</sup>C (inter-integrated circuit) and SPI (serial peripheral interface) are widely used today in electronic designs for chip-to-chip communication. In many designs these serial buses tend to provide content-rich points for debug and test. However, since these protocols transfer bits serially, using a traditional oscilloscope has limitations. Manually converting captured 1's and 0's to protocol requires significant effort, can't be done in real-time, and includes potential for human error. In addition, traditional scope triggers are not sufficient for specifying protocol-level conditions.


Extend your scope capability with I<sup>2</sup>C and SPI Triggering and Decode application. This application makes it easy to debug and test designs that include I<sup>2</sup>C or SPI protocols using your Infiniium oscilloscopes.

- Set up your scope to show I2C or SPI protocol decode in less than 30 seconds.
- Get access to a rich set of integrated protocol-level triggers.
- Save time and eliminate errors by viewing packets at the protocol level.
- Use time-correlated views to quickly troubleshoot serial protocol problems back to their timing or signal integrity root cause.




### Easy to find

Turn decode on/off via the "Serial Decode" button on the front of the instrument or in the "Setup" menu. View decode embedded on the waveform display or in the protocol viewer listing window. (See pages 4-5)

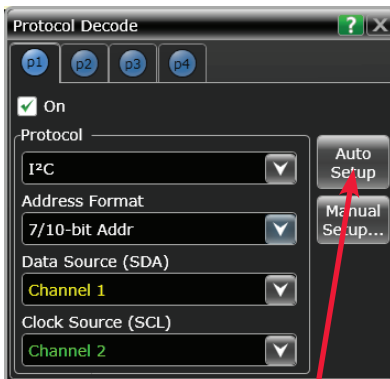

### 30 Second SPI or I2C Setup

Configure your oscilloscope to display protocol decode in under 30 seconds. Use "Auto Setup" to automatically configure sample rate, memory depth and threshold and trigger levels.

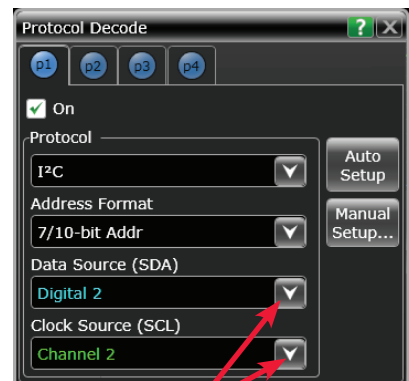

### Support for both analog and digital channels

Acquire serial buses using any combination of scope or digital channels. Using digital channels on MSO models preserves analog channels for viewing other time-correlated signals.

# I<sup>2</sup>C and SPI protocol triggering and searching

Get access to a rich set of integrated protocol level triggers. The application includes a suite of configurable protocol-level trigger conditions specific to I<sup>2</sup>C and SPI. When serial triggering is selected, the application enables special real-time triggering hardware inside the scope.

Hardware-based triggering ensures that the scope never misses a trigger event when armed. This hardware takes signals acquired using either scope or digital channels and reconstructs protocol frames. It then inspects these protocol frames against specified protocol-level trigger conditions and triggers when the condition is met.




### I<sup>2</sup>C Trigger Setup

Choose a combination of address, read/write, address acknowledge and data values for I<sup>2</sup>C triggers.




### SPI Trigger Setup

Quickly access protocol triggering via the scope's trigger menu. Specify SPI trigger in HEX, binary, or decimal up to 200 bits.

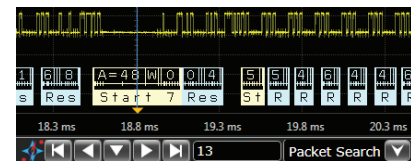


### Quickly find occurrences

Quickly move to next occurrence of a specified event. Jump to the next or previous occurrence of the specified event.

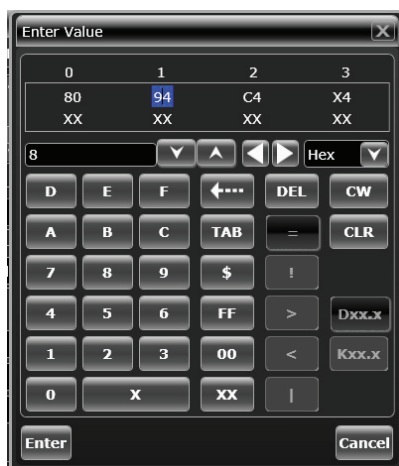

### Payload editor

Use the payload editor to specify data values word by word. Operators give additional triggering flexibility.

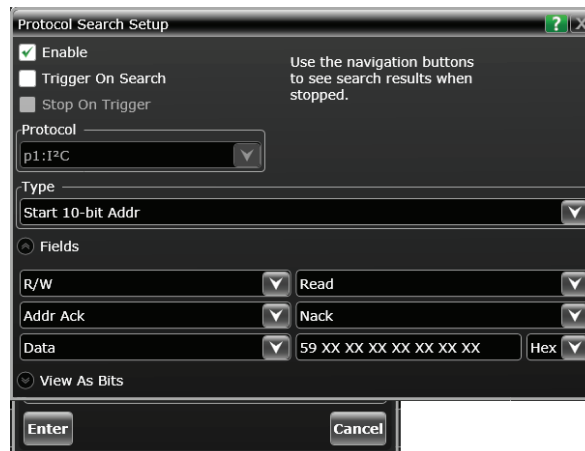

### Post-acquisition searching

Search acquired protocol listing using a menu that is identical to the trigger menu.

# SPI protocol decode




## SPI protocol decode with precise time-correlation between waveforms and listing

The Keysight Technologies, Inc. SPI protocol viewer includes correlation between the waveforms and the selected packet. The selected packet, highlighted blue row in the listing, is time-correlated with the blue line in the waveform display. Move the blue tracking marker in time through waveforms and the blue bar will automatically track in the packets window. Or, scroll through the packet viewer and highlight a specific packet. The time-correlation tracking marker will move to the associated point in the waveform.



## Support for 2, 3, and 4-Wire SPI

The application supports 2-, 3-, and 4-wire SPI. Use digital channels on MSO models to preserve analog channels for simultaneously viewing other signals.

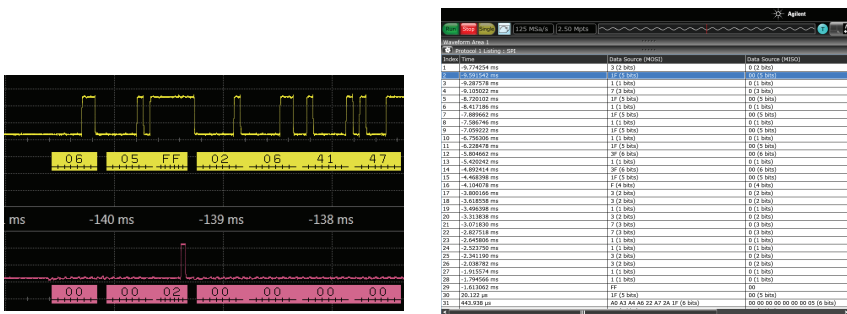


## SPI decode embedded in waveform area

Utilize the oscilloscope waveform area to display decode information. For SPI, minor ticks indicate clock transitions and major ticks show the beginning and end of each word in the serial packet.

## Full screen SPI listing


Fill the entire display with compact protocol information using the full screen listing. The protocol viewer window shows the index number, time stamp value, and data content for each serial packet in the list. Scroll through all decoded serial packets to find events of interest or errors in the transmission. Data in the listing window can be saved to a .csv or .txt file for off-line analysis or documentation.

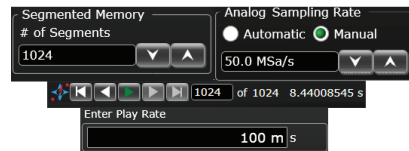


## Long Time Captures using Segmented Memory

Capture seconds to days of serial protocol. The scope fills memory as each acquisition sees its trigger condition. Segmented memory uses time tags to track time between segment acquisitions.


# I<sup>2</sup>C protocol decode

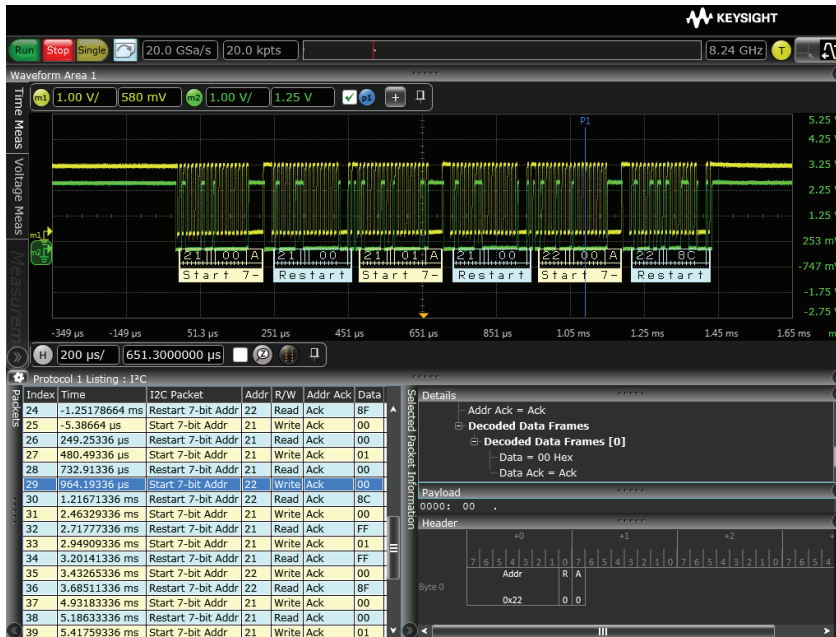


Quickly move between physical and I<sup>2</sup>C protocol layer information using the time-correlated tracing marker. Display protocol content using embedded decode in the waveform area. Or, see protocol events in a compact listing format using the industry's first scope based multi-tab protocol viewer. For I<sup>2</sup>C minor tick marks indicate clock transitions. Major tick marks indicate sections of the serial packet such as address, acknowledge, and data.

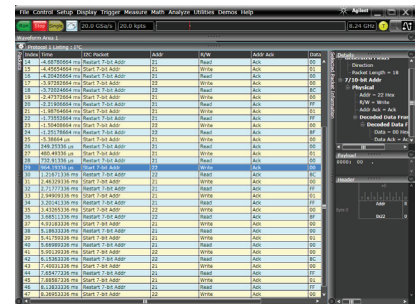

Fill the entire display with compact protocol information. The protocol viewer shows index number, time stamp, and data content for each serial packet. Listing content can be saved to a .csv or .txt file for off-line analysis or documentation. Use search capability to quickly navigate through an acquisition.

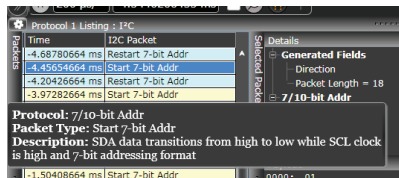

Details tab breaks the packets into easy-to-read textual fields. Hovering shows additional detail.

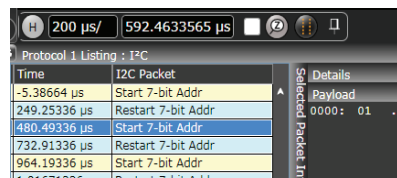

Payload tab shows data carried by the packet in byte-by-byte HEX and ASCII.



Header tab shows packets in a data book format. Hovering at any field reveals additional detail.

## I<sup>2</sup>C specifications and characteristics

I <sup>2</sup> C source (clock and data)	Analog channels 1, 2, 3, or 4 MSO models can additionally use digital channels D0 to D15 any waveform memory
Max clock/data rate	Any waveform memory up to 3.4 Mbps (automatic)
Auto Setup	Automatically configures scope settings for proper I <sup>2</sup> C decode and protocol triggering
Triggering	Start and re-start 7-bit address Start and re-start 8-bit address Start and re-start 10-bit address Start and re-start 11-bit address Specify value for 3 fields choosing between the following Read or write Address (value in HEX or binary) Address acknowledge Data (up to 20 bytes (specify in HEX, binary, ASCII, or decimal) Operators include: = on 8-bit word boundaries.

## SPI specifications and characteristics

SPI protocols supported	2-wire SPI signals: data source and clock source 3-wire SPI signals: data source, clock source, and chip select source 4-wire SPI signals: data source (MOSI), clock source, chip select source, data source (MISO)
SPI source (all signals)	Analog channels 1, 2, 3, or 4 MSO models can additionally use digital channels D0 to D15
Max clock/data rate	Up to 50 Mbps (automatic)
Autoset	Automatically configures scope settings for proper SPI decode and protocol triggering
Decode word size	User-selectable from 4 to 32 bits
Decode bit order	User-selectable LSB or MSB
Triggering	Data length up to 200 bits Number of words * word size < 200 bits Number of words selectable up to 50 Word size selectable from 4 to 32 bits Data operators include: =, OR



## Ordering information


This application is compatible with all 9000 and S-Series oscilloscope models.

Application software		9000 Series		S-Series
I <sup>2</sup> C/SPI triggering and decode	Fixed	Factory-installed	Option 007	N5391B-1FP
		User-installed	N5391B-1NL N5391B-1FP*	N5391B-1FP
	Floating	Transportable	N5391B-1TP*	
		Server-based	N5435A-006	
I <sup>2</sup> C/SPI, RS-232/UART triggering and decode bundle	Fixed	Factory-installed	Option 018	N8800B-1FP
		User-installed	N8800B-1NL N8800B-1FP*	N8800B-1FP
	Floating	Transportable	N8800B-1TP*	
		Server-based		

\* Requires Infiniium 5.0 or above

## Related literature

Publication title	Publication type	Publication number
<i>Infiniium S-Series Oscilloscopes</i>	Data sheet	5991-3904EN
<i>Infiniium 9000 Series Oscilloscopes</i>	Data sheet	5990-3746EN
<i>Infiniium 9000 H-Series Oscilloscopes</i>	Data sheet	5991-1520EN

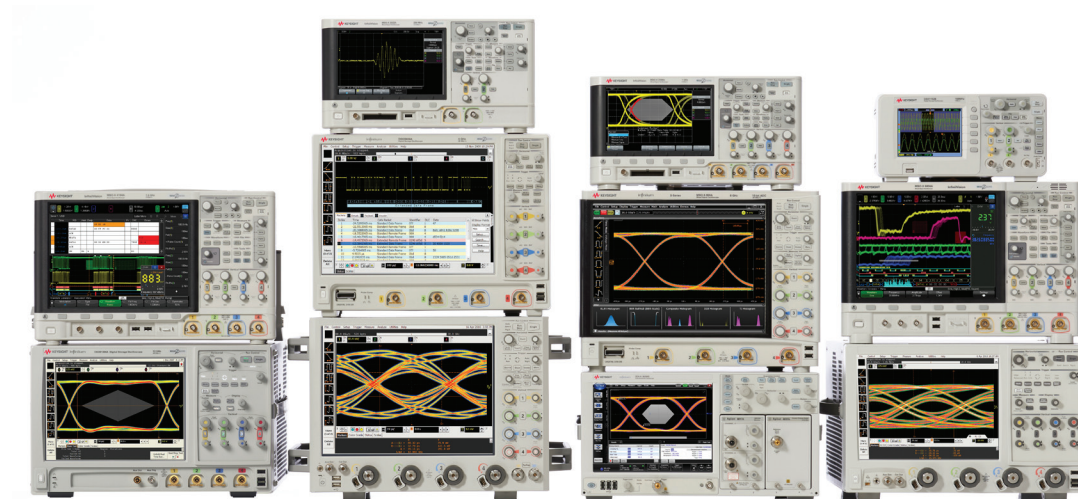

### Keysight Technologies Oscilloscopes

Multiple form factors from 20 MHz to > 90 GHz | Industry leading specs | Powerful applications

**myKeysight**

**myKeysight**

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.



[www.axiestandard.org](http://www.axiestandard.org)

AdvancedTCA<sup>®</sup> Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA<sup>®</sup>, AdvancedTCA<sup>®</sup>, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



[www.lxistandard.org](http://www.lxistandard.org)

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.



[www.pxisa.org](http://www.pxisa.org)

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.



**Three-Year Warranty**

[www.keysight.com/find/ThreeYearWarranty](http://www.keysight.com/find/ThreeYearWarranty)

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



**Keysight Assurance Plans**

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



[www.keysight.com/quality](http://www.keysight.com/quality)

Keysight Technologies, Inc.  
DEKRA Certified ISO 9001:2008  
Quality Management System

**Keysight Channel Partners**

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/9000\\_I2C-SPI](http://www.keysight.com/find/9000_I2C-SPI)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

**Americas**

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

**Asia Pacific**

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

**Europe & Middle East**

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
(BP-07-10-14)