

## Weight Transmitters

### FEATURES

- Microprocessor-based weight transmitter
- Integral multi-cell summing circuit
- Standard digital RS-485 output
- Optional analog 0–10 V and 4–20 mA outputs
- Optional Modbus RTU or Allen-Bradley remote I/O protocol
- Fault protected transducer excitation

### APPLICATIONS

- Inventory weighing
- Process weighing
- Silo, bin, and hopper weighing systems

### DESCRIPTION


Self-contained microprocessor based weight transmitters. Both units contain an internal multi-cell summing circuit, 10 or 15 V excitation, and a digital RS-485 output. Analog 0–10 V and 4–20 mA outputs are available as an option. DXp transmitters are designed to be field mounted within the standard cable length of the load cells and are available with NEMA 4, 4X, or explosion proof enclosures. The DXp-10 offers 20,000 counts of digital resolution with a response time of 400 ms. For high speed batch and packaging applications, the DXp-15 offers 50,000 counts of digital resolution with a response time of 50 ms.

DXp-15 units are available with Allen-Bradley Remote I/O or Modbus RTU protocol for convenient interface with host PLC/ DCS systems.



The DXp-10 and DXp-15 transmitters are designed for inventory and process weighing systems requiring transmission of high accuracy weight data to a computer or other control device. Availability of a wide variety of digital interface options simplifies communication of weight data to a host computer or PLC. The result is improved product quality and material control.

### CONFIGURATION

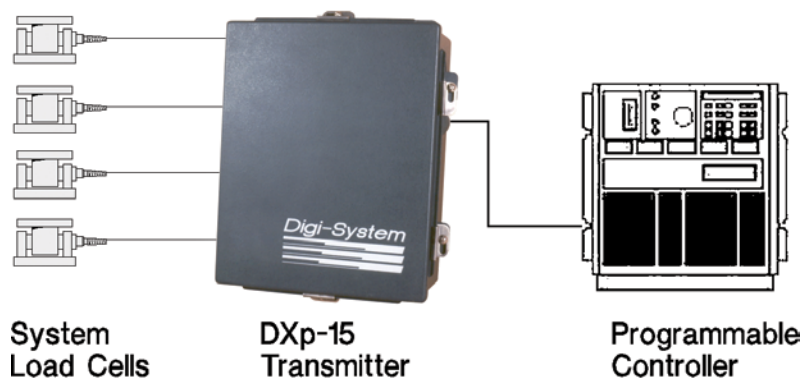

## Weight Transmitters

SPECIFICATIONS		PARAMETER	VALUE
<b>PERFORMANCE</b>		<b>PARAMETER</b>	<b>VALUE</b>
Resolution DXp-10	20,000 counts	<b>ENCLOSURE</b>	
Resolution DXp-15	50,000 counts	Dimensions (NEMA 4/4X)	11.5×8.0×4.3 in H×W×D
Sensitivity DXp-10	1.0 µV/count	Explosion Proof	12.875×10.875×8.188 in H×W×D
Sensitivity DXp-15	0.5 µV/count	<b>OPTIONS – ISOLATED ANALOG OUTPUT(S)</b>	
Full Scale Range	25 or 35 mV (selectable)	Type	12 bit D/A conversion
Dead Load Range	100%	Voltage	0 to 10 V (25 kΩ min. load)
Input Impedance	10 MΩ, min.	Current	4 to 20 mA (1,000 Ω max. load)
Load Cell Excitation (Selectable)	10 V for up to eight 350 Ω load cells (250 mA) 15 V for up to six 350 Ω load cells (260 mA)	<b>SERIAL COMMUNICATION SIMPLEX DATA OUTPUT (STANDARD)</b>	
Linearity	±0.01% of full scale	Interface Type	RS-485 (simplex)
Humidity	5 to 90% rh, non-condensing	Data Format	Simplex ASCII data 7 Data Bit Even Parity 1 Stop Bit
Common Mode Rej.	100 db or better at or below 35 Hz	<b>SERIAL COMMUNICATION TERMINAL/COMPUTER INTERFACE (OPTIONAL)</b>	
Normal Mode Rej.	100 db or better at or below 35 Hz	Interface Type	RS-485 Half Duplex (Standard)
Conversion Speed DXp-10	400 ms	Baud	1,200 or 9,600
Conversion Speed DXp-15	50 ms	Protocol	ASCII duplex command/ response format
<b>TEMPERATURE EFFECTS</b>		<b>APPROVALS</b>	
Span	±2 ppm/°C typical, 7 ppm/°C max.	FM (Factory Mutual)	3611 (Class I, II, III; Div.1, 2; Groups A-G)
Zero	±2 ppm/°C	CSA	C22.2 (Class I, II, III; Div.1, 2; Groups A-G)
Operating Temperature	-10 to 55°C (12 to 131°F)	<b>MODBUS RTU PROTOCOL (DXP-15 OPTION ONLY)</b>	
Storage Temperature	-20 to 85°C (-4 to 185°F)	<b>ALLEN-BRADLEY REMOTE L/O (DXP-15 OPTION ONLY)</b>	
<b>ELECTRICAL</b>			
Voltage	115/230 VAC ±15% 50/60 Hz		
Power	10 W max.		
Parameter Storage	EEPROM		
EMI/RFI	Shielded from typical industrial interference		

**NOTE:** Allen-Bradley is a trademark of Allen-Bradley Co., Inc. Modbus is a trademark of Schneider.

BLH Nobel is continually seeking to improve product quality and performance. Specifications may change without notice.



## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.