

## **Precision Calibrator**

#### **FEATURES**

- Accurate to 0.05% of reading
- Precisely calibrates full bridge strain gage and transducer instrumentation
- Five ranges 55 calibration points
- Test/confirm instrument peak/valley, auto tare, and auto zero circuitry

#### **APPLICATIONS**

• Precise calibration for 120- and 350-ohm systems


#### **DESCRIPTION**

The Model 625 Precision Calibrator is a compact, high-accuracy, portable resistance network specifically designed to simulate the output of full bridge strain gage type transducers. Through the use of a highly stable resistance network, the calibrator provides an accurate method of simulating a 120-ohm or 350-ohm transducer system. This circuitry provides 55 precision mV/V output signals in five ranges of 11 settings each.

When powered with a known regulated voltage, the calibrator can substitute for one or more transducers to check the calibration, linearity, sensitivity, or for general troubleshooting of an indicator, recorder, or a complete load or force measuring system.

The Calibrator can also be used with a known DC or AC supply for checking and calibrating any millivolt or millivolt/volt instrument.



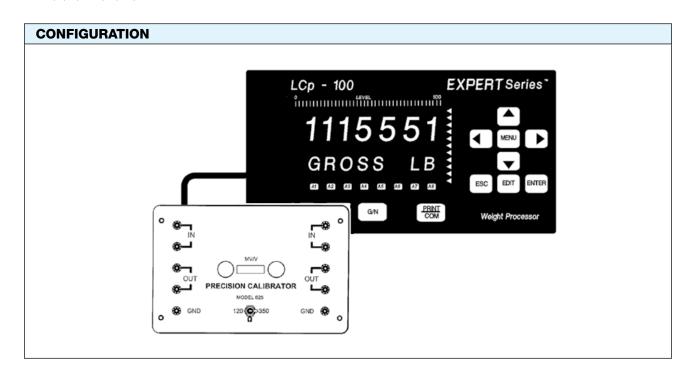


Document No.: 12188 Revision: 27-June-2016 Technical contact: <u>blhnobel.usa@vpgsensors.com</u>,
Europe: <u>blhnobel.eur@vpgsensors.com</u>, Asia: <u>blhnobel.asia@vpgsensors.com</u>



#### **Precision Calibrator**

SPECIFICATIONS			
PARAMETER	VALUE	PARAMETER	VALUE
Output Accuracy	Each point accurate to 0.05% of reading, or 0.02% of range, or 0.003 mV/V, or ±2 mV, which ever is greater	Zero Stability	Less than 2 μV
		Calibration Stability	Less than 0.02‰/year
		Bridge Resistance	120 Ω or 350 Ω Input
Output Ranges	0-0.5 mV/V in 10 steps of 0.05 mV/V each 0-1 mV/V in 10 steps of 0.1 mV/V each 0-2 mV/V in 10 steps of 0.2 mV/V each 0-5 mV/V in 10 steps of 0.5 mV/V each 0-10 mV/V in 10 steps of 1.0 mV/V each	Voltage Level	120 Ω: 0–12 VDC; 350 Ω: 0–25 VDC
		Operating Temp.	0-120°F (18-49°C)
		Dimensions, HxWxD	6×9×6 in. (152.4×228.6×152.4 mm)
		Weight	3.75 lbs (1.7 kg)

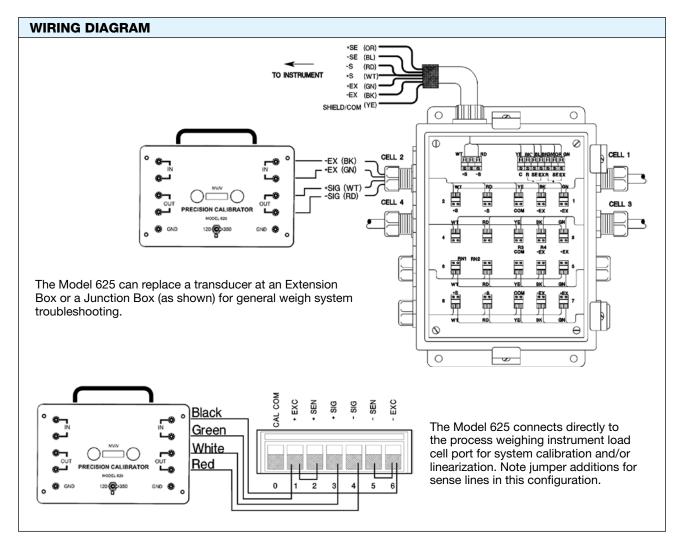

BLH Nobel is continually seeking to improve product quality and performance. Specifications may change accordingly.



# **Legal Disclaimer Notice**

Vishay Precision Group, Inc.

### **Disclaimer**

ALL PRODUCTS. PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.

Document No.: 63999 Revision: 15-Jul-2014