

## ATEX-Approved Load Cell Transmitter with HART Communication

### FEATURES

- ATEX approved Ex IIC
- Two-wire 4 mA–20 mA output with error signaling
- HART 7 Communication for
  - System diagnostics
  - Process Data
- IP67 protection level (when mounted in load cell)
- M12 connector or fixed cable connection through cable gland




### APPLICATIONS

- Cranes
- Winches
- Mooring
- Chain stoppers
- Tension

### DESCRIPTION

Load cell transmitter for off-shore and harsh industrial applications. The transmitter is field-replaceable without re-calibration of the transmitter or the load cell. HART Communication is available for diagnostics and process data. The load cell transmitter is designed to be embedded in the load cells and is approved for use in hazardous areas.

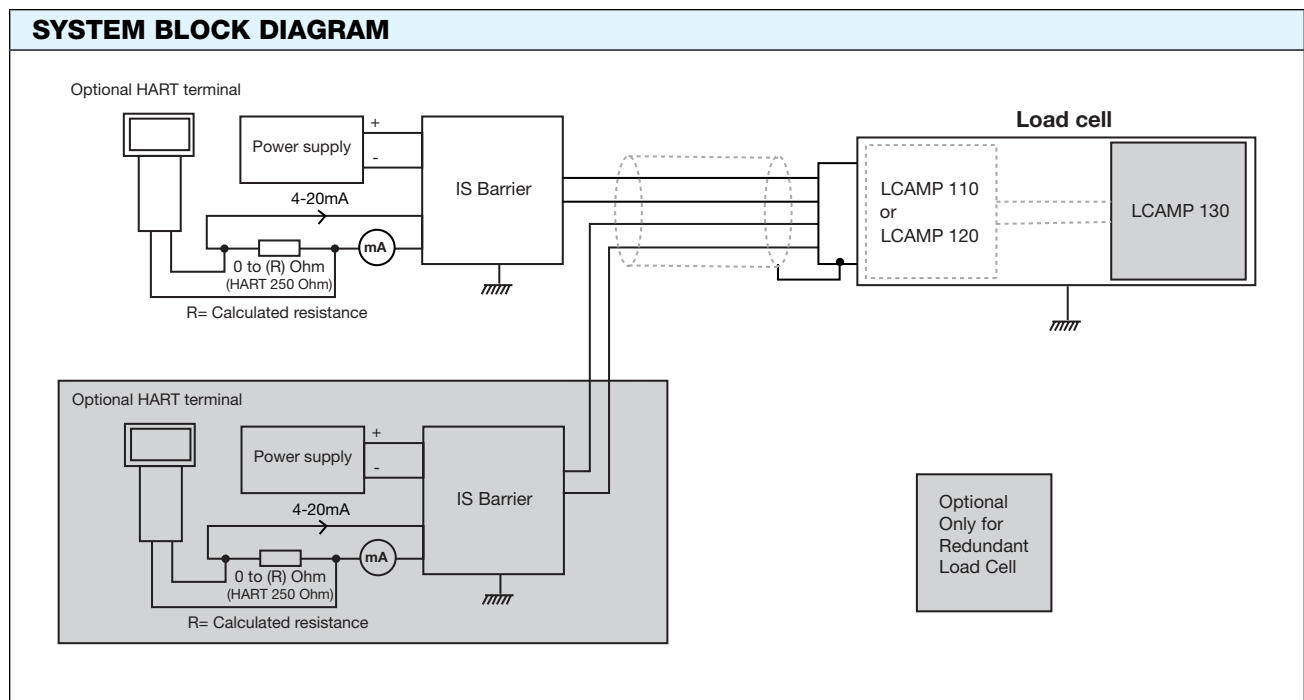

## ATEX-Approved Load Cell Transmitter with HART Communication

SPECIFICATIONS			
PARAMETER	VALUE		
<b>APPROVALS</b>			
<b>ATEX intrinsic safety</b>	EN 60079-0, EN 60079-11, EN 50303 Ex ia I Ma, Ex ia IIC T4 Ga, Ex ia IIIC T79°C Da		
<b>U<sub>i</sub></b>	30 V		
<b>P<sub>i</sub></b>	0.7 W		
<b>I<sub>i</sub></b>	100 mA		
<b>C<sub>i</sub></b>	57 nF (≤66 nF including cable)		
<b>L<sub>i</sub></b>	4.4 μH		
<b>IECEx intrinsic safety</b>	IEC 60079-0, IEC 60079-11		
<b>Electromagnetic compatibility (EMC)</b>	EN 61326-1		
<b>Emission</b>	CISPR 11 class B		
<b>ENVIRONMENTAL CONDITIONS</b>			
PARAMETER	MIN.	TYP.	MAX.
<b>Environmental protection/ IP rating (assembled load cell)</b>		IP67	
<b>Operating Temperature (T<sub>amb</sub>)</b>	-45°C -49°F		+70°C +158°F
<b>In intrinsic-safe application (T<sub>amb</sub>)</b>	-45°C -49°F		+70°C +158°F
<b>ANALOG OUTPUT</b>			
<b>Current</b>	3.2 mA		22.8 mA
<b>Rated output (RO)</b>		20 mA	
<b>Zero</b>		4 mA	
<b>SYSTEM PARAMETERS</b>			
<b>Accuracy</b>	See load cell datasheet		
<b>Response time: Fast mode</b>		5 ms	
<b>Response time: HART® compliant mode</b>		50 ms	
<b>Noise: Fast mode</b>		0.05% of RO	
<b>Noise: HART® compliant mode</b>		0.02% of RO	
<b>Supply voltage (E): Standard application</b>	E = 0.0236*R+10.5 V	24 V	42 V
<b>Supply voltage (E): Intrinsic-safe application</b>		24 V	30 V
<b>Load impedance (R): Standard application</b>	0 Ω		R = (E-10.5)/0.0236 Ω (HART max. 600 Ω)
<b>Load impedance (R): HART® communication</b>	230 Ω	250 Ω	
<b>Insulation resistance</b>	4 GΩ		
<b>LOAD CELL STRAIN GAGE</b>			
<b>Impedance</b>		2000 Ω	
<b>ATEX CONDITIONS</b>			
<b>Cable length (L) for Ex ia IIC</b>			L = 9.0/(nF/m) <sup>(1)</sup> m
<b>Cable length (L) for Ex ia IIB</b>			L = 503/(nF/m) <sup>(1)</sup> m
<b>Insulation test</b>		500 V <sub>RMS</sub>	
<b>CONNECTOR PIN-OUT / WIRES COLOR CODE</b>			
<b>M12 Connector</b> 1: LCAMP 130 current return 2: LCAMP 130 current output 3: LCAMP 110 current output 4: LCAMP 110 current return		<b>Fixed cable</b> Yellow: LCAMP 130 current return Green: LCAMP 130 current output White: LCAMP 120 current output Brown: LCAMP 120 current return	

<sup>(1)</sup> Cable capacitance value per meter in nF

## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.

## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.