


0.00" 0.25" 0.50" 0.75" 1.00" 1.25" 1.50" 1.75" 2.00"

PROPRIETARY STATEMENT: ULTRAVOLT INC.
CONFIDENTIAL DRAWING

REVISIONS				
LTR	DESCRIPTION	BY	DATE	APPD
A	NEW RELEASE	D.S.	2/3/00	J.M.
B	ADDED DWG NO. PER ECO #2137	D.S.	01/12/05	J.M.
C	REVISED PER ECO # 2743	SRO	3/1/02	D.P.
C1	REVISED PER ECO # UV3134	SG	12/02/03	SRO
D	REVISED PER ECO # UV3247	RG	11/12/05	S.O.
E	REVISED PER ECO EC-00312-UV	SRO	8/18/08	DB

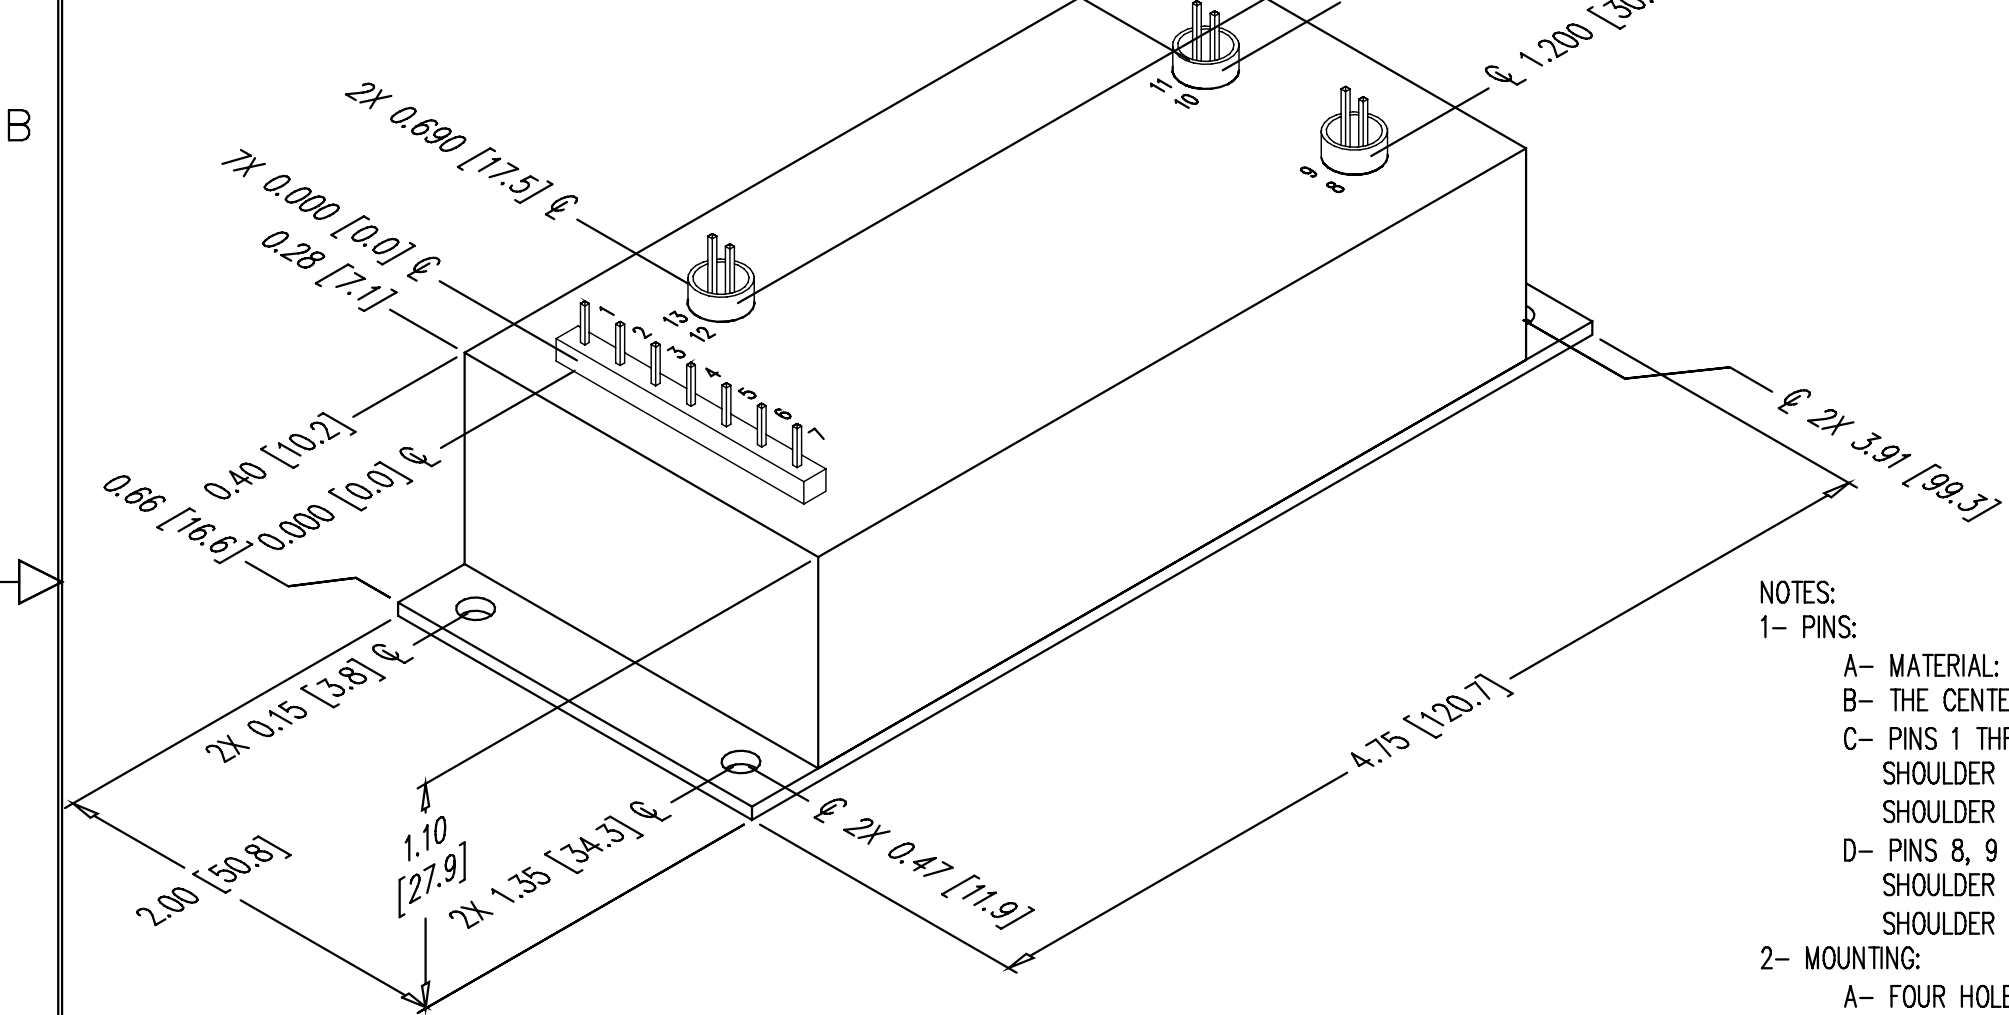

NOTES:
1- PINS:
A- MATERIAL: GOLD PLATED 0.025 [0.63] SQ.
B- THE CENTER OF THE PINS AND MOUNTING HOLES ARE LOCATED FROM THE CENTER OF PIN 1.
C- PINS 1 THRU 7 SPACING 0.200 [5.08] ON CENTER, HEIGHT FROM COVER 0.280 [7.11] MIN.
SHOULDER MATERIAL: DIALYL PHTHALATE. 94V0.
SHOULDER SIZE 0.140 [3.5] X 1.400 [35.56] X 0.060 [1.5] MIN HEIGHT FROM COVER.
D- PINS 8, 9 & 10 11 & 12,13 SPACING 0.100 [2.54] ON CENTER, HEIGHT FROM COVER 0.220 [5.60] MIN.
SHOULDER MATERIAL: ULTEM.
SHOULDER SIZE: OD 0.27 [6.86] X ID 0.23 [5.71] X 0.200 [5.0] MIN HEIGHT FROM COVER.
2- MOUNTING:
A- FOUR HOLES Ø0.156 [Ø3.96] THROUGH A 0.062 [1.57] THK PLATE.
3- CONSTRUCTION:
EPOXY FILLED ALUMINUM BOX CHEM FILM PER MIL-C-5541 CLASS 1A.
4- TOLERANCE:
A- OVERALL +/-0.050 [1.27]
B- PIN TO PIN +/-0.015 [0.38]

A

A

UNLESS OTHERWISE SPECIFIED DIMENSION ARE IN INCHES TOLERANCES ARE: 2 PL DEC ± .02 FRACT ± 1/64 3 PL DEC ± .010 ANGLES ± 2'			CUSTOMER		ULTRAVOLT, INC. 1800 OCEAN AVE. FRNT, RONKONKOMA, N.Y. 11779 1-631-471-4444 OUTLINE DUAL AUX METAL CASE
HOLE DIA			TOLERANCES	DRAWN <i>S. Orban</i> DATE 02/04/02	
.0135 THRU .125			+ .004 - .004	CHKD <i>D. Parant</i> 3/20/02	
.126 THRU .250			+ .005 - .005	MFG <i>N/A</i>	
.251 THRU .500			+ .006 - .006	MFG ENGR <i>N/A</i>	
.501 THRU .750			+ .008 - .008	PROCESS <i>N/A</i>	
.751 THRU 1.000			+ .010 - .010	QA <i>N/A</i>	
1.001 THRU 2.000			+ .012 - .012	CHIEF ENG <i>N/A</i>	
DASH NUMBER	NEXT ASSY	USED ON	CFN: OL-013_revE_A-C_AUX_CAN.dwg		B PART NUMBER: OL-013 REV E
APPLICATION			SCALE NONE DO NOT SCALE THIS DRAWING SHEET 1 OF 1		

2

1