



## Evaluation Kit Information

### General Description

The MAX619 evaluation kit (EV kit) is a 3V to 5V charge-pump DC-DC converter capable of driving loads up to 50mA. The circuit consists of the SOIC and four surface-mount capacitors on a single-layer printed circuit board.

### Quick Start

The MAX619 EV Kit is fully assembled and tested. Follow the steps below to verify board operation.

**Do not turn on the power supply until all connections are completed.**

1. Connect a 2V to 3.6V supply to the pad marked VIN. The ground connects to the GND pad.
2. Connect a voltmeter and load (if any) to the VOUT pad.
3. Place the shunt on JU1 across the ON side. This grounds the SHDN pin to enable the device. Moving the shunt to the OFF side connects SHDN to VIN to disable the device. Remove the shunt if an external signal is connected to the SHDN pad.
4. Turn on the power and verify that the output is  $5V \pm 4\%$ .

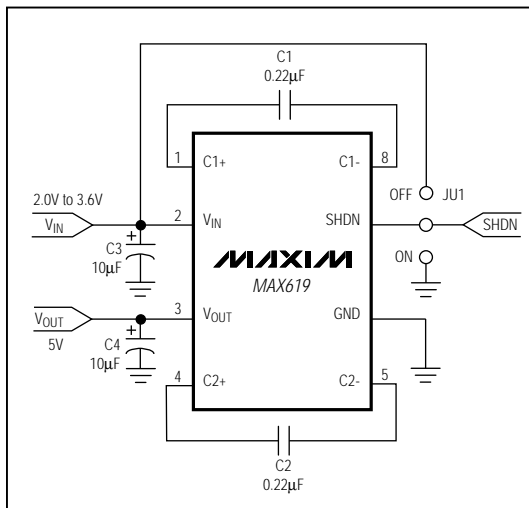


Figure 1. MAX619 EV Kit Schematic

### Features

- ◆ 2.0V to 3.6V Input Range
- ◆ Up to 50mA Output Current
- ◆ 1µA Shutdown Current

### Ordering Information

PART	TEMP. RANGE	BOARD TYPE
MAX619EVKIT-SO	0°C to +70°C	Surface Mount

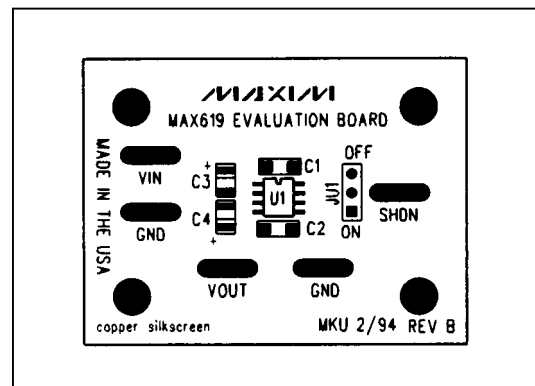


Figure 2. Component Placement Guide—Component Side

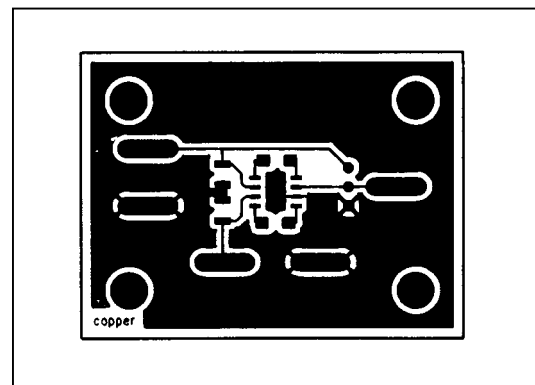


Figure 3. PC Board Layout—Component Side

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

8 Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 (408) 737-7600